

WIND DATA REPORT

Bishop and Clerks

September 1, 2003 – November 30, 2003

Prepared for

Massachusetts Technology Collaborative
75 North Drive
Westborough, MA 01581

by

James F. Manwell
Anthony F. Ellis
Christopher N. Elkinton

June 11, 2004

Renewable Energy Research Laboratory
University of Massachusetts, Amherst
160 Governors Drive, Amherst, MA 01003

www.ceere.org/rerl • (413) 545-4359 • rerl@ecs.umass.edu



TABLE OF CONTENTS

Table of Contents.....	1
Table of Figures.....	1
Executive Summary.....	2
SECTION 1 - Station Location.....	3
SECTION 2 - Instrumentation and Equipment.....	3
SECTION 3 - Data Collection and Maintenance.....	5
Data Statistics Summary.....	6
SECTION 4 - Significant Meteorological Events.....	6
SECTION 5 - Data Recovery and Validation.....	6
Test Definitions.....	7
Sensor Statistics.....	8
SECTION 6 - Data Summary.....	8
SECTION 7 - Graphs.....	10
Wind Speed Time Series.....	10
Wind Speed Distributions (update).....	11
Monthly Average Wind Speeds.....	11
Diurnal Average Wind Speeds.....	12
Turbulence Intensities.....	13
Wind Roses.....	14
APPENDIX A - Sensor Performance Report.....	15
Test Definitions.....	15
Sensor Statistics.....	15
APPENDIX B - Plot Data.....	16
Wind Speed Distribution Data.....	16
Monthly Average Wind Speed Data.....	17
Diurnal Average Wind Speed Data.....	18
Wind Rose Data.....	19

TABLE OF FIGURES

Figure 1 - Site location at Bishop & Clerks light.....	3
Figure 2 - Anemometry mast and data collection equipment at Bishop & Clerks.....	4
Figure 3 - Railing stiffener connecting PV bracket to rail.....	5
Figure 4 - Wind Speed Time Series, September 2003 – November 2003.....	10
Figure 5 - Wind Speed Distribution, September 2003 – November 2003.....	11
Figure 6 - Monthly average wind speed.....	11
Figure 7 - Diurnal Wind Speed, September 2003 – November 2003.....	12
Figure 8 - Turbulence Intensity vs Wind Speed, September 2003 – November 2003.....	13
Figure 9 - Wind Rose, September 2003 – November 2003.....	14

EXECUTIVE SUMMARY

This wind measurement station is installed on the Bishop & Clerks US Coast Guard (USCG) automated lighthouse, almost 3 miles south-southeast of Pt. Gammon on Cape Cod, MA. Installed in November of 2000, the wind monitoring station is in continuous operation to this day. The two anemometers and wind vanes are mounted 15 m (49 ft) above the Mean Low Water Level.

During the period covered by this report, September 2003 – November 2003, the mean recorded wind speed was 7.56 m/s (17.01 mph) and the prevailing wind direction was from the west-southwest. The gross data recovery percentage (the actual percentage of expected data received) was 100% and the net data recovery percentage (the percentage of expected data which passed all of the quality assurance tests) was 99.615%. Both of these percentages are very high, indicating that the sensors and data logger were performing well.

SECTION 1 - Station Location

Bishop & Clerks was originally a small island south of Hyannis in the 1800's. Over time, it has eroded down to a few exposed rocks. The concrete and stone base of the lighthouse is currently the largest remaining piece above water. The lighthouse is located within the three-mile state limit of Massachusetts's waters, at $41^{\circ}0'-34'-27.6''$ North, $070^{\circ}0'-14'-59.5''$ West (Figure 1). A photo of the lighthouse as it stands today can be seen at www.ceere.org/reerl/reerl_offshore.html. The wind monitoring station at Bishop and Clerks is located on the top of the USCG lighthouse facility. Relative to the Mean Low Water Level, the anemometry is mounted at a height of 15 m (49 ft).

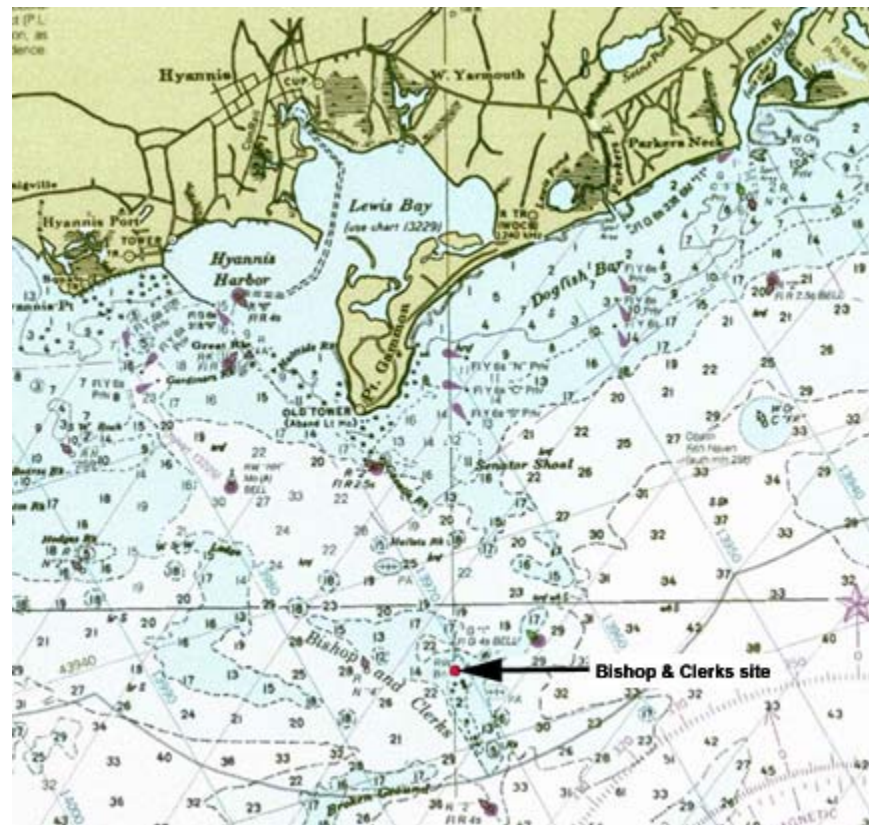


Figure 1 - Site location at Bishop & Clerks light

SECTION 2 - Instrumentation and Equipment

The wind monitoring equipment is mounted on a 12 ft long, 3" diameter, aluminum mast that is secured to the deck railing at the top of the lighthouse (Figure 2). All the remaining monitoring equipment comes from NRG Systems, and consists of the following items:

- Model 9300 Cellogger®, serial # 0258
- Electrical enclosure box with 5 watt PV panel
- Yagi directional antenna and mount
- 2 – #40 Anemometers, standard calibration (Slope - 0.765 m/s, Offset – 0.350 m/s)
- 2 - #200P Wind direction vanes
- 4 – Sensor booms, 43” length
- Lightning rod and grounding cable
- Shielded sensor wire



Figure 2 - Anemometry mast and data collection equipment at Bishop & Clerks

A limitation in this setup is that the mast height is low relative to the diameter of the lighthouse and the fact that the warning light and a PV panel mounted on top of the tower and can interfere with the free flow of air. The mast height is limited by the stiffness of the railing. In fact, it was necessary to reinforce the free end of the railing to the USCG lighthouse PV panel brackets in order to use even the 12 ft mast (Figure 3) which otherwise shook severely in high winds.

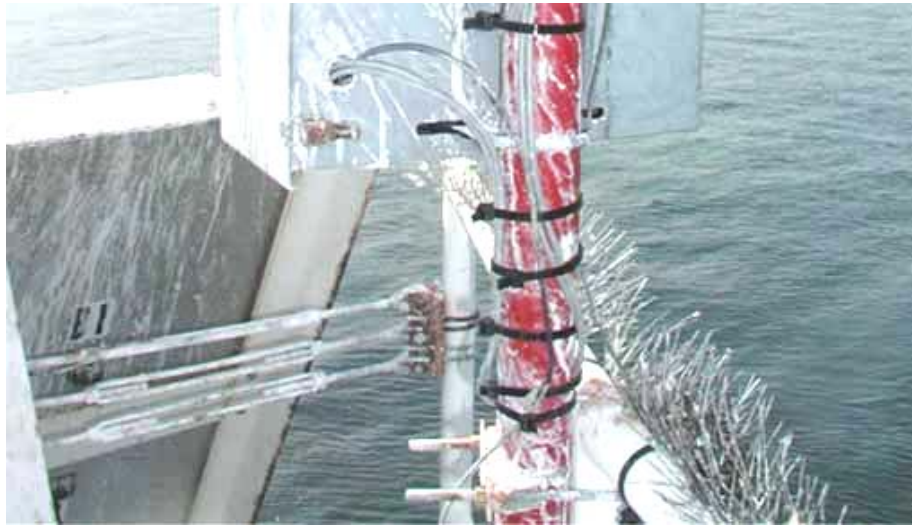


Figure 3 - Railing stiffener connecting PV bracket to rail

The NRG 9300 system logger is equipped with a built-in cell phone so that the data can be transmitted weekly to a PC, located at the University of Massachusetts/ Amherst. The logger samples wind speed and direction once every second. These are then combined into 10-minute averages, and along with the standard deviation for those 10-minute periods, are put into a binary file. These binary files are converted to ASCII text files using the NRG software BaseStation®. These text files are then imported into a database software program where they are subjected to QA tests prior to using the data.

SECTION 3 - Data Collection and Maintenance

The following maintenance/equipment problems occurred during the report period, and the following corrective actions taken:

- No data problems were present.
- No maintenance operations were performed.

Data Statistics Summary

Date	Mean Wind Speed [m/s]	Max Wind Speed [m/s]	Turbulence Intensity []	Prevailing Wind Direction []
Sept 2003	6.64	15.97	0.11	SE
Oct 2003	7.98	21.79	0.11	WSW
Nov 2003	8.04	22.5	0.11	WNW
Sept 03 – Nov 03	7.56	22.5	0.11	WSW

SECTION 4 - Significant Meteorological Events

Three particularly high wind events are observable in the Wind Speed Time Series graph:

- October 15: A wind storm hit most of the eastern US, causing high wind readings from Tennessee to Massachusetts. Block Island, RI, recorded a gust of 50 mph (22.2 m/s).
- November 13-14: A wintry storm with a maximum recorded (in Boston, MA) wind gust of 48 mph (21.3 m/s) knocked out power in several places across Massachusetts.
- November 29: This early winter storm brought more wind than rain. Gusts of 48 mph (21.3 m/s) were recorded in Boston.

SECTION 5 - Data Recovery and Validation

All raw wind data are subjected to a series of tests and filters to weed out data that are faulty or corrupted. Definitions of these quality assurance (QA) controls are given below under Test Definitions and Sensor Statistics. The gross percentage of data recovered (ratio of the number of raw data points received to data points expected) and net percentage (ratio of raw data points which passed all QA control tests to data points expected) are shown below.

Gross Data Recovered [%]	100.0
Net Data Recovered [%]	99.615

The high Gross Data Recovery Percentage is an indication that the logger was recording and transmitting properly. The high Net Data Recovery Percentage is an indication that the sensors were functioning properly and that little or no icing conditions were present.

Test Definitions

All raw data were subjected to a series of validation tests, as described below. The sensors tested and the parameters specific to each sensor are given in the Sensor Performance Report which is included in APPENDIX A. Data which were flagged as invalid were not included in the statistics presented in this report.

MinMax Test: All sensors are expected to report data values within a range specified by the sensor and logger manufacturers. If a value falls outside this range, it is flagged as invalid. A data value from the sensor listed in Test Field 1 (TF1) is flagged if it is less than Factor 1 (F1) or greater than Factor 2. This test has been applied to the following sensors (as applicable): wind speed, wind speed standard deviation, wind direction, temperature, and solar insolation.

$$F1 > TF1 > F2$$

MinMaxT Test: This is a MinMax test for wind direction standard deviation with different ranges applied for high and low wind speeds. A wind direction standard deviation data value (TF1) is flagged either if it is less than Factor 1, if the wind speed (TF2) is less than Factor 4 and the wind direction standard deviation is greater than Factor 2, or if the wind speed is greater than or equal to Factor 4 and the wind direction standard deviation is greater than Factor 3.

$$\begin{aligned} & (TF1 < F1) \\ & \text{or } (TF2 < F4 \text{ and } TF1 > F2) \\ & \text{or } (TF2 \geq F4 \text{ and } TF1 > F3) \end{aligned}$$

Icing Test: An icing event is characterized by the simultaneous measurements of near-zero standard deviation of wind direction, non-zero wind speed, and near- or below-freezing temperatures. Wind speed, wind speed standard deviation, wind direction, and wind direction standard deviation data values are flagged if the wind direction standard deviation (CF1) is less than or equal to Factor 1, the wind speed (TF1) is greater than Factor 2, and the temperature (CF2) is less than Factor 3.

$$CF1 \leq F1 \text{ and } TF1 > F2 \text{ and } CF2 < F3$$

CompareSensors Test: Where primary and redundant sensors are used, it is possible to determine when one of the sensors is not performing properly. For anemometers, poor performance is characterized by low data values. Therefore, if one sensor of the pair reports values significantly below the other, the low values are flagged. At low wind speeds (Test Fields 1 and 2 less than or equal to Factor 3) wind speed data are flagged if the absolute difference between the two wind speeds is greater than Factor 1. At high wind speeds (Test Fields 1 or 2 greater than Factor 3) wind speed data are flagged if the absolute value of the ratio of the two wind speeds is greater than Factor 2.

[$TF1 \leq F3$ and $TF2 \leq F3$ and $abs(TF1 - TF2) > F1$]
or [$(TF1 > F3$ or $TF2 > F3)$ and $(abs(1 - TF1 / TF2) > F2$ or $abs(1 - TF2 / TF1) > F2)$]

Sensor Statistics

Expected Data Points: the total number of sample intervals between the start and end dates (inclusive).

Actual Data Points: the total number of data points recorded between the start and end dates.

% Data Recovered: the ratio of actual and expected data points (this is the *gross data recovered percentage*).

Hours Out of Range: total number of hours for which data were flagged according to MinMax and MinMaxT tests. These tests flag data which fall outside of an expected range.

Hours of Icing: total number of hours for which data were flagged according to Icing tests. This test uses the standard deviation of wind direction, air temperature, and wind speed to determine when sensor icing has occurred. It should be noted that, while this test is tuned to detect sensor icing events, it is possible for the conditions that are representative of icing to occur at other times. The error due to this possibility is considered to be insignificant.

Hours of Fault: total number of hours for which data were flagged according to CompareSensors tests. These tests compare two sensors (e.g. primary and redundant anemometers installed at the same height) and flag data points where one sensor differs significantly from the other.

% Data Good: the filter results are subtracted from the gross data recovery percentage to yield the *net data recovered percentage*.

SECTION 6 - Data Summary

This report contains several types of wind data graphs. Unless otherwise noted, each graph represents data from 1 quarter (3 months). The following graphs are included:

- Time Series – 10-minute average wind speeds are plotted against time.
- Wind Speed Distribution – A histogram plot giving the percentage of time that the wind is at a given wind speed. The maximum percentage is centered around 7 m/s.

- Monthly Average – A plot of the monthly average wind speed over a 12-month period. This graph shows the trends in the wind speed over the year December 2002 – November 2003. The average wind speed for this Fall quarter (7.56 m/s) was lower than the corresponding average speed from last year (8.16 m/s).
- Diurnal – A plot of the average wind speed for each hour of the day. This graph shows a fairly constant wind speed distribution over the course of the day. This level plot was also observed during this quarter last year.
- Turbulence Intensity – A plot of turbulence intensity as a function of wind speed. Turbulence Intensity is calculated as the standard deviation of the wind speed divided by the wind speed and is a measure of the gustiness of a wind resource. Lower turbulence results in lower mechanical loads on a wind turbine. The turbulence intensities recorded at this site have been almost constant at about 0.11. In the graph (below), the turbulence intensity flattens out between 4 and 6 m/s. With an average wind speed of 7.56 m/s, this site, on average, experienced low turbulence conditions.
- Wind Rose – A plot, by compass direction showing the percentage of time that the wind comes from a given direction and the average wind speed in that direction. This wind rose shows only a slight general trend to the west (prevailing wind direction is from the west-southwest). While the winter, spring, and summer quarters usually exhibit a strong prevailing direction, the fall quarter does not, so this quarter's behavior is not unexpected.

SECTION 7 - Graphs

Data for the wind speed histograms, monthly and diurnal average plots, and wind roses are included in APPENDIX B.

Wind Speed Time Series

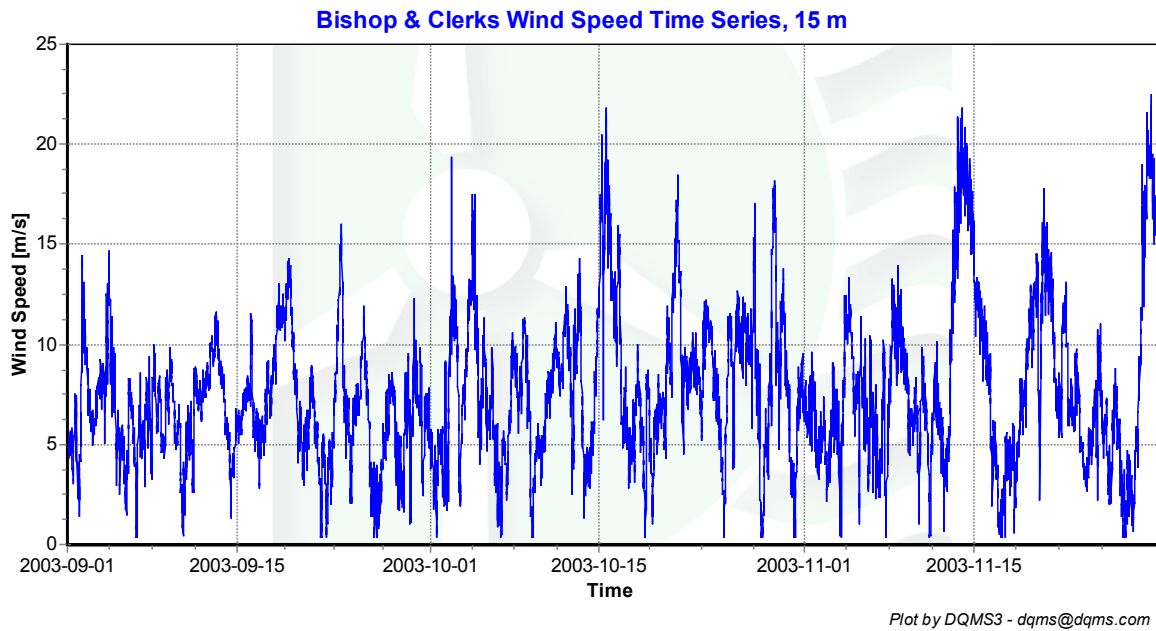


Figure 4 - Wind Speed Time Series, September 2003 – November 2003

Wind Speed Distributions (update)

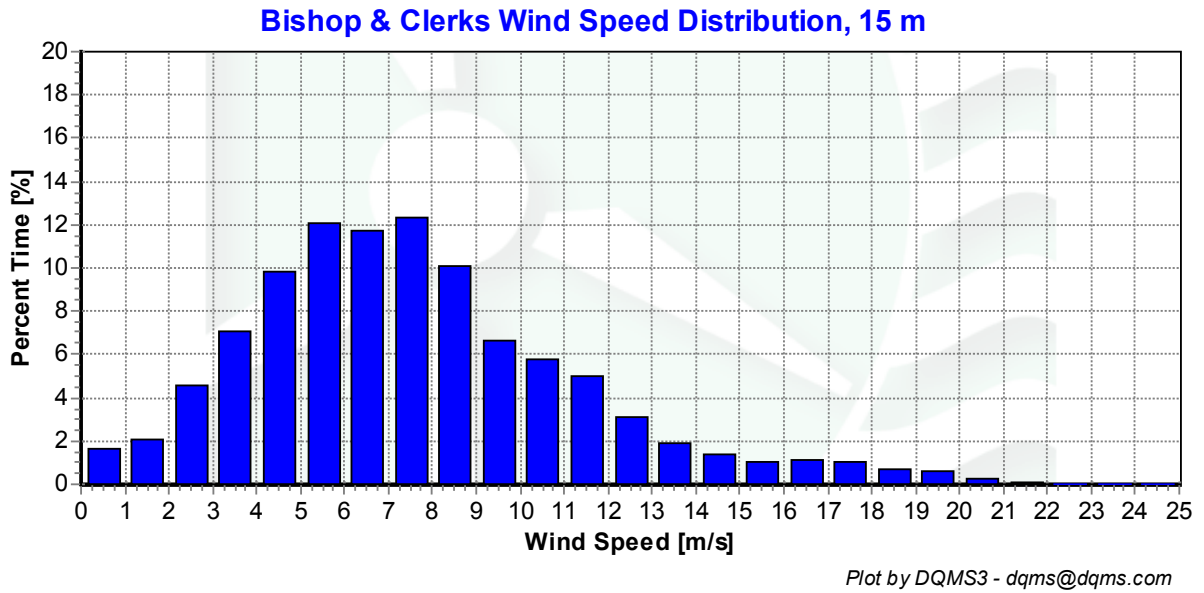


Figure 5 - Wind Speed Distribution, September 2003 – November 2003

Monthly Average Wind Speeds

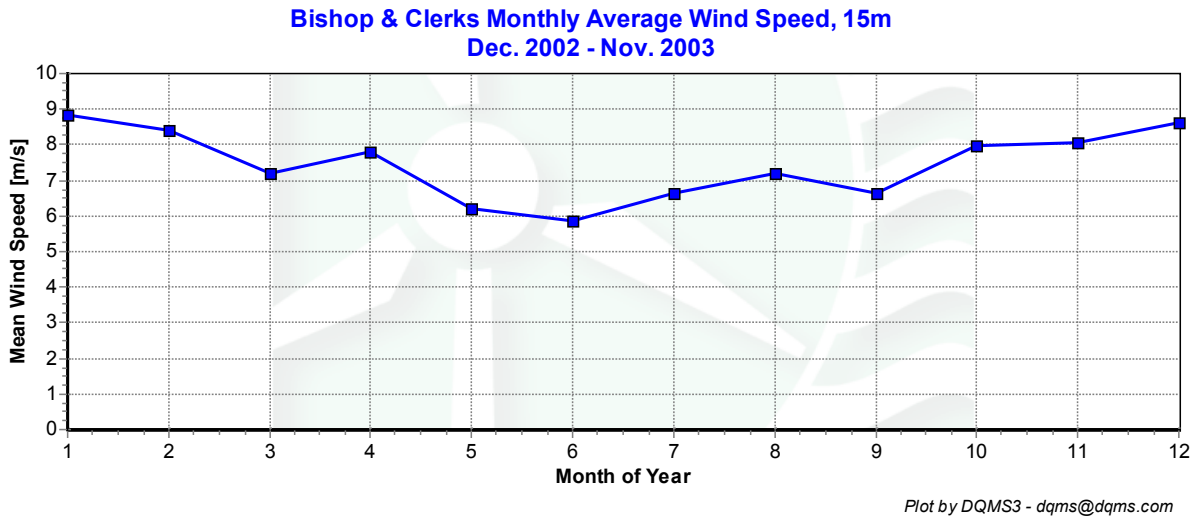


Figure 6 - Monthly average wind speed

Diurnal Average Wind Speeds

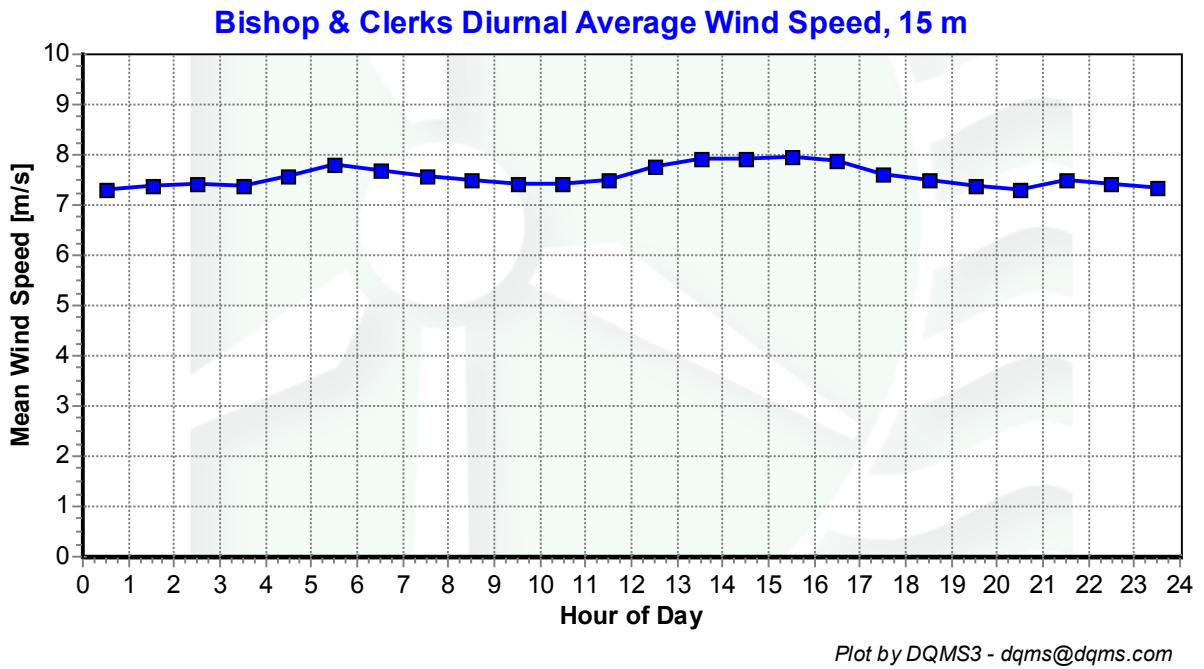


Figure 7 - Diurnal Wind Speed, September 2003 – November 2003

Turbulence Intensities


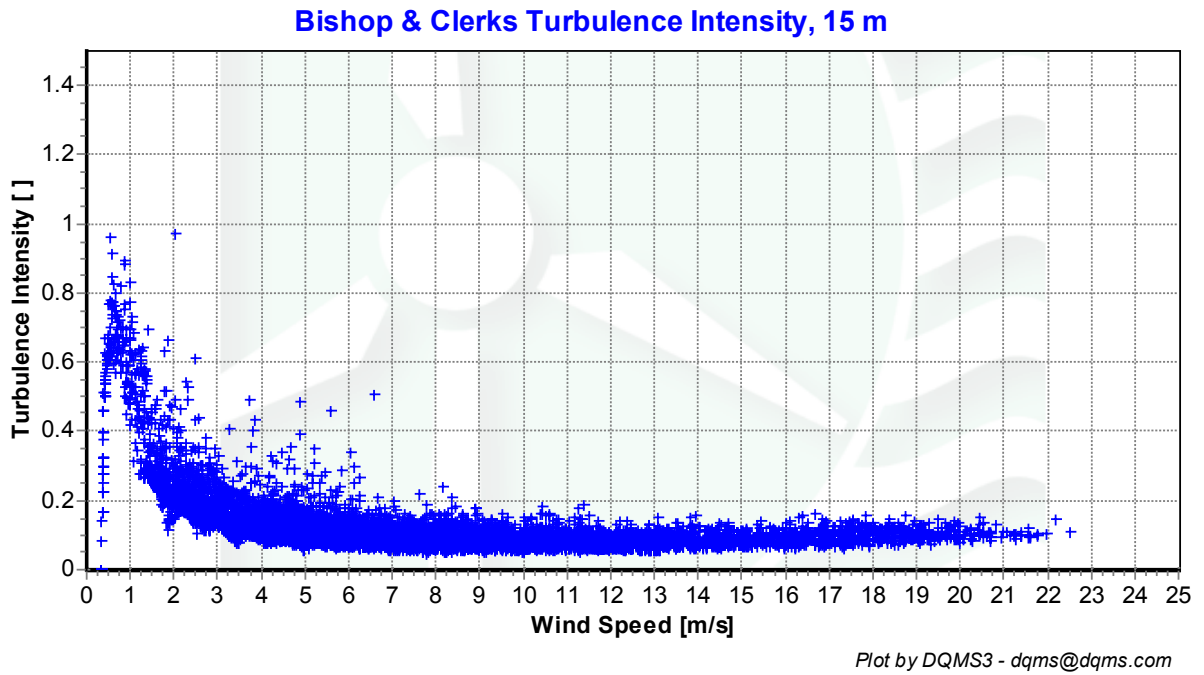


Figure 8 - Turbulence Intensity vs Wind Speed, September 2003 – November 2003

Wind Roses

Bishop & Clerks Wind Rose, 15m

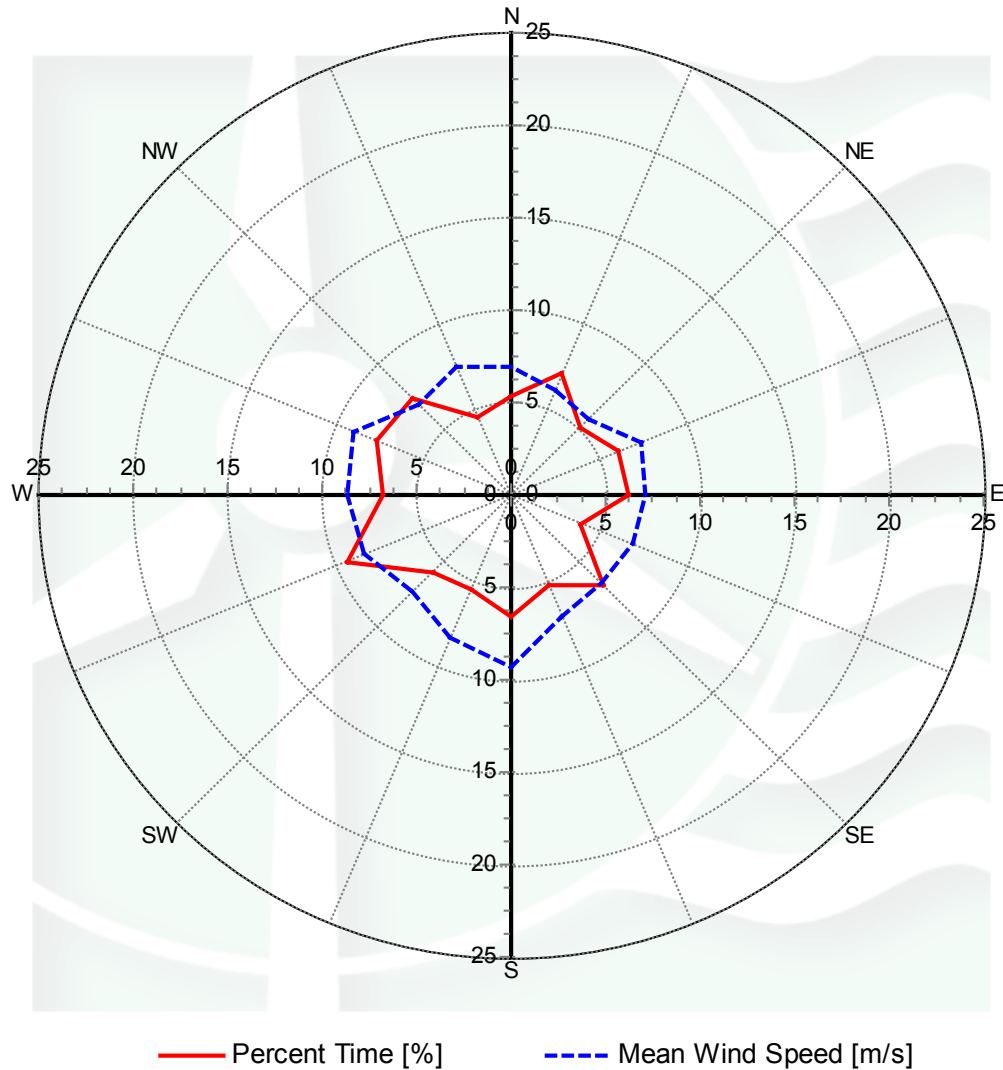

Plot by DQMS3 - dqms@dqms.com

Figure 9 - Wind Rose, September 2003 – November 2003

APPENDIX A - Sensor Performance Report

Test Definitions

Test Order	Test Field1	Test Field2	Test Field3	Calc Field1	Calc Field2	Calc Field3	TestType	Factor 1	Factor 2	Factor 3	Factor 4
1							TimeTest Insert				
3	ltmp13aDEGC						MinMax	-30	60		
4	Batt13aVDC						MinMax	10.5	15		
10	Anem15aMS						MinMax	0	90		
11	Anem15bMS						MinMax	0	90		
12	Anem15yMS						MinMax	0	90		
20	AnemSD15aMS						MinMax	0	4		
21	AnemSD15bMS						MinMax	0	4		
22	AnemSD15yMS						MinMax	0	4		
30	Vane15aDEG						MinMax	0	359.9		
31	Vane15bDEG						MinMax	0	359.9		
32	Vane15yDEG						MinMax	0	359.9		
50	Turb15zNONE						MinMax	0	2		
200	VaneSD15aDEG	Anem15aMS					MinMaxT	0	100	100	10
201	VaneSD15bDEG	Anem15bMS					MinMaxT	0	100	100	10
300	Anem15aMS	AnemSD15aMS	Vane15aDEG	VaneSD15aDEG	ltmp13aDEGC		Icing	0.5	1	2	
301	Anem15bMS	AnemSD15bMS	Vane15bDEG	VaneSD15bDEG	ltmp13aDEGC		Icing	0.5	1	2	
400	Anem15aMS	Anem15bMS					CompareSensors	1	0.25	3	

Sensor Statistics

Sensor	Expected Data Points	Actual Data Points	% Data Recovered	Hours Out of Range	Hours of Icing	Hours of Fault	% Data Good
ltmp13aDEGC	13104	13104	100	0	0	0	100
Batt13aVDC	13104	13104	100	0	0	0	100
Anem15aMS	13104	13104	100	0	0	17.833	99.183
AnemSD15aMS	13104	13104	100	0	0	17.833	99.183
Anem15bMS	13104	13104	100	0	0	23.833	98.909
AnemSD15bMS	13104	13104	100	0	0	23.833	98.909
Vane15aDEG	13104	13104	100	0.333	0	0	99.985
VaneSD15aDEG	13104	13104	100	0.333	0	0	99.985
Vane15bDEG	13104	13104	100	0	0	0	100
VaneSD15bDEG	13104	13104	100	0	0	0	100
Total	131040	131040	100	0.667	0	83.333	99.615

APPENDIX B - Plot Data

Wind Speed Distribution Data

Bin Center Wind Speed [m/s]	Percent of Time [%]
0.5	0.98
1.5	1.43
2.5	3.26
3.5	5.67
4.5	8.29
5.5	11.36
6.5	12.11
7.5	11.97
8.5	11.38
9.5	8.71
10.5	5.59
11.5	5.82
12.5	3.9
13.5	2.4
14.5	1.67
15.5	1.23
16.5	0.98
17.5	1.08
18.5	0.87
19.5	0.72
20.5	0.36
21.5	0.17
22.5	0.06
23.5	0.01
24.5	0

Table 1 - Wind Speed Distribution

Monthly Average Wind Speed Data

Date	10 min Mean [m/s]
2002 Dec	8.64
2003 Jan	8.83
Feb	8.40
Mar	7.20
Apr	7.82
May	6.22
Jun	5.88
Jul	6.65
Aug	7.19
Sept	6.64
Oct	7.98
Nov	8.04

Table 2 - Wind Speed Averages

Diurnal Average Wind Speed Data

Hour of Day	Average Wind Speed [m/s]
0	7.32
1	7.37
2	7.41
3	7.38
4	7.57
5	7.79
6	7.7
7	7.56
8	7.5
9	7.42
10	7.41
11	7.51
12	7.78
13	7.91
14	7.92
15	7.96
16	7.9
17	7.6
18	7.52
19	7.39
20	7.31
21	7.5
22	7.41
23	7.33

Table 3 - Diurnal Average Wind Speeds

Wind Rose Data

Direction	Percent Time [%]	Mean Wind Speed [m/s]
N	5.37	6.89
NNE	7.1	6.13
NE	5.14	5.76
ENE	6.17	7.46
E	6.2	7.14
ESE	4.02	6.96
SE	6.91	6.74
SSE	5.25	7.08
S	6.63	9.36
SSW	5.55	8.3
SW	5.88	7.35
WSW	9.36	8.46
W	6.81	8.72
WNW	7.67	9.01
NW	7.36	6.85
NNW	4.59	7.54

Table 4 - Wind Rose, Time Percentage and Mean Wind Speed by Direction