

WIND DATA REPORT

Orleans

1st March, 2005 – 31st May, 2005

Prepared for

Massachusetts Technology Collaborative
75 North Drive
Westborough, MA 01581

by

Utama Abdulwahid
James F. Manwell
Anthony L. Rogers
Anthony F. Ellis

July 13, 2005

Renewable Energy Research Laboratory
University of Massachusetts, Amherst
160 Governors Drive, Amherst, MA 01003

www.ceere.org/rerl • (413) 545-4359 • rerl@ecs.umass.edu



Notice and Acknowledgements

This report was prepared by the Renewable Energy Research Laboratory (RERL) at the University of Massachusetts, Amherst in the course of performing work sponsored by the Renewable Energy Trust (RET), as administered by the Massachusetts Technology Collaborative (MTC), pursuant to work order number 05-1. The opinions expressed in this report do not necessarily reflect those of MTC or the Commonwealth of Massachusetts, and reference to any specific product, service, process, or method does not constitute an implied or expressed recommendation or endorsement of it.

Further, MTC, the Commonwealth of Massachusetts, and RERL make no warranties or representations, expressed or implied, as to the fitness for particular purpose or merchantability of any product, apparatus, or service, or the usefulness, completeness, or accuracy of any processes, methods or other information contained, described, disclosed, or referred to in this report. MTC, the Commonwealth of Massachusetts, and the contractor make no representation that the use of any product, apparatus, process, method, or other information will not infringe privately owned rights and will assume no liability for any loss, injury, or damage directly or indirectly resulting from, or occurring in connection with, the use of information contained, described, disclosed, or referred to in this report.

Renewable Energy Research Laboratory
University of Massachusetts, Amherst
160 Governors Drive, Amherst, MA 01003

www.ceere.org/rerl • (413) 545-4359 • rerl@ecs.umass.edu



TABLE OF CONTENTS

Table of Contents.....	1
Table of Figures.....	1
Executive Summary.....	2
SECTION 1 - Station Location.....	3
SECTION 2 - Instrumentation and Equipment.....	4
SECTION 3 - Data Collection and Maintenance.....	4
Data Statistics Summary.....	5
SECTION 4 - Significant Meteorological Events.....	5
SECTION 5 - Data Recovery and Validation.....	5
Test Definitions.....	6
Sensor Statistics.....	7
SECTION 6 - Data Summary.....	8
SECTION 7 - Graphs.....	9
Wind Speed Time Series.....	9
Wind Speed Distributions.....	9
Monthly Average Wind Speeds.....	10
Diurnal Average Wind Speeds.....	10
Turbulence Intensities.....	11
Wind Roses.....	11
APPENDIX A - Sensor Performance Report.....	12
Sensor Statistics.....	14
APPENDIX B - Plot Data.....	15
Wind Speed Distribution Data.....	15
Monthly Average Wind Speed Data.....	16
Diurnal Average Wind Speed Data.....	17
Wind Rose Data.....	18

TABLE OF FIGURES

Figure 1 - Site location at Orleans site.....	3
Figure 2 - Wind Speed Time Series, March 2005 - May 2005.....	9
Figure 3 - Wind Speed Distribution, March 2005 - May 2005.....	9
Figure 4 - Monthly average wind speed.....	10
Figure 5 - Diurnal Wind Speed, March 2005 - May 2005.....	10
Figure 6 - Turbulence Intensity vs. Wind Speed, March 2004 - May 2005.....	11
Figure 7 - Wind Rose, March 2005 - May 2005.....	11

EXECUTIVE SUMMARY

All the work presented in this Wind Data Report including installation and decommissioning of the meteorological tower and instrumentation, and the data analysis and reporting was performed by the Renewable Energy Research Laboratory (RERL) at the University of Massachusetts, Amherst.

This wind measurement station is installed at the town watershed in Orleans, MA. Installed on October 27 of 2003, the station has been in continuous operation to this day. The two sets of two anemometers and one wind vane are mounted at 50 m (164.0 ft) and 40 m (131.2 ft), an additional vane and anemometer are mounted at 20 m (65.6 ft).

During the period covered by this report, March 2005 – May 2005, the mean recorded wind speed at 50 m (164.0 ft) was 5.72 m/s (12.8 mph)*; the prevailing wind direction at 40 m (131.2 ft) was NW. The gross data recovery percentage (the actual percentage of expected data received) was 100 % and the net data recovery percentage (the percentage of expected data which passed all of the quality assurance tests) was 87.746%. The net data recovery percentage is low because the 50 m (164.0 ft) wind vane had failed since November 2003.

Additional information about interpreting the data presented in this report can be found in the Fact Sheet, "Interpreting Your Wind Resource Data", produced by RERL and the Massachusetts Technology Collaborative (MTC). This document is found through the RERL website:

http://www.ceere.org/rerl/about_wind/RERL_Fact_Sheet_6_Wind_resource_interpretation.pdf

* 1 m/s = 2.24 mph

SECTION 1 - Station Location

The Orleans site is located on the town watershed in Orleans, MA. The tower is on a cleared hilltop, surrounded by trees. The location of the tower base was measured to be at 41.7584° North, 69.9933° West referred to the NAD83.



Figure 1 - Site location at Orleans site.
Source: www.topozone.com.

SECTION 2 - Instrumentation and Equipment

The wind monitoring equipment is mounted on a 50 m (164.0 ft) Second Wind tower. All the remaining monitoring equipment comes from NRG Systems, and consists of the following items:

- Symphonie Data Logger
- Electrical enclosure box
- 5 – #40 Anemometers, standard calibration (Slope - 0.765 m/s, Offset – 0.350 m/s). Two anemometers are located at 50 m (164.0 ft), two at 40 m and one at a height of 20 m (65.6 ft).
- 3 - #200P Wind direction vanes. They are located at heights of 50, 40 and 20 m (164.0, 131.2 and 65.6 ft) each.
- 5 – Sensor booms, 54” length
- Lightning rod and grounding cable
- Shielded sensor wire

The data from the Symphonie logger is mailed to the University of Massachusetts, Amherst on a regular basis. The logger samples wind speed and direction once every two seconds. These are then combined into 10-minute averages, and along with the standard deviation for those 10-minute periods, are put into a binary file. These binary files are converted to ASCII text files using the NRG software BaseStation®. These text files are then imported into a database software program where they are subjected to QA tests prior to using the data.

SECTION 3 - Data Collection and Maintenance

No measurement of wind speed can be perfectly accurate. Errors occur due to anemometer manufacturing variability, anemometer calibration errors, the response of anemometers to turbulence and vertical air flow and due to air flows caused by the anemometer mounting system. Every effort is made to reduce the sources of these errors. Nevertheless, the values reported in this report have an expected uncertainty of about +/- 2% or +/- 0.2 m/s.

Data Statistics Summary

Date	Mean Wind Speed	Max Wind Speed	Turbulence Intensity	Prevailing Wind Direction	Mean Wind Speed	Max Wind Speed	Turbulence Intensity	Prevailing Wind Direction	Mean Wind Speed	Max Wind Speed
Heights, units	50 m, [m/s]	50 m, [m/s]	50 m, []	40 m, []	40 m, [m/s]	40 m, [m/s]	40 m, []	20 m, []	20 m, [m/s]	20 m, [m/s]
March 2005	6.02	17.6	0.20	WNW	5.47	17.4	0.22	WNW	4.35	13.7
April 2005	5.72	13.9	0.21	SSW	5.25	13.0	0.22	SW	3.95	10.5
May 2005	5.41	15.8	0.22	NW	4.92	14.5	0.25	N	3.64	10.9
Mar 05 – May 05	5.72	17.6	0.21	NW	5.21	17.4	0.23	NW	3.97	13.7

No maintenance on the system was conducted in this quarter.

SECTION 4 - Significant Meteorological Events

The wind speed for this quarter is slightly lower than the normal average. Average temperature is also lower than normal causing icing events to occur up to the middle of April. Source: <http://www.erh.noaa.gov/box/MonthlyClimate2.shtml>.

SECTION 5 - Data Recovery and Validation

All raw wind data are subjected to a series of tests and filters to weed out data that are faulty or corrupted. Definitions of these quality assurance (QA) controls are given below under Test Definitions and Sensor Statistics. These control filters were designed to automate the quality control process and used many of the previous hand-worked data sets made at UMass to affect a suitable emulation. The gross percentage of data recovered (ratio of the number of raw data points received to data points expected) and net data recovered (ratio of raw data points which passed all QA control tests to data points expected) are shown below.

Gross Data Recovered [%]	100.000
Net Data Recovered [%]	87.746

The gross data recovered is low at 87.746% because of the failed 50 m (164.0 ft) wind vane. Disregarding the 50 m (164.0 ft) wind vane data, the gross data recovered is 98.417%.

Test Definitions

All raw data were subjected to a series of validation tests, as described below. The sensors tested and the parameters specific to each sensor are given in the Sensor Performance Report, which is included in APPENDIX A. Data that were flagged as invalid were not included in the statistics presented in this report.

MinMax Test: All sensors are expected to report data values within a range specified by the sensor and logger manufacturers. If a value falls outside this range, it is flagged as invalid. A data value from the sensor listed in Test Field 1 (TF1) is flagged if it is less than Factor 1 (F1) or greater than Factor 2. This test has been applied to the following sensors (as applicable): wind speed, wind speed standard deviation, wind direction, temperature, and solar insolation.

$$F1 > TF1 > F2$$

MinMax T Test: This is a MinMax test for wind direction standard deviation with different ranges applied for high and low wind speeds. A wind direction standard deviation data value (TF1) is flagged either if it is less than Factor 1, if the wind speed (TF2) is less than Factor 4 and the wind direction standard deviation is greater than Factor 2, or if the wind speed is greater than or equal to Factor 4 and the wind direction standard deviation is greater than Factor 3.

$$\begin{aligned} & (TF1 < F1) \\ & \text{or } (TF2 < F4 \text{ and } TF1 > F2) \\ & \text{or } (TF2 \geq F4 \text{ and } TF1 > F3) \end{aligned}$$

Icing Test: An icing event occurs when ice collects on a sensor and degrades its performance. Icing events are characterized by the simultaneous measurements of near-zero standard deviation of wind direction, non-zero wind speed, and near- or below-freezing temperatures. Wind speed, wind speed standard deviation, wind direction, and wind direction standard deviation data values are flagged if the wind direction standard deviation (CF1) is less than or equal to Factor 1 (F1), the wind speed (TF1) is greater than Factor 2 (F2), and the temperature (CF2) is less than Factor 3 (F3). To exit an icing event, the wind direction standard deviation must be greater than Factor 4.

$$CF1 \leq F1 \text{ and } TF1 > F2 \text{ and } CF2 < F3$$

CompareSensors Test: Where primary and redundant sensors are used, it is possible to determine when one of the sensors is not performing properly. For anemometers, poor performance is characterized by low data values. Therefore, if one sensor of the pair reports values significantly below the other, the low values are flagged. At low wind speeds (Test Fields 1 and 2 less than or equal to Factor 3) wind speed data are flagged if the absolute difference between the two wind speeds is greater than Factor 1. At high

wind speeds (Test Fields 1 or 2 greater than Factor 3) wind speed data are flagged if the absolute value of the ratio of the two wind speeds is greater is greater than Factor 2.

$$\begin{aligned} & [TF1 \leq F3 \text{ and } TF2 \leq F3 \text{ and } \text{abs}(TF1 - TF2) > F1] \\ \text{or } & [(TF1 > F3 \text{ or } TF2 > F3) \text{ and } (\text{abs}(1 - TF1 / TF2) > F2 \text{ or } \text{abs}(1 - TF2 / TF1) > F2)] \end{aligned}$$

Sensor Statistics

Expected Data Points: the total number of sample intervals between the start and end dates (inclusive).

Actual Data Points: the total number of data points recorded between the start and end dates.

% Data Recovered: the ratio of actual and expected data points (this is the *gross data recovered percentage*).

Hours Out of Range: total number of hours for which data were flagged according to MinMax and MinMaxT tests. These tests flag data, which fall outside of an expected range.

Hours of Icing: total number of hours for which data were flagged according to Icing tests. This test uses the standard deviation of wind direction, air temperature, and wind speed to determine when sensor icing has occurred. It should be noted that, while this test is tuned to detect sensor icing events, it is possible for the conditions that are representative of icing to occur at other times. The error due to this possibility is considered to be insignificant.

Hours of Fault: total number of hours for which data were flagged according to CompareSensors tests. These tests compare two sensors (e.g. primary and redundant anemometers installed at the same height) and flag data points where one sensor differs significantly from the other.

% Data Good: the filter results are subtracted from the gross data recovery percentage to yield the *net data recovered percentage*.

SECTION 6 - Data Summary

This report contains several types of wind data graphs. Unless otherwise noted, each graph represents data from 1 quarter (3 months). The following graphs are included:

- Time Series – 10-minute average wind speeds are plotted against time in Figure 2. The graph shows two distinct periods when the 10-minute mean wind speed exceed 15 m/s (33 mph).
- Wind Speed Distribution – A histogram plot giving the percentage of time that the wind is at a given wind speed. Figure 3 shows that the maximum percentage is between 4 and 5 m/s (8.76 and 10.95 mph).
- Monthly Average – A plot of the monthly average wind speed over a 18-month period is given in Figure 4. This graph shows the trends in the wind speed from November 2003 - May 2005. Data for the month of May 2004 is missing because the data card arrived at the lab empty.
- Diurnal – A plot of the average wind speed for each hour of the day is given in Figure 5. This graph shows a peak wind speed between 12 PM and 1 PM.
- Turbulence Intensity – A plot of turbulence intensity as a function of wind speed. Turbulence Intensity is calculated as the standard deviation of the wind speed divided by the wind speed and is a measure of the gustiness of a wind resource. Lower turbulence results in lower mechanical loads on a wind turbine. This graph is given in Figure 6.
- Wind Rose – A plot, by compass directions showing the percentage of time that the wind comes from a given direction and the average wind speed in that direction. The spring wind rose, in Figure 7, shows that the wind is predominantly from the NW at the 40 m height and that the mean wind speed is relatively even from all direction with a slight peak from the North. (The 50 m (164.0 ft) wind data was used for the plot but 40 m wind direction data was used due to the failure of the vane at 50m.)

SECTION 7 - Graphs

Data for the wind speed histograms, monthly and diurnal average plots, and wind roses are included in APPENDIX B.

Wind Speed Time Series

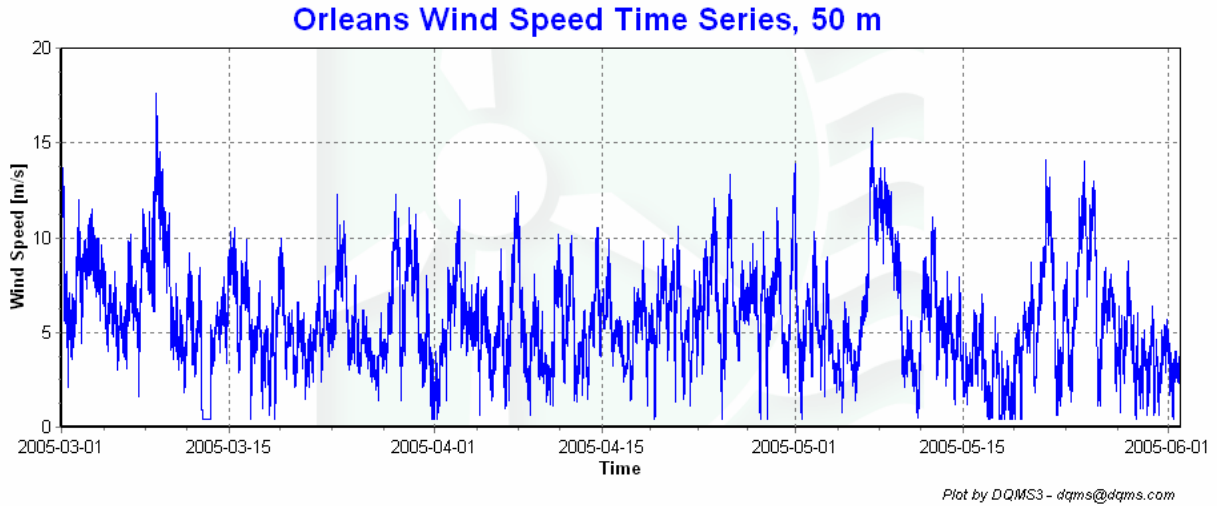


Figure 2 - Wind Speed Time Series, March 2005 - May 2005

Wind Speed Distributions

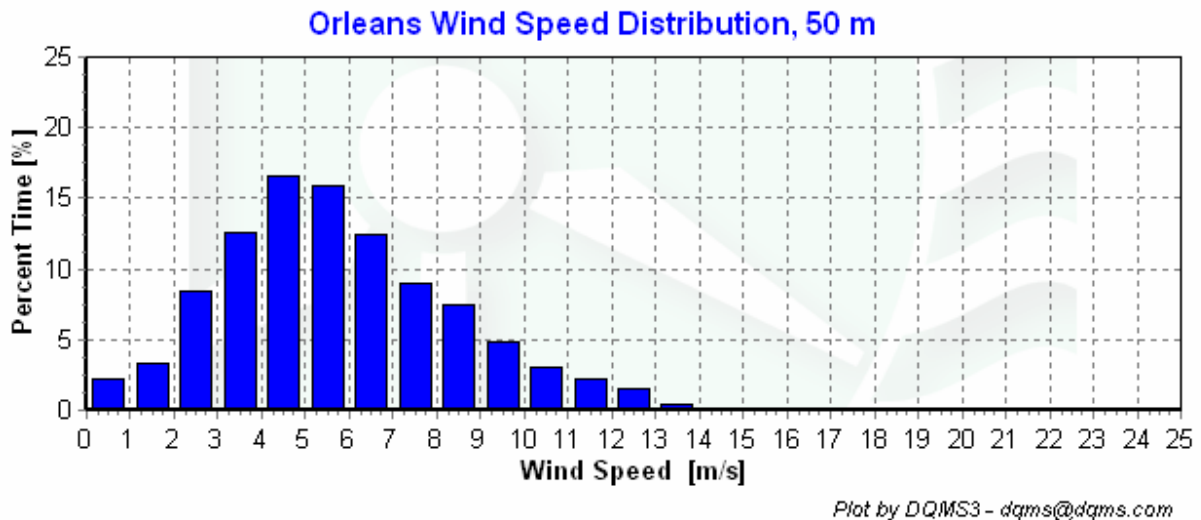


Figure 3 - Wind Speed Distribution, March 2005 - May 2005

Monthly Average Wind Speeds

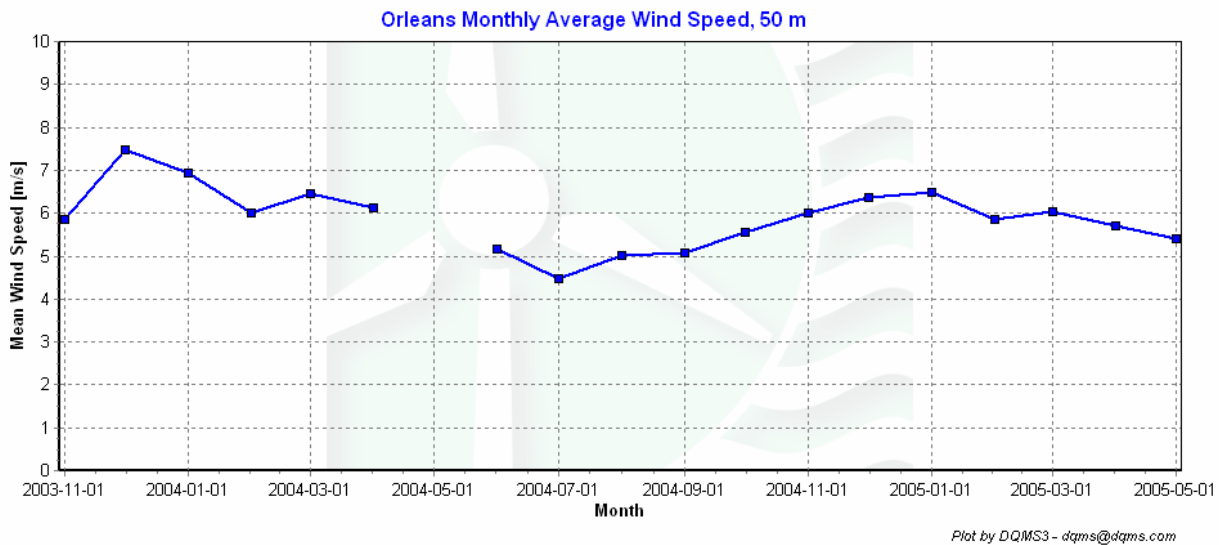


Figure 4 - Monthly average wind speed

Diurnal Average Wind Speeds

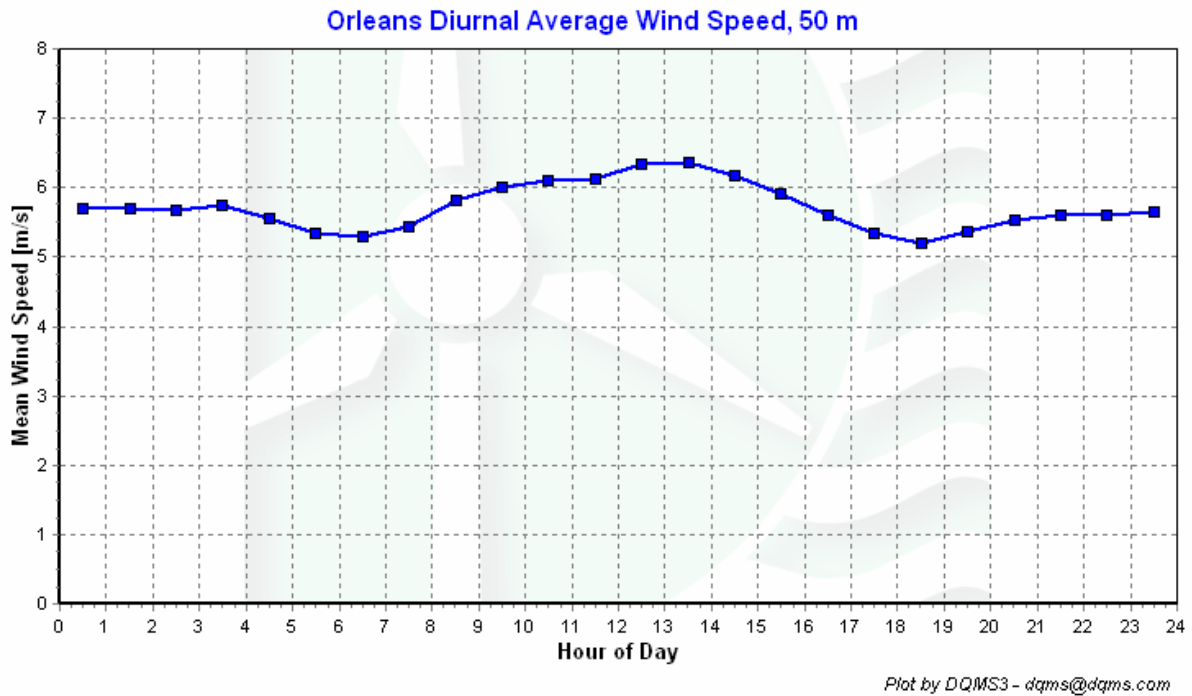


Figure 5 - Diurnal Wind Speed, March 2005 - May 2005

Turbulence Intensities

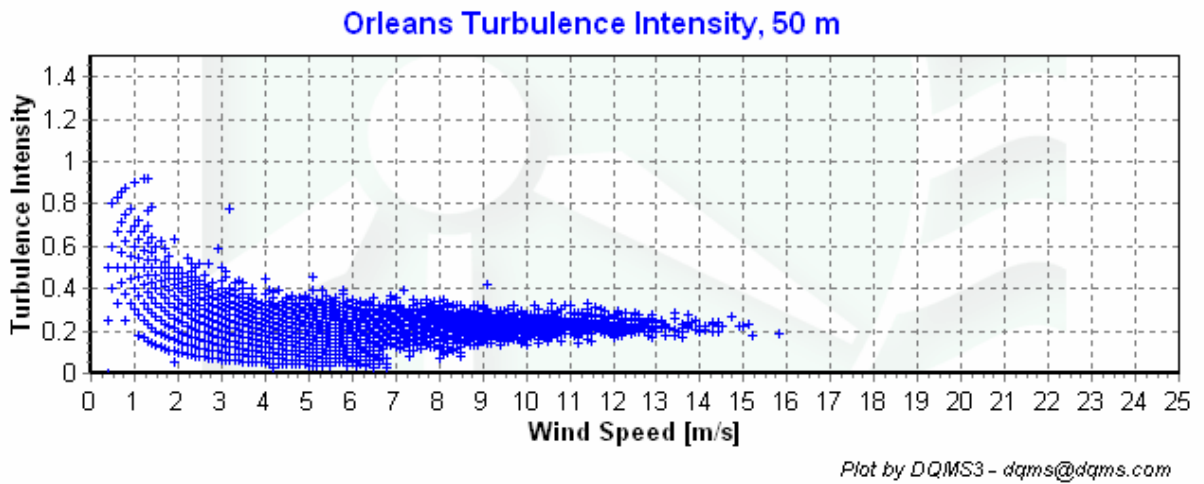


Figure 6 - Turbulence Intensity vs. Wind Speed, March 2004 - May 2005

Wind Roses

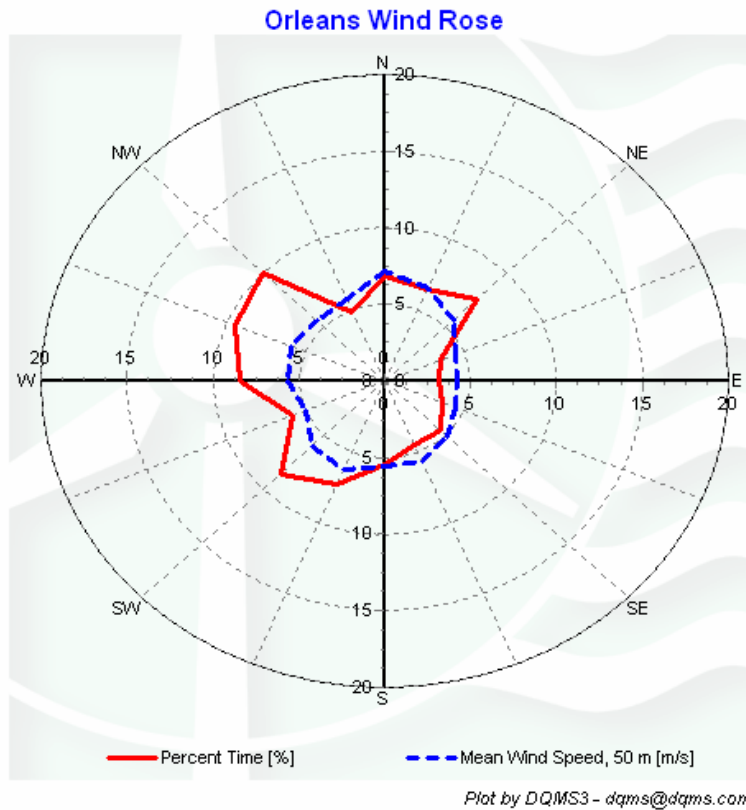


Figure 7 - Wind Rose, March 2005 - May 2005

APPENDIX A - Sensor Performance Report

Test Definitions

TestOrder	TestField1	TestField2	TestField3	CalcField1	CalcField2	TestType	Factor1	Factor2	Factor3	Factor4
1						TimeTest Insert				
2	Etmp2aDEGC					MinMax	-30	60		
3	Etmx2aDEGC					MinMax	-30	60		
4	Etmn2aDEGC					MinMax	-30	60		
5	EtmpSD2aDEGC					MinMax	-30	60		
10	Anem50aMS					MinMax	0	90		
11	Anem50bMS					MinMax	0	90		
12	Anem40aMS					MinMax	0	90		
13	Anem40bMS					MinMax	0	90		
14	Anem20aMS					MinMax	0	90		
15	Anem50yMS					MinMax	0	90		
16	Anem40yMS					MinMax	0	90		
20	AnemSD50aMS					MinMax	0	4		
21	AnemSD50bMS					MinMax	0	4		
22	AnemSD40aMS					MinMax	0	4		
23	AnemSD40bMS					MinMax	0	4		
24	AnemSD20aMS					MinMax	0	4		
25	AnemSD50yMS					MinMax	0	4		
26	AnemSD40yMS					MinMax	0	4		
30	Vane50aDEG					MinMax	0	359.9		
31	Vane40aDEG					MinMax	0	359.9		
32	Vane20aDEG					MinMax	0	359.9		
50	Turb50zNONE					MinMax	0	2		
51	Turb40zNONE					MinMax	0	2		
60	Wshr0zNONE					MinMax	-100	100		
70	Pwr50zWMS					MinMax	0	5000		
71	Pwr40zWMS					MinMax	0	5000		
200	VaneSD50aDEG	Anem50yMS				MinMaxT	0	100	100	10
201	VaneSD40aDEG	Anem40yMS				MinMaxT	0	100	100	10
202	VaneSD20aDEG	Anem20aMS				MinMax	0	100	100	10
300	Anem50aMS	AnemSD50aMS	Vane50aDEG	VaneSD40aDEG	Etmp2aDEGC	Icing	0.5	1	2	10
301	Anem50bMS	AnemSD50bMS	Vane50aDEG	VaneSD40aDEG	Etmp2aDEGC	Icing	0.5	1	2	10

302	Anem40aMS	AnemSD40aMS	Vane40aDEG	VaneSD40aDEG	Etmp2aDEGC	Icing	0.5	1	2	10
303	Anem40bMS	AnemSD40bMS	Vane40aDEG	VaneSD40aDEG	Etmp2aDEGC	Icing	0.5	1	2	10
304	Anem20aMS	AnemSD20aMS	Vane20aDEG	VaneSD20aDEG	Etmp2aDEGC	Icing	0.5	1	2	10
400	Anem50aMS	Anem50bMS				CompareSensors	1	0.25	3	0
401	Anem40aMS	Anem40bMS			CompareSensors	1	0.25	3	0	401
500	Amax50aMS					MinMax	0	90		
501	Amax50bMS					MinMax	0	90		
502	Amax40aMS					MinMax	0	90		
503	Amax40bMS					MinMax	0	90		
504	Amax20aMS					MinMax	0	90		
510	Amin50aMS					MinMax	0	90		
511	Amin50bMS					MinMax	0	90		
512	Amin40aMS					MinMax	0	90		
513	Amin40bMS					MinMax	0	90		
514	Amin20aMS					MinMax	0	90		
520	Vmax50aDEG					MinMax	0	359.9		
521	Vmax40aDEG					MinMax	0	359.9		
522	Vmax20aDEG					MinMax	0	359.9		
530	Vmin50aDEG					MinMax	0	359.9		
531	Vmin40aDEG					MinMax	0	359.9		
532	Vmin20aDEG					MinMax	0	359.9		

Sensor Statistics

Sensor	Expected Data Points	Actual Data Points	% Data Recovered	Hours Out of Range	Hours of Icing	Hours of Fault	% Data Good
Anem50aMS	13248	13248	100	0	60.5	0	97.26
AnemSD50aMS	13248	13248	100	0	60.5	0	97.26
Amax50aMS	13248	13248	100	0	0	0	100
Amin50aMS	13248	13248	100	0	0	0	100
Anem50bMS	13248	13248	100	0	58.333	1.333	97.298
AnemSD50bMS	13248	13248	100	0	58.333	1.333	97.298
Amax50bMS	13248	13248	100	0	0	0	100
Amin50bMS	13248	13248	100	0	0	0	100
Anem40aMS	13248	13248	100	0	60.5	4.667	97.049
AnemSD40aMS	13248	13248	100	0	60.5	4.667	97.049
Amax40aMS	13248	13248	100	0	0	0	100
Amin40aMS	13248	13248	100	0	0	0	100
Anem40bMS	13248	13248	100	0.167	60.5	10.5	96.777
AnemSD40bMS	13248	13248	100	0.167	60.5	10.5	96.777
Amax40bMS	13248	13248	100	0	0	0	100
Amin40bMS	13248	13248	100	0	0	0	100
Anem20aMS	13248	13248	100	0	68.333	0	96.905
AnemSD20aMS	13248	13248	100	0.333	68.333	0	96.89
Amax20aMS	13248	13248	100	0	0	0	100
Amin20aMS	13248	13248	100	0	0	0	100
Vane50aDEG	13248	13248	100	0	0	2208	0
VaneSD50aDEG	13248	13248	100	0	0	2208	0
Vmax50aDEG	13248	13248	100	0	0	2208	0
Vmin50aDEG	13248	13248	100	0	0	2208	0
Vane40aDEG	13248	13248	100	0.333	60.5	0	97.245
VaneSD40aDEG	13248	13248	100	0.333	60.5	0	97.245
Vmax40aDEG	13248	13248	100	0	0	0	100
Vmin40aDEG	13248	13248	100	0	0	0	100
Vane20aDEG	13248	13248	100	0	68.333	0	96.905
VaneSD20aDEG	13248	13248	100	0.333	68.333	0	96.89
Vmax20aDEG	13248	13248	100	0	0	0	100
Vmin20aDEG	13248	13248	100	0	0	0	100
Etmp2aDEGC	13248	13248	100	0	0	0	100
EtmpSD2aDEGC	13248	13248	100	0	0	0	100
Etmx2aDEGC	13248	13248	100	0	0	0	100
Etmn2aDEGC	13248	13248	100	0	0	0	100
Total	476928	476928	100	1.667	874	8865	87.746

APPENDIX B - Plot Data

Wind Speed Distribution Data

Bin Center Wind Speed [m/s]	Percent of Time [%]
0.5	1.17
1.5	2.14
2.5	5.22
3.5	10.89
4.5	15.07
5.5	15.77
6.5	13.65
7.5	12.07
8.5	9.53
9.5	5.75
10.5	3.15
11.5	2.14
12.5	1.64
13.5	0.85
14.5	0.36
15.5	0.13
16.5	0.25
17.5	0.12
18.5	0.09
19.5	0.02
20.5	0
21.5	0
22.5	0
23.5	0
24.5	0

Table 1 - Wind Speed Distribution, March 2005- May 2005

Monthly Average Wind Speed Data

Date	10 min Mean [m/s]
November 2003	5.84
December 2003	7.47
January 2004	6.95
February 2004	6.02
March 2004	6.46
April 2004	6.12
May 2004	
June 2004	5.15
July 2004	4.48
August 2004	5.01
September 2004	5.08
October 2004	5.58
November 2004	6.00
December 2004	6.37
January 2005	6.47
February 2005	5.86
March 2005	6.02
April 2005	5.72
May 2005	5.41

Table 2 - Wind Speed Averages

Diurnal Average Wind Speed Data

Hour of Day	Average Wind Speed [m/s]
0	5.7
1	5.69
2	5.67
3	5.74
4	5.55
5	5.33
6	5.29
7	5.43
8	5.81
9	6
10	6.11
11	6.13
12	6.34
13	6.37
14	6.18
15	5.92
16	5.6
17	5.35
18	5.2
19	5.37
20	5.54
21	5.59
22	5.61
23	5.65

Table 3 - Diurnal Average Wind Speeds, March 2005- May 2005

Wind Rose Data

Direction	Percent Time [%], 40 m	Mean Wind Speed [m/s], 50 m
N	6.89	2.14
NNE	6.43	3.31
NE	7.54	8.38
ENE	3.51	12.51
E	3.12	16.61
ESE	3.64	15.92
SE	4.59	12.42
SSE	4.47	8.97
S	5.46	7.44
SSW	7.31	4.89
SW	8.55	3.03
WSW	5.76	2.15
W	8.44	1.46
WNW	9.38	0.42
NW	10.01	0.19
NNW	4.89	0.11

**Table 4 - Wind Rose, Time Percentage and Mean Wind Speed by Direction,
March 2005 - May 2005**