

WIND DATA REPORT

Barnstable, MA

April 1, 2005 – March 31, 2006

Prepared for

Massachusetts Technology Collaborative
75 North Drive
Westborough, MA 01581

by

Kai Wu
James F. Manwell
Anthony L. Rogers
Anthony F. Ellis

July 19, 2006

Renewable Energy Research Laboratory
University of Massachusetts, Amherst
160 Governors Drive, Amherst, MA 01003

www.ceere.org/rerl • (413) 545-4359 • rerl@ecs.umass.edu



NOTICE AND ACKNOWLEDGEMENTS

This report was prepared by the Renewable Energy Research Laboratory (RERL) at the University of Massachusetts, Amherst in the course of performing work sponsored by the Renewable Energy Trust (RET), as administered by the Massachusetts Technology Collaborative (MTC), pursuant to work order number 05-1. The opinions expressed in this report do not necessarily reflect those of MTC or the Commonwealth of Massachusetts, and reference to any specific product, service, process, or method does not constitute an implied or expressed recommendation or endorsement of it.

Further, MTC, the Commonwealth of Massachusetts, and RERL make no warranties or representations, expressed or implied, as to the fitness for particular purpose or merchantability of any product, apparatus, or service, or the usefulness, completeness, or accuracy of any processes, methods or other information contained, described, disclosed, or referred to in this report. MTC, the Commonwealth of Massachusetts, and the contractor make no representation that the use of any product, apparatus, process, method, or other information will not infringe privately owned rights and will assume no liability for any loss, injury, or damage directly or indirectly resulting from, or occurring in connection with, the use of information contained, described, disclosed, or referred to in this report.

TABLE OF CONTENTS

Notice and Acknowledgements	1
Table of Contents	2
Table of Figures	3
Executive Summary	4
SECTION 1 - Station Location	5
SECTION 2 - Instrumentation and Equipment	6
SECTION 3 - Data Collection and Maintenance	6
SECTION 4 - Significant Meteorological Events	8
SECTION 5 - Data Recovery and Validation	8
Test Definitions	8
Sensor Statistics	10
SECTION 6 - Data Summary	10
SECTION 7 - Graphs	11
Wind Speed Time Series	11
Wind Speed Distributions	12
Monthly Average Wind Speeds	12
Diurnal Average Wind Speeds	13
Turbulence Intensities	13
Wind Roses	14
APPENDIX A - Sensor Performance Report	15
Test Definitions	15
Sensor Statistics	16
APPENDIX B - Plot Data	17
Wind Speed Distribution Data	17
Monthly Average Wind Speed Data	18
Diurnal Average Wind Speed Data	18
Wind Rose Data	19

TABLE OF FIGURES

Figure 1 – Map of Barnstable wind tower site.....	5
Figure 2 – Barnstable wind speed time series, April 1, 2005 – March 31, 2006.....	11
Figure 3 – Barnstable wind speed distribution, April 1, 2005 – March 31, 2006.....	12
Figure 4 – Barnstable monthly average wind speed, April 2005 – March 2006	12
Figure 5 – Barnstable diurnal average wind speed, April 1, 2005 – March 31, 2006	13
Figure 6 – Barnstable turbulence intensity, April 1, 2005 – March 31, 2006	13
Figure 7 – Barnstable wind rose, April 1, 2005 – March 31, 2006	14

EXECUTIVE SUMMARY

All the work presented in this Wind Data Report including installation and decommissioning of the meteorological tower and instrumentation, and the data analysis and reporting was performed by the Renewable Energy Research Laboratory (RERL) at the University of Massachusetts, Amherst.

Wind monitoring equipment was first installed in Barnstable, MA in late March 2005, with data collection starting from the 30th of that month through April 28, 2006. Five anemometers, three vanes, a temperature sensor, and a data logger are mounted on a 40 m monitoring tower.

Data collection percentages during the twelve month period of April 2005 through March 2006 were excellent: the raw data recovery rate was 100%, and after quality assurance the percentage of good data was 99.98%. The average wind speed during the twelve months was 5.28 m/s at 39 m height (11.81 mph at 128 ft.)*. Turbulence intensity for this time period was an average of 0.2. The prevailing wind was from the West overall.

Additional information about interpreting the data presented in this report can be found in the Fact Sheet, "Interpreting Your Wind Resource Data", produced by RERL and the Massachusetts Technology Collaborative (MTC). This document is found through the RERL website:

http://www.ceere.org/rerl/about_wind/RERL_Fact_Sheet_6_Wind_resource_interpretation.pdf

* 1 m/s = 2.237 mph

SECTION 1 - Station Location

The monitoring tower is located on a plateau adjacent to the town's wastewater treatment plant (WWTP), on the corner of Route 28 and Bearses Way. The wind monitoring tower is mounted on a 40 m NRG tubular steel tower, anchored with guy lines at four directions. Site coordinates are 41° 39.885' North, 70° 18.270' West per the WSG84 standard (the World Geodetic System 1984, an international standard for absolute localization with earthly coordinates). See the figure below for a map of the tower location, which is at the map center (at the first letter "S" in the label "Sewage Disposal").

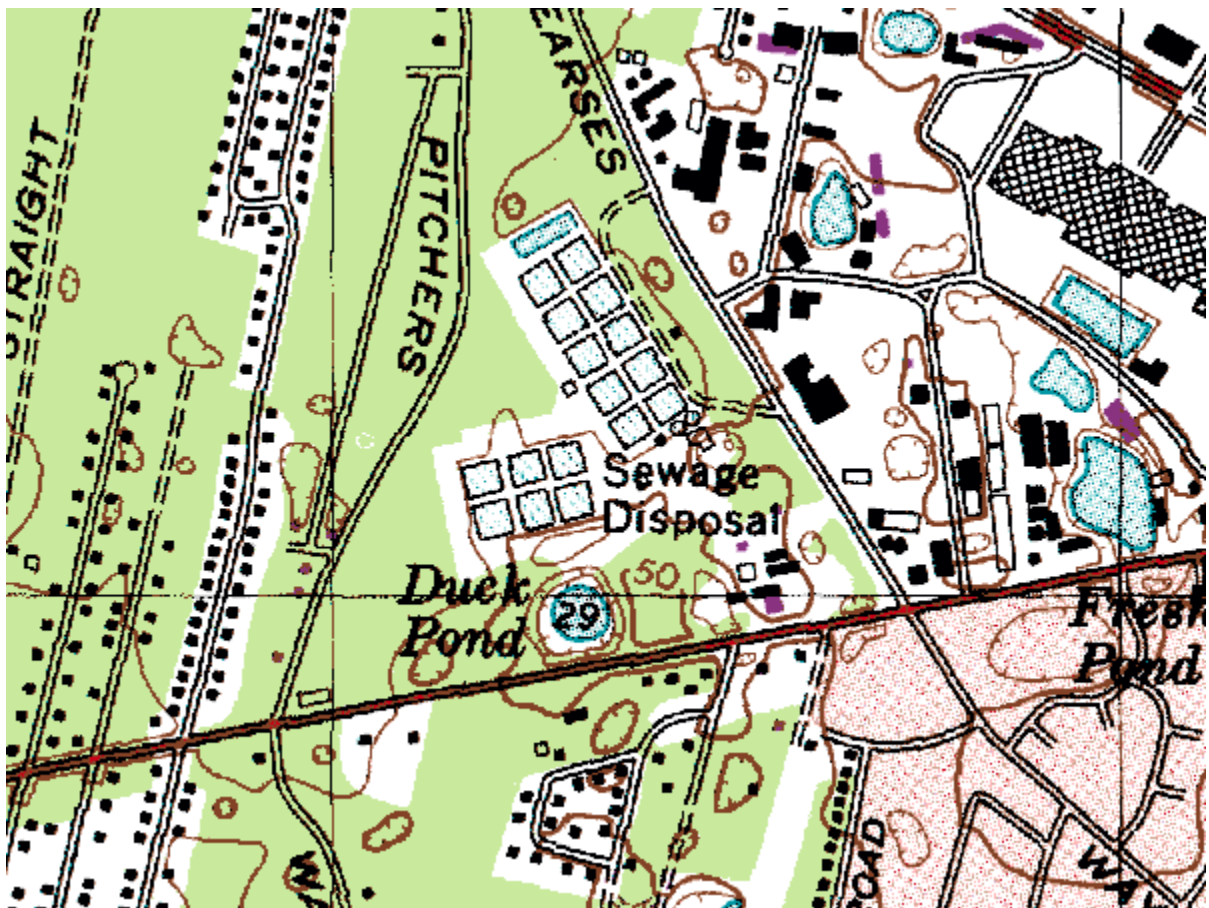


Figure 1 – Map of Barnstable wind tower site

SECTION 2 - Instrumentation and Equipment

An alternating-color, red and white 40 m NRG tower holds five NRG anemometers on three booms: one at 10 m, two at 30 m, and two at 39 m. Each anemometer is 54" away from the tower, and 18" above its boom. Also on a separate boom is an NRG 200P Wind Vane. In addition, an FAA-compliant red hazard light is mounted on the tower top.

The installed equipment comprises:

- Symphonie data logger
- NRG 110S Temperature Sensor
- Five #40 anemometers, standard calibration (slope 0.765 m/s, offset 0.350 m/s)
- Three #200P wind direction vanes
- Medium booms for vanes, 39" from tower mast
- Long side booms for anemometers, 54" from tower mast
- Lightning rod and grounding cable
- FAA hazard light

SECTION 3 - Data Collection and Maintenance

During the period of April 1, 2005 through March 31, 2006, no maintenance events occurred. Data collection during this period was excellent, with results summarized below:

Date	39m Mean 10 min	39m Max	30m Mean 10 min	30m Max	10m Mean 10 min	10m Max	39m Turbulence Intensity	39m Prevailing Wind Direction	30m Turbulence Intensity	30m Prevailing Wind Direction	Wind shear coefficient
	[m/s]	[m/s]	[m/s]	[m/s]	[m/s]	[m/s]	[]	[]	[]	[]	[]
2005 April	5.68	13.2	5.25	12.6	3.87	10.7	0.2	202.5	0.21	225	0.34
May	5.72	19.1	5.41	17.9	4.19	15	0.21	360	0.22	360	0.28
June	5	11.5	4.7	11	3.72	9.4	0.2	225	0.21	225	0.24
July	4.55	13.7	4.21	12.8	3.13	10.2	0.21	225	0.22	225	0.32
August	4.46	11.1	4.1	10.1	2.91	8	0.19	225	0.21	225	0.37
September	4.64	12.5	4.26	11.9	3.02	9.9	0.2	225	0.21	202.5	0.41
October	5.64	16.7	5.19	15.6	3.66	10.8	0.21	360	0.22	270	0.38
November	5.33	14.4	4.82	13.6	3.37	10.9	0.19	225	0.21	225	0.41
December	5.22	20.7	4.75	18.6	3.46	14.9	0.19	270	0.21	270	0.39
2006 January	5.91	15.9	5.42	14.9	4	11.9	0.2	315	0.21	225	0.36
February	5.94	18.3	5.45	17.7	4.11	15.4	0.2	292.5	0.21	292.5	0.36
March	5.23	12.7	4.82	11.7	3.7	9.6	0.2	315	0.21	315	0.31
April 05 – March 06	5.28	20.7	4.87	18.6	3.6	15.4	0.2	270, W	0.21	225, SW	0.35

Data Statistics Summary

Wind data statistics in the table are reported when more than 90% of the data during the reporting period are valid. In cases when a larger amount of data are missing, the percent of the available data that are used to determine the data statistics is noted.

No measurement of wind speed can be perfectly accurate. Errors occur due to anemometer manufacturing variability, anemometer calibration errors, the response of anemometers to turbulence and vertical air flow and due to air flows caused by the anemometer mounting system. Every effort is made to reduce the sources of these errors. Nevertheless, the values reported in this report have an expected uncertainty of about $\pm 2\%$ or ± 0.2 m/s, whichever is greater.

When data at multiple heights are available, shear coefficients, α , have been determined. They can be used in the following formula to estimate the average wind speed, $U(z)$, at height z , when the average wind speed, $U(z_r)$, at height z_r is known:

$$U(z)=U(z_r)\left(\frac{z}{z_r}\right)^\alpha$$

The change in wind speed with height is a very complicated relationship related to atmospheric conditions, wind speed, wind direction, time of day and time of year. This formula may not provide the correct answer at any given site. Nevertheless the calculated shear coefficient, based on measurements at two heights, can be used to characterize the degree of increase in wind speed with height at a site.

SECTION 4- Significant Meteorological Events

The months of April 2005 through March 2006 were unremarkable meteorologically. There were no major wind events shown in the wind speed time series. For further information see:

<http://www.erh.noaa.gov/box/MonthlyClimate2.shtml>

SECTION 5 - Data Recovery and Validation

All raw wind data are subjected to a series of tests and filters to weed out data that are faulty or corrupted. Definitions of these quality assurance (QA) controls are given below under Test Definitions and Sensor Statistics. These control filters were designed to automate the quality control process and used many of the previous hand-worked data sets made at UMass to affect a suitable emulation. The gross percentage of data recovered (ratio of the number of raw data points received to data points expected) and net percentage (ratio of raw data points which passed all QA control tests to data points expected) are shown below.

Gross Data Recovered [%]	100.00
Net Data Recovered [%]	99.98

Test Definitions

All raw data were subjected to a series of validation tests, as described below. The sensors tested and the parameters specific to each sensor are given in the Sensor Performance Report which is included in APPENDIX A. Data which were flagged as invalid were not included in the statistics presented in this report.

MinMax Test: All sensors are expected to report data values within a range specified by the sensor and logger manufacturers. If a value falls outside this range, it is flagged as invalid. A data value from the sensor listed in Test Field 1 (TF1) is flagged if it is less than Factor 1 (F1) or greater than Factor 2. This test has been applied to the following sensors (as applicable): wind speed, wind speed standard deviation, wind direction, temperature, and solar insolation.

$$F1 > TF1 > F2$$

MinMaxT Test: This is a MinMax test for wind direction standard deviation with different ranges applied for high and low wind speeds. A wind direction standard deviation data value (TF1) is flagged either if it is less than Factor 1, if the wind speed (TF2) is less than Factor 4 and the wind direction standard deviation is greater than Factor 2, or if the wind speed is greater than or equal to Factor 4 and the wind direction standard deviation is greater than Factor 3.

$$\begin{aligned} & (TF1 < F1) \\ & \text{or } (TF2 < F4 \text{ and } TF1 > F2) \\ & \text{or } (TF2 \geq F4 \text{ and } TF1 > F3) \end{aligned}$$

Icing Test: An icing event occurs when ice collects on a sensor and degrades its performance. Icing events are characterized by the simultaneous measurements of near-zero standard deviation of wind direction, non-zero wind speed, and near- or below-freezing temperatures. Wind speed, wind speed standard deviation, wind direction, and wind direction standard deviation data values are flagged if the wind direction standard deviation (CF1) is less than or equal to Factor 1 (F1), the wind speed (TF1) is greater than Factor 2 (F2), and the temperature (CF2) is less than Factor 3 (F3). To exit an icing event, the wind direction standard deviation must be greater than Factor 4.

$$CF1 \leq F1 \text{ and } TF1 > F2 \text{ and } CF2 < F3$$

CompareSensors Test: Where primary and redundant sensors are used, it is possible to determine when one of the sensors is not performing properly. For anemometers, poor performance is characterized by low data values. Therefore, if one sensor of the pair reports values significantly below the other, the low values are flagged. At low wind speeds (Test Fields 1 and 2 less than or equal to Factor 3) wind speed data are flagged if the absolute difference between the two wind speeds is greater than Factor 1. At high wind speeds (Test Fields 1 or 2 greater than Factor 3) wind speed data are flagged if the absolute value of the ratio of the two wind speeds is greater is greater than Factor 2.

$$\begin{aligned} & [TF1 \leq F3 \text{ and } TF2 \leq F3 \text{ and } \text{abs}(TF1 - TF2) > F1] \\ & \text{or } [(TF1 > F3 \text{ or } TF2 > F3) \text{ and } (\text{abs}(1 - TF1 / TF2) > F2 \text{ or } \text{abs}(1 - TF2 / TF1) > F2)] \end{aligned}$$

Sensor Statistics

Expected Data Points: the total number of sample intervals between the start and end dates (inclusive).

Actual Data Points: the total number of data points recorded between the start and end dates.

% Data Recovered: the ratio of actual and expected data points (this is the *gross data recovered percentage*).

Hours Out of Range: total number of hours for which data were flagged according to MinMax and MinMaxT tests. These tests flag data which fall outside of an expected range.

Hours of Icing: total number of hours for which data were flagged according to Icing tests. This test uses the standard deviation of wind direction, air temperature, and wind speed to determine when sensor icing has occurred.

Hours of Fault: total number of hours for which data were flagged according to CompareSensors tests. These tests compare two sensors (e.g. primary and redundant anemometers installed at the same height) and flag data points where one sensor differs significantly from the other.

% Data Good: the filter results are subtracted from the gross data recovery percentage to yield the *net data recovered percentage*.

SECTION 6 - Data Summary

This report contains several types of wind data graphs. Unless otherwise noted, each graph represents data from 1 year (12 months) at the topmost sensor height, 39m. The following graphs are included:

- Time Series – 10-minute average wind speeds are plotted against time, Figure 2. We can see that the wind speeds exhibit an average around 5 m/s, and generally do not exceed 10 m/s.
- Wind Speed Distribution – A histogram plot giving the percentage of time that the wind is at a given wind speed, Figure 3. We can see that the wind speed is between 4 and 5 m/s most frequently.
- Monthly Average – A plot of the monthly average wind speed, over a 12-month period, Figure 4. This graph shows the trends in the wind speed over the year.

Twelve months, April 2005 through March 2006 inclusive, are shown. A seasonal decline of wind speed during the summer is evident.

- Diurnal – A plot of the average wind speed for each hour of the day, Figure 5. The plot clearly shows wind speed rising during daylight hours.
- Turbulence Intensity – A plot of turbulence intensity as a function of wind speed, Figure 6. Turbulence Intensity is calculated as the standard deviation of the wind speed divided by the wind speed and is a measure of the gustiness of a wind resource. Lower turbulence results in lower mechanical loads on a wind turbine. Below, we can see the turbulence values clustering around 0.2.
- Wind Rose – A plot, by compass direction showing the percentage of time that the wind comes from a given direction and the average wind speed in that direction, Figure 7. The winter season showed a clear bias from the West and Southwest directions.

SECTION 7 - Graphs

Data for the wind speed histograms, monthly and diurnal average plots, and wind roses are included in APPENDIX B.

Wind Speed Time Series


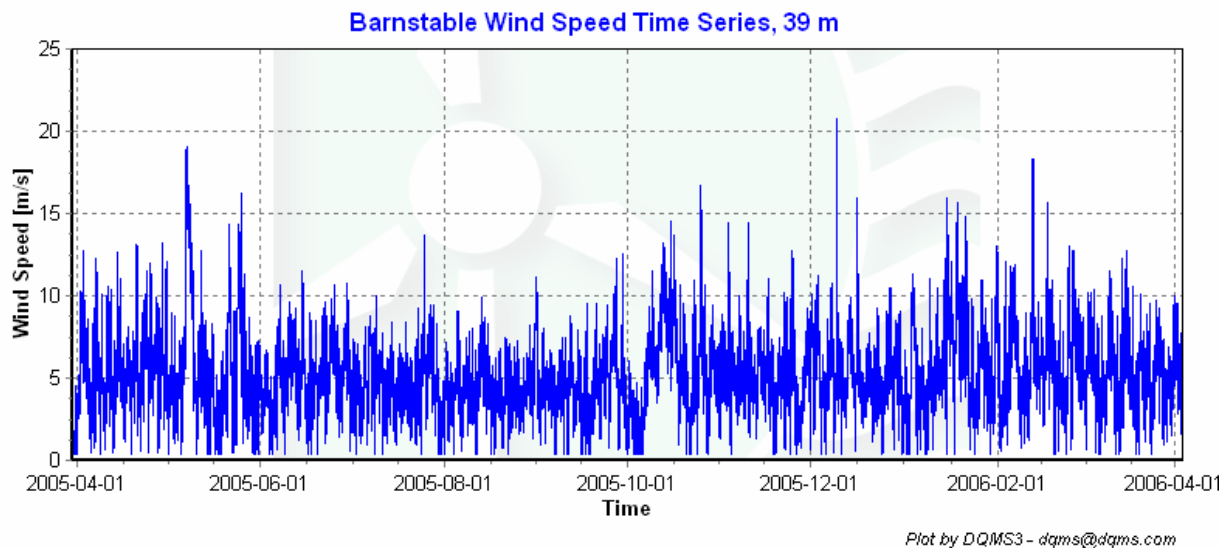


Figure 2 – Barnstable wind speed time series, April 1, 2005 – March 31, 2006


Wind Speed Distributions

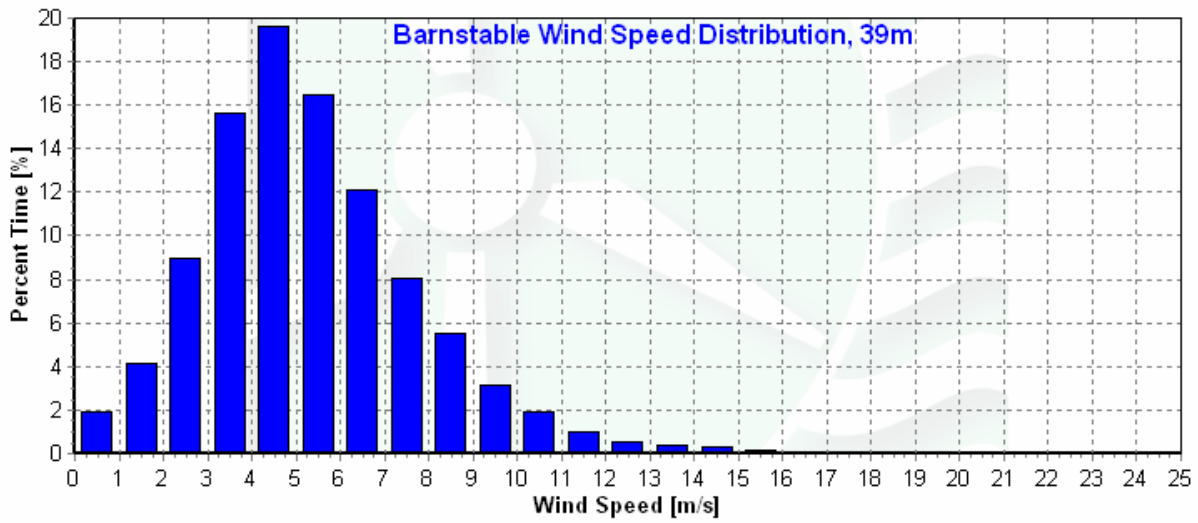

Plot by DQMS3 - dqms@dqms.com

Figure 3 – Barnstable wind speed distribution, April 1, 2005 – March 31, 2006

Monthly Average Wind Speeds

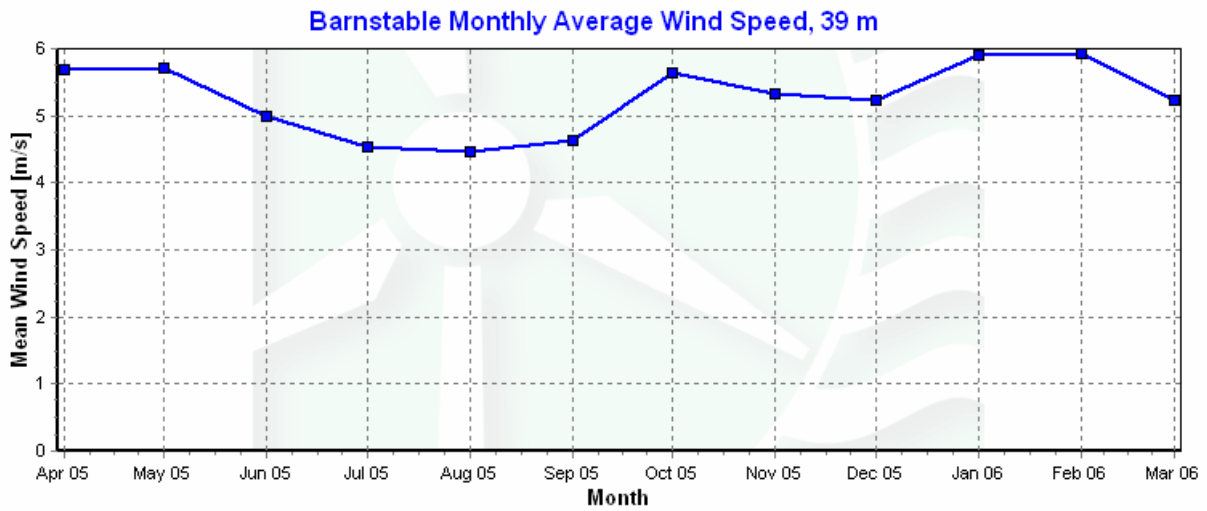

Plot by DQMS3 - dqms@dqms.com

Figure 4 – Barnstable monthly average wind speed, April 2005 – March 2006

Diurnal Average Wind Speeds

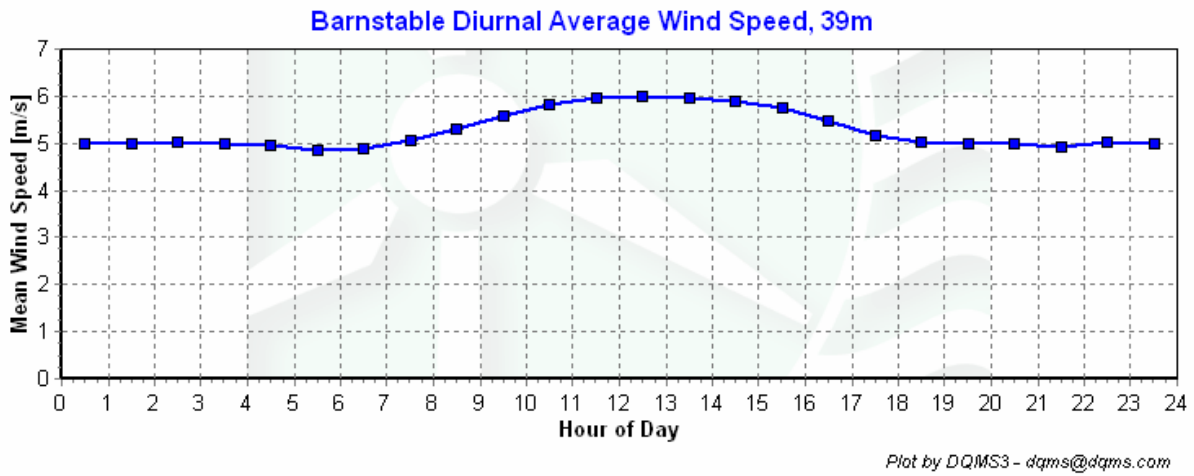


Figure 5 – Barnstable diurnal average wind speed, April 1, 2005 – March 31, 2006

Turbulence Intensities


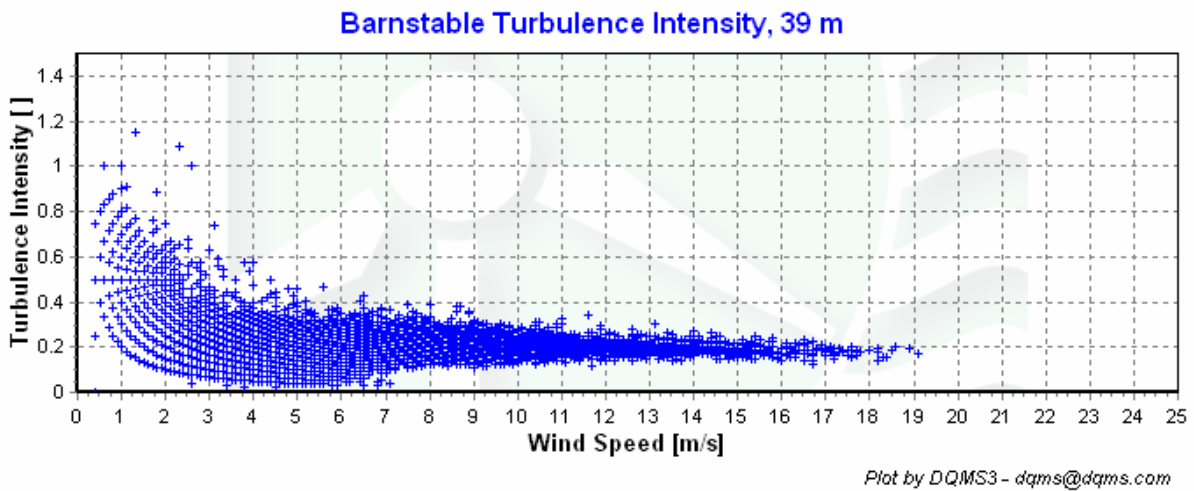


Figure 6 – Barnstable turbulence intensity, April 1, 2005 – March 31, 2006

Wind Roses

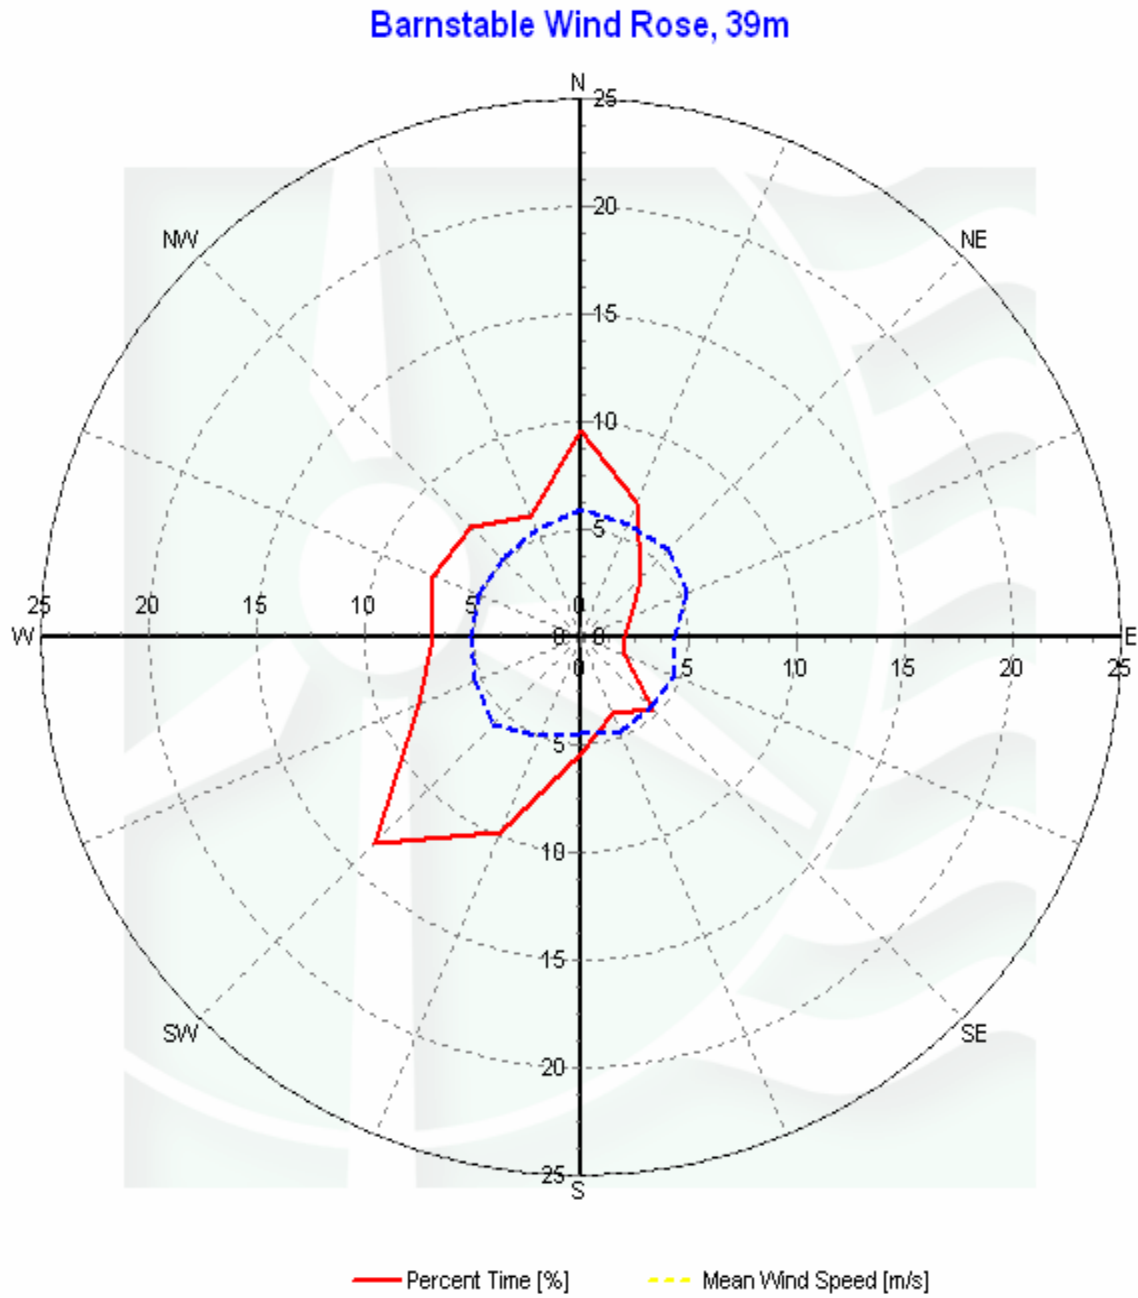

Plot by DQMS3 - dqms@dqms.com

Figure 7 – Barnstable wind rose, April 1, 2005 – March 31, 2006

APPENDIX A - Sensor Performance Report

Test Definitions

Test Order	TestField1	TestField2	TestField3	CalcField1	CalcField2	TestType	Factor1	Factor2	Factor3	Factor4
1										
2	Etmp2DEGC					MinMax	-30	60		
3	EtmpSD2DEGC					MinMax	-30	60		
4	Etmpmax2DEGC					MinMax	-30	60		
5	Etmpmin2DEGC					MinMax	-30	60		
10	Anem39aMS					MinMax	0	90		
11	Anem39bMS					MinMax	0	90		
12	Anem30aMS					MinMax	0	90		
13	Anem30bMS					MinMax	0	90		
14	Anem10MS					MinMax	0	90		
20	AnemSD39aMS					MinMax	0	4	0	0
21	AnemSD39bMS					MinMax	0	4	0	0
22	AnemSD30aMS					MinMax	0	4	0	0
23	AnemSD30bMS					MinMax	0	4	0	0
24	AnemSD10MS					MinMax	0	4	0	0
30	Vane39DEG					MinMax	0	359.9		
31	Vane30DEG					MinMax	0	359.9		
32	Vane10DEG					MinMax	0	359.9		
50	Turb39zNONE					MinMax	0	2		
51	Turb30zNONE					MinMax	0	2		
52	Turb10zNONE					MinMax	0	2		
60	Wshr0zNONE					MinMax	-100	100		
200	VaneSD39DEG	Anem39yMS				MinMaxT	0	100	100	10
201	VaneSD30DEG	Anem30yMS				MinMaxT	0	100	100	10
202	VaneSD10DEG	Anem10MS				MinMaxT	0	100	100	10
301	Anem39aMS	AnemSD39aMS	Vane39DEG	VaneSD39DEG	Etmp2DEGC	Icing	0.5	1	2	2
302	Anem39bMS	AnemSD39bMS	Vane39DEG	VaneSD39DEG	Etmp2DEGC	Icing	0.5	1	2	2
303	Anem30aMS	AnemSD30aMS	Vane30DEG	VaneSD30DEG	Etmp2DEGC	Icing	0.5	1	2	2
304	Anem30bMS	AnemSD30bMS	Vane30DEG	VaneSD30DEG	Etmp2DEGC	Icing	0.5	1	2	2
305	Anem10MS	AnemSD10MS	Vane10DEG	VaneSD10DEG	Etmp2DEGC	Icing	0.5	1	2	2
400	Anem39aMS	Anem39bMS				CompareSensors	1	0.35	3	0
401	Anem30aMS	Anem30bMS				CompareSensors	1	0.35	3	0
500	Amax39aMS					MinMax	0	90		
501	Amin39aMS					MinMax	0	90		
502	Amax39bMS					MinMax	0	90		
503	Amin39bMS					MinMax	0	90		

504	Amax30aMS					MinMax	0	90		
505	Amin30aMS					MinMax	0	90		
506	Amax30bMS					MinMax	0	90		
507	Amin30bMS					MinMax	0	90		
508	Amax10MS					MinMax	0	90		
509	Amin10MS					MinMax	0	90		
510	Vmax39DEG					MinMax	0	359.9		
511	Vmin39DEG					MinMax	0	359.9		
512	Vmax30DEG					MinMax	0	359.9		
513	Vmin30DEG					MinMax	0	359.9		
514	Vmax10DEG					MinMax	0	359.9		
515	Vmin10DEG					MinMax	0	359.9		

Sensor Statistics

Sensor	Expected Data Points	Actual Data Points	% Data Recovered	Hours Out of Range	Hours of Icing	Hours of Fault	% Data Good
Etmp2DEGC	52561	52561	100	0	0	0	100
EtmpSD2DEGC	52561	52561	100	0	0	0	100
Anem39aMS	52561	52561	100	0.5	0	4.5	99.943
AnemSD39aMS	52561	52561	100	0.5	0	4.5	99.943
Anem39bMS	52561	52561	100	0.5	0	0.333	99.99
AnemSD39bMS	52561	52561	100	0.5	0	0.333	99.99
Anem30aMS	52561	52561	100	0.5	0	1.667	99.975
AnemSD30aMS	52561	52561	100	0.5	0	1.667	99.975
Anem30bMS	52561	52561	100	0.5	0	0.333	99.99
AnemSD30bMS	52561	52561	100	0.5	0	0.333	99.99
Anem10MS	52561	52561	100	0	0	0	100
AnemSD10MS	52561	52561	100	0	0	0	100
Vane39DEG	52561	52561	100	0.333	0	0	99.996
VaneSD39DEG	52561	52561	100	2.167	0	0	99.975
Vane30DEG	52561	52561	100	0.5	0	0	99.994
VaneSD30DEG	52561	52561	100	2.167	0	0	99.975
Vane10DEG	52561	52561	100	0.833	0	0	99.99
VaneSD10DEG	52561	52561	100	3	0	0	99.966
Total	946098	946098	100	13	0	13.667	99.983

APPENDIX B - Plot Data

Wind Speed Distribution Data

Bin Center Wind Speed [m/s]	April 05 – March 06 [%]
0.5	1.95
1.5	4.15
2.5	8.95
3.5	15.61
4.5	19.59
5.5	16.47
6.5	12.1
7.5	8.06
8.5	5.5
9.5	3.12
10.5	1.95
11.5	1.01
12.5	0.55
13.5	0.35
14.5	0.29
15.5	0.19
16.5	0.08
17.5	0.06
18.5	0.02
19.5	0
20.5	0
21.5	0
22.5	0
23.5	0
24.5	0

Monthly Average Wind Speed Data

Date	39m Mean 10 min [m/s]
2005 April	5.68
May	5.72
June	5
July	4.55
August	4.46
September	4.64
October	5.64
November	5.33
December	5.22
2006 January	5.91
February	5.94
March	5.23
April 05 – March 06	5.28

Diurnal Average Wind Speed Data

Hour of Day	April 05 – March 06
0	5
1	5
2	5.02
3	4.98
4	4.94
5	4.86
6	4.88
7	5.05
8	5.3
9	5.58
10	5.82
11	5.94
12	5.99

13	5.97
14	5.88
15	5.74
16	5.47
17	5.15
18	5.02
19	4.99
20	4.99
21	4.94
22	5.01
23	4.99

Wind Rose Data

April 05 – March 06		
Direction	Percent Time [%]	Mean Wind Speed [m/s]
N	9.6	5.92
NNE	6.78	5.69
NE	3.9	5.72
ENE	2.51	5.32
E	2.07	4.39
ESE	2.16	4.66
SE	4.66	4.55
SSE	3.87	4.77
S	5.38	4.5
SSW	9.76	5.02
SW	13.55	5.79
WSW	8.15	5.29
W	6.88	5.09
WNW	7.44	5.07
NW	7.21	5.13
NNW	6.07	5.38