

# **WIND DATA REPORT**

## **Camden Hills Regional High School, ME**

December 1, 2006 – February 28, 2007

Prepared for

U.S. Department of Energy, Golden Field Office  
1617 Cole Boulevard  
Mail Stop 1501  
Golden, Colorado 80401-3393

by

Matthew A. Lackner  
James F. Manwell  
Anthony L. Rogers  
Anthony F. Ellis

July 31, 2007

Report template version 3.1.1

---

**Renewable Energy Research Laboratory**  
University of Massachusetts, Amherst  
160 Governors Drive, Amherst, MA 01003  
[www.ceere.org/rerl](http://www.ceere.org/rerl) • (413) 545-4359 • [rerl@ecs.umass.edu](mailto:rerl@ecs.umass.edu)



# TABLE OF CONTENTS

Table of Contents.....	1
Table of Figures.....	2
Executive Summary.....	3
SECTION 1 - Station Location.....	4
SECTION 2 - Instrumentation and Equipment.....	4
SECTION 3 - Data Summary.....	5
SECTION 4 - Graphs.....	7
Wind Speed Time Series.....	8
Wind Speed Distributions.....	8
Monthly Average Wind Speeds.....	9
Diurnal Average Wind Speeds.....	9
Turbulence Intensities.....	10
Wind Roses.....	11
SECTION 5 - Significant Meteorological Events.....	12
SECTION 6 - Data Collection and Maintenance.....	12
SECTION 7 - Data Recovery and Validation.....	12
Test Definitions.....	12
Sensor Statistics.....	13
APPENDIX A - Sensor Performance Report.....	15
Test Definitions.....	15
Sensor Statistics.....	16
APPENDIX B - Plot Data.....	17
Wind Speed Distribution Data.....	17
Monthly Average Wind Speed Data.....	18
Diurnal Average Wind Speed Data.....	18
Wind Rose Data.....	19

## TABLE OF FIGURES

Figure 1 - Camden Hills Regional High School Site Location.....	4
Figure 2 - Wind Speed Time Series, December 1, 2006 - February 28, 2007.....	8
Figure 3 - Wind Speed Distribution, December 1, 2006 - February 28, 2007.....	8
Figure 4 - Monthly Average Wind Speed, February, 2006 – February, 2007.....	9
Figure 5 - Diurnal Wind Speed, December 1, 2006 - February 28, 2007.....	9
Figure 6 - Turbulence Intensity vs. Wind Speed, December 1, 2006 - February 28, 2007.....	10
Figure 7 - Wind Rose, December 1, 2006 - February 28, 2007.....	11

## EXECUTIVE SUMMARY

All the work presented in this Wind Data Report including installation and decommissioning of the meteorological tower and instrumentation, and the data analysis and reporting was performed by the Renewable Energy Research Laboratory (RERL) at the University of Massachusetts, Amherst.

This report covers wind data measured at the Camden Hills Regional High School site in Maine, which was installed on February 1, 2006. Two anemometers and one wind vane are mounted at both 39 m (127.9 ft) and 30 m (98.4 ft).

The period covered by this report is December 1, 2006 – February 28, 2007. The quarterly mean recorded wind speed at 39 m was 4.1 m/s (9.2 mph)\* and the prevailing direction was from the northwest. The gross data recovery percentage (the actual percentage of expected data received) for the quarter was 100 % and the net data recovery percentage (the percentage of expected data which passed all of the quality assurance tests) for the quarter was 95.2%.

Additional information about interpreting the data presented in this report can be found in the Fact Sheet, “Interpreting Your Wind Resource Data,” produced by RERL and the Massachusetts Technology Collaborative (MTC). This document is found through the RERL website:

[http://www.ceere.org/rerl/about\\_wind/RERL\\_Fact\\_Sheet\\_6\\_Wind\\_resource\\_interpretation.pdf](http://www.ceere.org/rerl/about_wind/RERL_Fact_Sheet_6_Wind_resource_interpretation.pdf)

\* 1 m/s = 2.237 mph.

## SECTION 1 - Station Location

The station is located at the Camden Hills Regional High School. The tower base is located at  $44.190^{\circ}$  N,  $69.100^{\circ}$  W (WGS84/ NAD83) (Figure 1). The red cross indicates the approximate location of the tower.

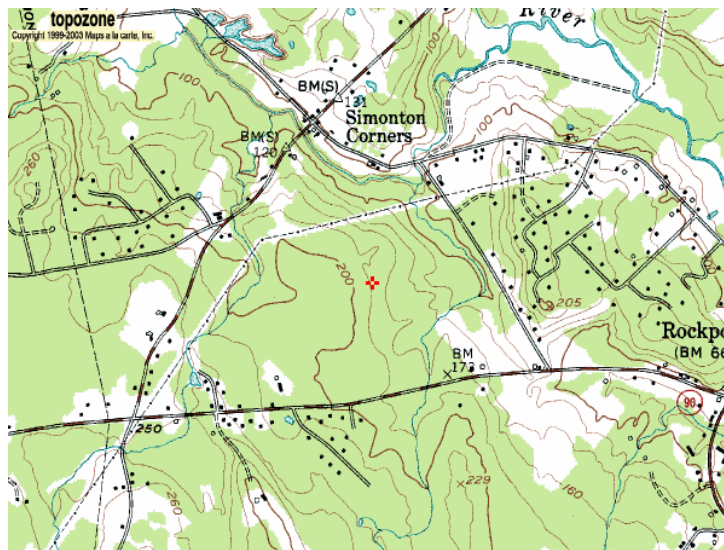


Figure 1 - Camden Hills Regional High School Site Location

Source: [www.topozone.com](http://www.topozone.com).

## SECTION 2 - Instrumentation and Equipment

The wind monitoring equipment is mounted on a 40 m (131.2 ft) meteorological tower. All the remaining monitoring equipment comes from NRG Systems, and consists of the following items:

- Symphonie Data Logger
- 4 – #40 Anemometers, standard calibration (Slope - 0.765 m/s, Offset – 0.350 m/s). Two anemometers are located at 39 m (127.9 ft), and two at 30 m (98.4 ft).
- 2 - #200P Wind direction vanes. They are located at heights of 39 m (127.9 ft) and 30 m (98.4 ft).
- 4 – Sensor booms, 12' length
- Lightning rod and grounding cable

The data from the Symphonie logger is mailed to the University of Massachusetts, Amherst on a regular basis. The logger samples wind speed and direction once every two

seconds. These are then combined into 10-minute averages, and along with the standard deviation for those 10-minute periods, are put into a binary file. These binary files are converted to ASCII text files using the NRG software BaseStation®. These text files are then imported into a database software program where they are subjected to QA tests prior to using the data.

## SECTION 3- Data Summary

A summary of the wind speeds and wind directions measured during the reporting period is included in Table 1. Table 1 includes the mean wind speeds measured at each measurement height, the maximum instantaneous wind speed measured at each measurement height and the prevailing wind direction measured at each measurement height. These values are provided for each month of the reporting period and for the whole reporting period.

**Table 1. Wind Speed and Direction Data Summary**

<b>Date</b>	<b>Mean Wind Speed</b>	<b>Max Wind Speed</b>	<b>Prevailing Wind Direction</b>	<b>Mean Wind Speed</b>	<b>Max Wind Speed</b>	<b>Prevailing Wind Direction</b>
<b>Height Units</b>	<b>39 m [m/s]</b>	<b>39 m [m/s]</b>	<b>39 m [m/s]</b>	<b>30 m [m/s]</b>	<b>30 m [m/s]</b>	<b>30 m [m/s]</b>
Dec 2006	3.98	12.3	W	3.48	11.0	W
Jan 2007	4.06	12.6	NW	3.70	11.3	NW
Feb 2007	4.34	13.9	WNW	3.83	12.8	WNW
<b>Dec 2006 -Feb 2007</b>	4.12	13.9	NW	3.67	12.8	NW

Wind data statistics in the table are reported when more than 90% of the data during the reporting period are valid. In cases when a larger amount of data are missing, the percent of the available data that are used to determine the data statistics is noted.

No measurement of wind speed or direction can be perfectly accurate. Wind speed measurement errors occur due to anemometer manufacturing variability, anemometer calibration errors, the response of anemometers to turbulence and vertical air flow and due to air flows caused by the anemometer mounting system. Every effort is made to reduce the sources of these errors. Nevertheless, the values reported in this report have an expected uncertainty of about  $\pm 2\%$  or  $\pm 0.2$  m/s, whichever is greater. Wind direction measurement errors occur due to sensor measurement uncertainty, tower effects, boom alignment measurement errors and twisting of pipe sections during the raising of a pipe

tower. Efforts are also made to reduce these errors, but the reported wind directions are estimated to have an uncertainty of +/- 5 degrees.

A summary of the turbulence intensity and mean wind shear measured at each measurement height during the reporting period is included in Table 2. These values are provided for each month of the reporting period and for the whole reporting period. Turbulence Intensity is calculated by dividing the standard deviation of the wind speed by the mean wind speed and is a measure of the gustiness of a wind resource. Lower turbulence results in lower mechanical loads on a wind turbine. Turbulence intensity varies with wind speed. The average turbulence intensity presented in Table 2 is the mean turbulence intensity when the wind speed at each measurement height is between 10 and 11 m/s.

Shear coefficients provide a measure of the change in wind speed with height. When data at multiple heights are available, shear coefficients,  $\alpha$ , have been determined. They can be used in the following formula to estimate the average wind speed,  $U(z)$ , at height  $z$ , when the average wind speed,  $U(z_r)$ , at height  $z_r$  is known:

$$U(z) = U(z_r) \left( \frac{z}{z_r} \right)^\alpha$$

The change in wind speed with height is a very complicated relationship related to atmospheric conditions, wind speed, wind direction, time of day and time of year. This formula will not always provide the correct answer at any given site. Nevertheless the calculated shear coefficient, based on measurements at two heights, can be used to characterize the degree of increase in wind speed with height at a site.

The mean wind shear coefficient that is provided here is calculated based on the mean wind speeds in Table 1, where  $z_{high}$  and  $z_{low}$  are the heights of the higher and lower mean wind speeds used in the calculation and  $U(z_{low})$  and  $U(z_{high})$  are the mean wind speeds at the two heights.

$$\alpha = \log \left( \frac{U(z_{high})}{U(z_{low})} \right) / \log \left( \frac{z_{high}}{z_{low}} \right)$$

**Table 2. Shear and Turbulence Intensity Data Summary**

Date	Turbulence Intensity at 10 m/s	Turbulence Intensity at 10 m/s	Mean Wind Shear Coefficient, $\alpha$
Height Units	39 m [-]	30 m [-]	Between 39 m and 30 m [-]
Dec 2006	0.27	0.28	0.51
Jan 2007	0.27	0.28	0.35
Feb 2007	0.25	0.28	0.48
<b>Dec 2006 -Feb 2007</b>	<b>0.26</b>	<b>0.28</b>	<b>0.44</b>

## SECTION 4- Graphs

This report contains several types of wind data graphs. Unless otherwise noted, each graph represents data from 1 quarter (3 months). The following graphs are included:


- Time Series – 10-minute average wind speeds at a height of 39 m are plotted against time. The wind speed time series is shown in Figure 2.
- Wind Speed Distribution – A histogram plot giving the percentage of time that the wind is at a given wind speed at a height of 39 m. The wind blows most frequently between 3 m/s and 4 m/s, for approximately 17.9% of the time. The wind speed distribution is shown in Figure 3.
- Monthly Average – A plot of the monthly average wind speed at a height of 39 m from February 2006 - February 2007. This graph shows the trends in the wind speed over the year. The monthly average wind speed plot is shown in Figure 4.
- Diurnal – A plot of the average wind speed for each hour of the day at a height of 39 m. The wind speeds are highest between 1 pm and 2 pm, and lowest between 3 am and 4 am. The diurnal variation plot is shown in Figure 5.
- Turbulence Intensity – A plot of turbulence intensity as a function of wind speed at a height of 39 m. Turbulence Intensity is calculated as the standard deviation of the wind speed divided by the wind speed and is a measure of the gustiness of a wind resource. Lower turbulence results in lower mechanical loads on a wind turbine. In general, turbulence intensities range from 0.1 to 0.5; for Camden, the average turbulence intensity was 0.26 at a height of 39 m. The turbulence intensity plot is shown in Figure 6.



- Wind Rose – A plot, by compass direction showing the percentage of time that the wind comes from a given direction and the average wind speed in that direction at a height of 39 m. This wind rose shows the prevailing direction from the west, and wind speeds are greatest from the northwest. The wind rose plot is shown in Figure 7.


Data for the wind speed histograms, monthly and diurnal average plots, and wind roses are included in APPENDIX B.

### Wind Speed Time Series

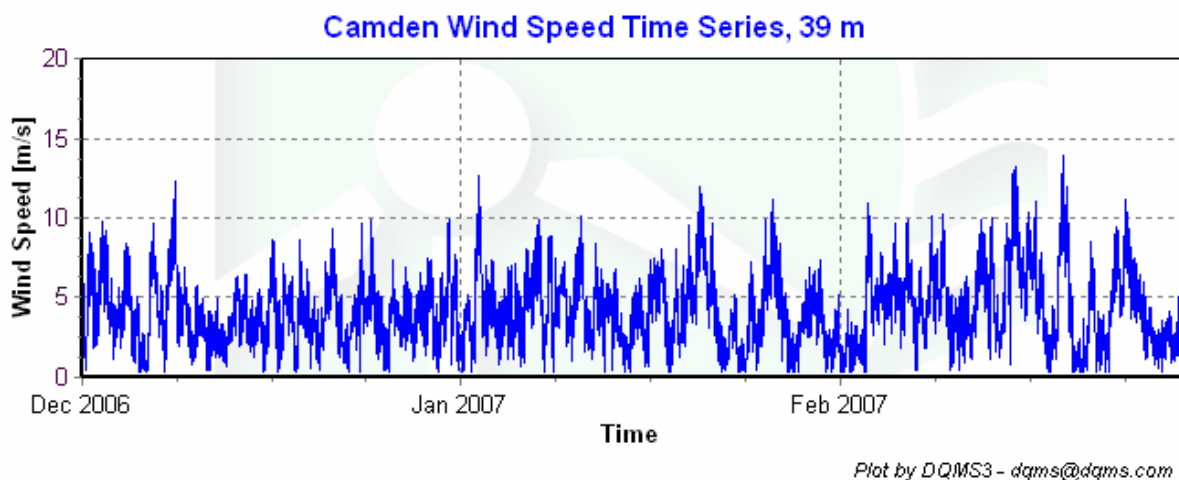

**Figure 2 - Wind Speed Time Series, December 1, 2006 - February 28, 2007.**

### Wind Speed Distributions

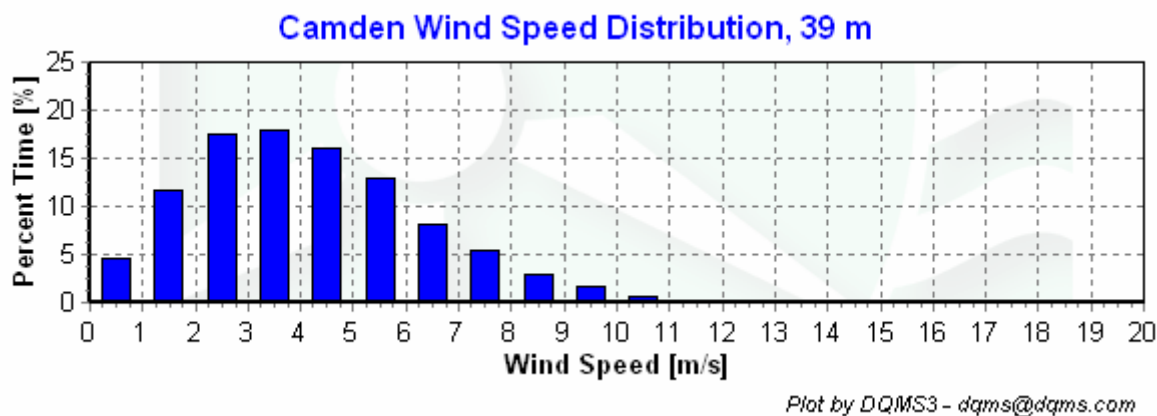

**Figure 3 - Wind Speed Distribution, December 1, 2006 - February 28, 2007.**

### Monthly Average Wind Speeds

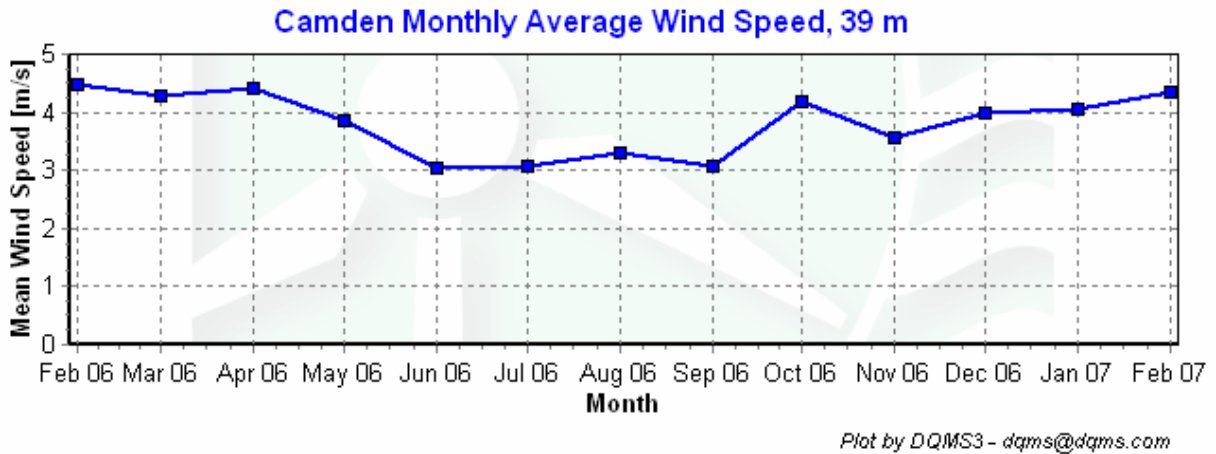


Figure 4 - Monthly Average Wind Speed, February, 2006 – February, 2007

### Diurnal Average Wind Speeds

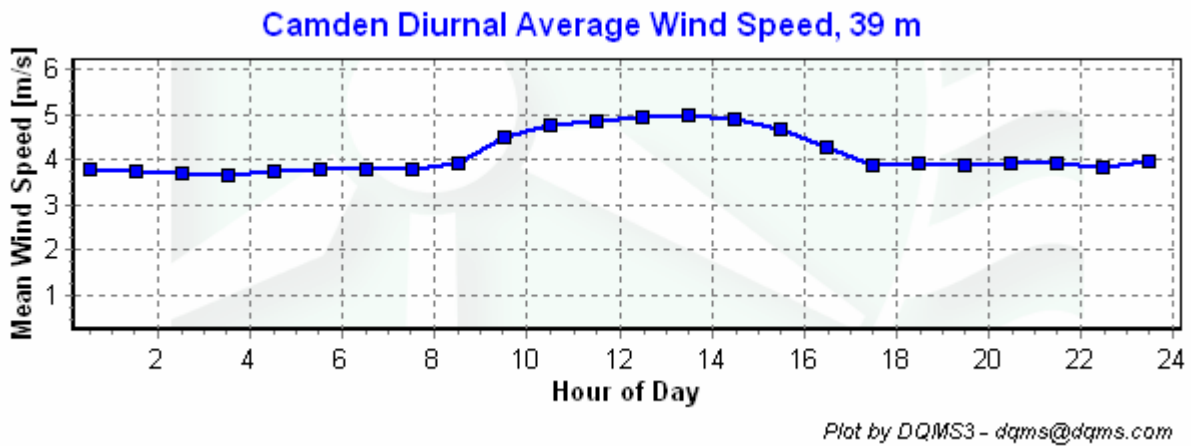


Figure 5 - Diurnal Wind Speed, December 1, 2006 - February 28, 2007.

## Turbulence Intensities


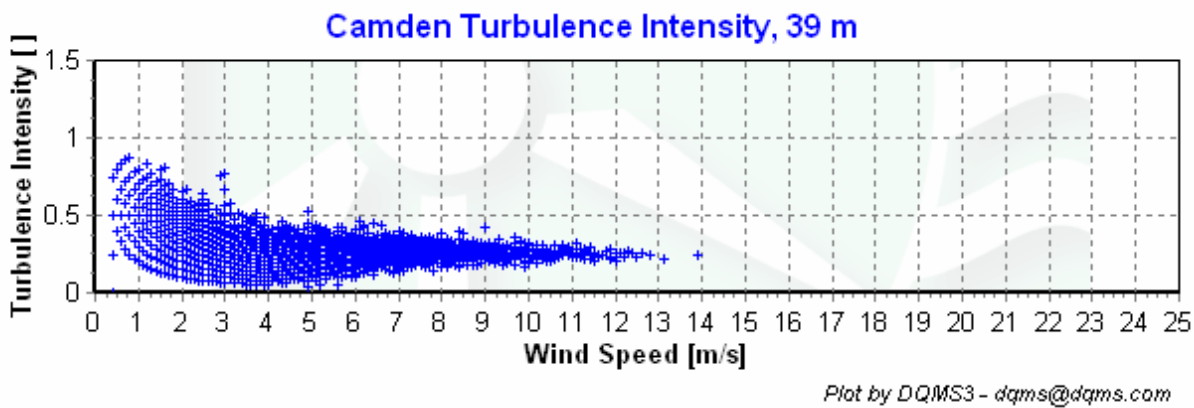


Figure 6 - Turbulence Intensity vs. Wind Speed, December 1, 2006 - February 28, 2007.

## Wind Roses

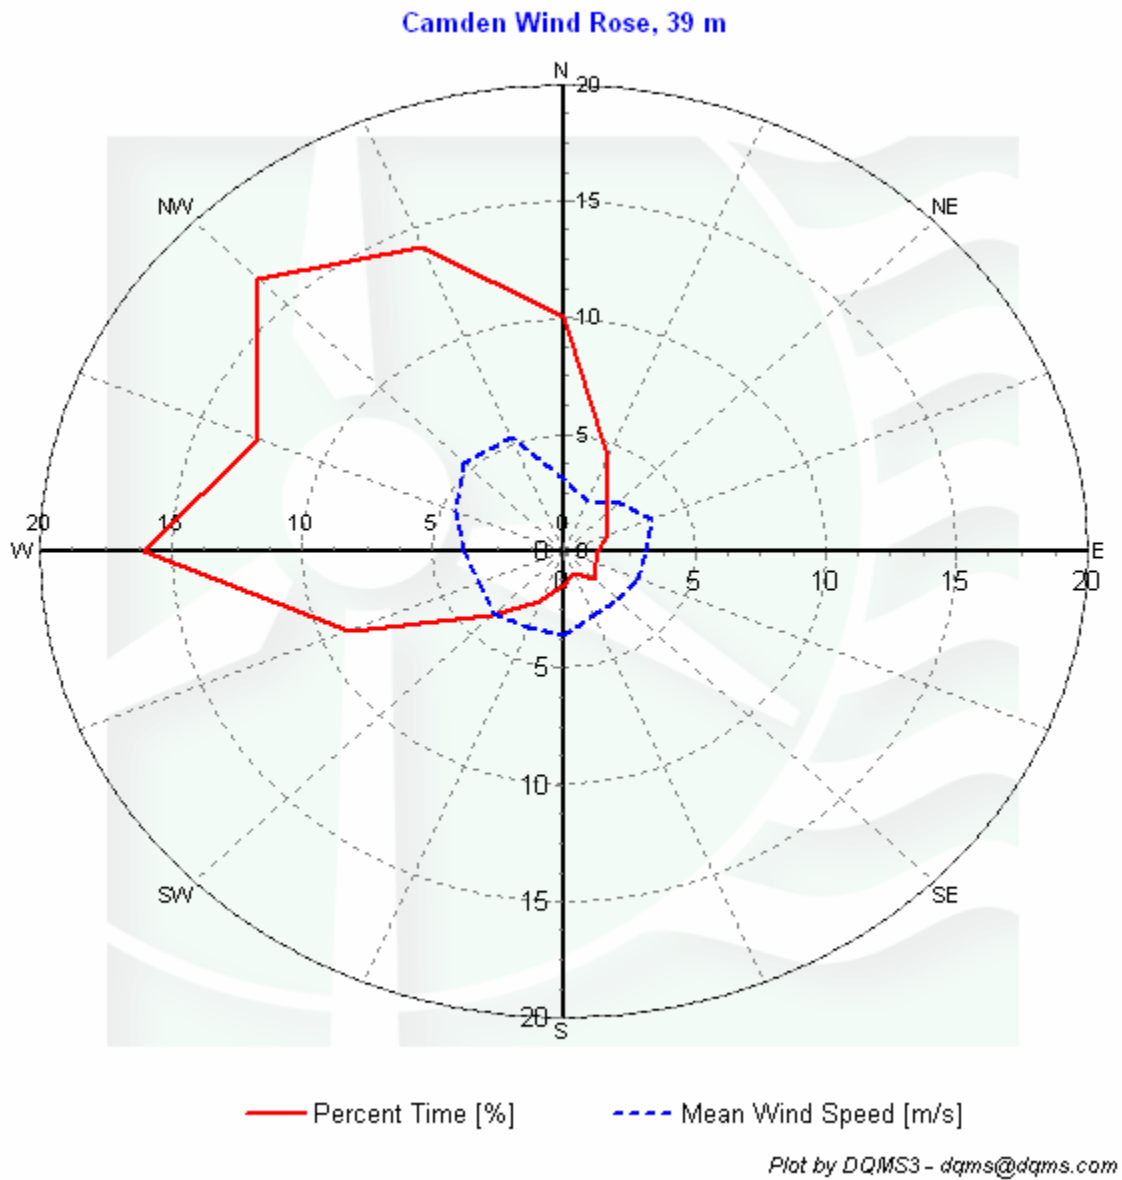

**Figure 7 - Wind Rose, December 1, 2006 - February 28, 2007.**

## SECTION 5 - Significant Meteorological Events

There were no significant meteorological events during this period.

## SECTION 6 - Data Collection and Maintenance

No maintenance was performed during this period.

## SECTION 7 - Data Recovery and Validation

All raw wind data are subjected to a series of tests and filters to weed out data that are faulty or corrupted. Definitions of these quality assurance (QA) controls are given below under Test Definitions and Sensor Statistics. These control filters were designed to automate the quality control process and used many of the previous hand-worked data sets made at UMass to affect a suitable emulation. The gross percentage of data recovered (ratio of the number of raw data points received to data points expected) and net percentage (ratio of raw data points which passed all QA control tests to data points expected) are shown below.

Gross Data Recovered [%]	100
Net Data Recovered [%]	95.198

### Test Definitions

All raw data were subjected to a series of validation tests, as described below. The sensors tested and the parameters specific to each sensor are given in the Sensor Performance Report which is included in APPENDIX A. Data which were flagged as invalid were not included in the statistics presented in this report.

**MinMax Test:** All sensors are expected to report data values within a range specified by the sensor and logger manufacturers. If a value falls outside this range, it is flagged as invalid. A data value from the sensor listed in Test Field 1 (TF1) is flagged if it is less than Factor 1 (F1) or greater than Factor 2. This test has been applied to the following sensors (as applicable): wind speed, wind speed standard deviation, wind direction, temperature, and solar insolation.

$$F1 > TF1 > F2$$

**MinMaxT Test:** This is a MinMax test for wind direction standard deviation with different ranges applied for high and low wind speeds. A wind direction standard deviation data value (TF1) is flagged either if it is less than Factor 1, if the wind speed (TF2) is less than Factor 4 and the wind direction standard deviation is greater than

Factor 2, or if the wind speed is greater than or equal to Factor 4 and the wind direction standard deviation is greater than Factor 3.

$$\begin{aligned} & (TF1 < F1) \\ & \text{or } (TF2 < F4 \text{ and } TF1 > F2) \\ & \text{or } (TF2 \geq F4 \text{ and } TF1 > F3) \end{aligned}$$

**Icing Test:** An icing event occurs when ice collects on a sensor and degrades its performance. Icing events are characterized by the simultaneous measurements of near-zero standard deviation of wind direction, non-zero wind speed, and near- or below-freezing temperatures. Wind speed, wind speed standard deviation, wind direction, and wind direction standard deviation data values are flagged if the wind direction standard deviation (CF1) is less than or equal to Factor 1 (F1), the wind speed (TF1) is greater than Factor 2 (F2), and the temperature (CF2) is less than Factor 3 (F3). To exit an icing event, the wind direction standard deviation must be greater than Factor 4.

$$CF1 \leq F1 \text{ and } TF1 > F2 \text{ and } CF2 < F3$$

**CompareSensors Test:** Where primary and redundant sensors are used, it is possible to determine when one of the sensors is not performing properly. For anemometers, poor performance is characterized by low data values. Therefore, if one sensor of the pair reports values significantly below the other, the low values are flagged. At low wind speeds (Test Fields 1 and 2 less than or equal to Factor 3) wind speed data are flagged if the absolute difference between the two wind speeds is greater than Factor 1. At high wind speeds (Test Fields 1 or 2 greater than Factor 3) wind speed data are flagged if the absolute value of the ratio of the two wind speeds is greater than Factor 2.

$$\begin{aligned} & [ TF1 \leq F3 \text{ and } TF2 \leq F3 \text{ and } \text{abs}(TF1 - TF2) > F1 ] \\ & \text{or } [ (TF1 > F3 \text{ or } TF2 > F3) \text{ and } (\text{abs}(1 - TF1 / TF2) > F2 \text{ or } \text{abs}(1 - TF2 / TF1) > F2) ] \end{aligned}$$

### Sensor Statistics

A summary of the results of the data collection and filtering are given in the Sensor Performance Report which is included in APPENDIX A. The following categories of information, tabulated for each sensor, are included in that report.

**Expected Data Points:** the total number of sample intervals between the start and end dates (inclusive).

**Actual Data Points:** the total number of data points recorded between the start and end dates.

**% Data Recovered:** the ratio of actual and expected data points (this is the *gross data recovered percentage*).

**Hours Out of Range:** total number of hours for which data were flagged according to MinMax and MinMaxT tests. These tests flag data which fall outside of an expected range.

**Hours of Icing:** total number of hours for which data were flagged according to Icing tests. This test uses the standard deviation of wind direction, air temperature, and wind speed to determine when sensor icing has occurred.

**Hours of Fault:** total number of hours for which data were flagged according to CompareSensors tests. These tests compare two sensors (e.g. primary and redundant anemometers installed at the same height) and flag data points where one sensor differs significantly from the other.

**% Data Good:** the filter results are subtracted from the gross data recovery percentage to yield the *net data recovered percentage*.

# APPENDIX A - Sensor Performance Report

## Test Definitions

Test Order	TestField1	TestField2	Test Field3	Calc Field1	Calc Field2	Calc Field3	TestType	Factor1	Factor2	Factor3	Factor4
1							TimeTest Insert				
4	Etmp2adegc						MinMax	-30	60	0	0
5	EtmpSD2adegc						MinMax	-30	60	0	0
10	Anem39ams						MinMax	0	90		
11	Anem39bms						MinMax	0	90		
12	Anem30ams						MinMax	0	90		
13	Anem30bms						MinMax	0	90		
14	Anem39yms						MinMax	0	90		
15	Anem30yms						MinMax	0	90		
20	AnemSD39ams						MinMax	0	4		
21	AnemSD39bms						MinMax	0	4		
22	AnemSD30ams						MinMax	0	4		
23	AnemSD30bms						MinMax	0	4		
24	AnemSD39yms						MinMax	0	4		
25	AnemSD30yms						MinMax	0	4		
30	Vane39adeg						MinMax	0	359.9		
31	Vane30adeg						MinMax	0	359.9		
50	Turb39zNONE						MinMax	0	2		
51	Turb30zNONE						MinMax	0	2		
60	Wshr0zNONE						MinMax	-100	100		
70	Pwrd39zWMS						MinMax	0	5000		
71	Pwrd30zWMS						MinMax	0	5000		
200	VaneSD39adeg	Anem39yms					MinMaxT	0	100	100	10
201	VaneSD30adeg	Anem30yms					MinMaxT	0	100	100	10
300	Anem39ams	AnemSD39ams	Vane39adeg	VaneSD39adeg	Etmp2adegc		Icing	0.5	1	2	10
301	Anem39bms	AnemSD39bms	Vane39adeg	VaneSD39adeg	Etmp2adegc		Icing	0.5	1	2	10
302	Anem30ams	AnemSD30ams	Vane30adeg	VaneSD30adeg	Etmp2adegc		Icing	0.5	1	2	10
303	Anem30bms	AnemSD30bms	Vane30adeg	VaneSD30adeg	Etmp2adegc		Icing	0.5	1	2	10
400	Anem39ams	Anem39bms					CompareSensors	1	0.25	3	0
401	Anem30ams	Anem30bms					CompareSensors	1	0.25	3	0



### Sensor Statistics

Sensor	Expected Data Points	Actual Data Points	% Data Recovered	Hours Out of Range	Hours of Icing	Hours of Fault	% Data Good
Anem39ams	12960	12960	100	0	105.167	0.667	95.1
AnemSD39ams	12960	12960	100	0	105.167	0.667	95.1
Anem39bms	12960	12960	100	0	105.833	10.667	94.606
AnemSD39bms	12960	12960	100	0	105.833	10.667	94.606
Anem39yms	12960	12960	100	0	105.167	0	95.131
AnemSD39yms	12960	12960	100	0	105.167	0	95.131
Vane39adeg	12960	12960	100	1	111	0	94.815
VaneSD39adeg	12960	12960	100	1	111	0	94.815
Anem30ams	12960	12960	100	0	129	0	94.028
AnemSD30ams	12960	12960	100	0	129	0	94.028
Anem30bms	12960	12960	100	0	100.667	27.833	94.051
AnemSD30bms	12960	12960	100	0	100.667	27.833	94.051
Anem30yms	12960	12960	100	0	106.833	0	95.054
AnemSD30yms	12960	12960	100	0	106.833	0	95.054
Vane30adeg	12960	12960	100	0.667	129	0	93.997
VaneSD30adeg	12960	12960	100	0.667	129	0	93.997
Etmp2adegc	12960	12960	100	0	0	0	100
EtmpSD2adegc	12960	12960	100	0	0	0	100
<b>Total</b>	<b>233280</b>	<b>233280</b>	<b>100</b>	<b>3.333</b>	<b>1785.333</b>	<b>78.333</b>	<b>95.198</b>

## APPENDIX B - Plot Data

### Wind Speed Distribution Data

Bin Center Wind Speed [m/s]	Percent of Time [%]
0.5	4.52
1.5	11.66
2.5	17.58
3.5	17.89
4.5	16.04
5.5	12.99
6.5	8.21
7.5	5.45
8.5	2.95
9.5	1.6
10.5	0.62
11.5	0.3
12.5	0.16
13.5	0.02
14.5	0
15.5	0
16.5	0
17.5	0
18.5	0
19.5	0
20.5	0
21.5	0
22.5	0
23.5	0
24.5	0

Table 1 - Wind Speed Distribution, 39 m, December 1, 2006 - February 28, 2007.

### **Monthly Average Wind Speed Data**

<b>Date</b>	<b>10 min Mean [m/s]</b>
Feb-06	4.48
Mar-06	4.28
Apr-06	4.41
May-06	3.86
Jun-06	3.05
Jul-06	3.07
Aug-06	3.29
Sep-06	3.06
Oct-06	4.18
Nov-06	3.56
Dec-06	3.98
Jan-07	4.06
Feb-07	4.34

**Table 2 - Monthly Average Wind Speeds, 39 m, February, 2006 - February, 2007.**

### **Diurnal Average Wind Speed Data**

<b>Hour of Day</b>	<b>Average Wind Speed [m/s]</b>
0.5	3.26
1.5	3.17
2.5	3.2
3.5	3.23
4.5	3.79
5.5	3.75
6.5	3.7
7.5	3.64
8.5	3.71
9.5	3.77
10.5	3.78
11.5	3.77
12.5	3.93
13.5	4.47
14.5	4.74
15.5	4.84
16.5	4.93
17.5	4.96
18.5	4.88
19.5	4.67
20.5	4.25
21.5	3.88
22.5	3.93
23.5	3.88

**Table 3 - Diurnal Average Wind Speeds, 39 m, December 1, 2006 - February 28, 2007.**

### Wind Rose Data

<b>Direction</b>	<b>Percent Time [%]</b>	<b>Mean Wind Speed [m/s]</b>
<b>N</b>	10.07	3.13
<b>NNE</b>	4.33	2.33
<b>NE</b>	2.35	2.97
<b>ENE</b>	1.84	3.62
<b>E</b>	1.29	3.13
<b>ESE</b>	1.35	3.04
<b>SE</b>	1.75	2.9
<b>SSE</b>	1.07	2.96
<b>S</b>	1.5	3.6
<b>SSW</b>	2.34	3.5
<b>SW</b>	3.91	3.77
<b>WSW</b>	8.88	3.51
<b>W</b>	16.01	3.85
<b>WNW</b>	12.65	4.46
<b>NW</b>	16.56	5.39
<b>NNW</b>	14.11	5.28

**Table 4 - Wind Rose, Time Percentage and Mean Wind Speed by Direction, 39 m, December 1, 2006 – February 28, 2007.**