

# WIND DATA REPORT

## Dartmouth, MA

March 26<sup>th</sup> 2005 to July 31<sup>st</sup> 2006

Prepared for

Massachusetts Technology Collaborative  
75 North Drive  
Westborough, MA 01581

Massachusetts Division of Energy Resources

by

Matthew A. Lackner  
James F. Manwell  
Anthony L. Rogers  
Anthony F. Ellis

December 13, 2006

Report template version 1.3

---

---

Renewable Energy Research Laboratory  
University of Massachusetts, Amherst  
160 Governors Drive, Amherst, MA 01003

[www.ceere.org/rerl](http://www.ceere.org/rerl) • (413) 545-4359 • [rerl@ecs.umass.edu](mailto:rerl@ecs.umass.edu)



## **NOTICE AND ACKNOWLEDGEMENTS**

This report was prepared by the Renewable Energy Research Laboratory (RERL) at the University of Massachusetts, Amherst in the course of performing work sponsored by the Renewable Energy Trust (RET), as administered by the Massachusetts Technology Collaborative (MTC), pursuant to work order number 05-1. The opinions expressed in this report do not necessarily reflect those of MTC or the Commonwealth of Massachusetts, and reference to any specific product, service, process, or method does not constitute an implied or expressed recommendation or endorsement of it.

Further, MTC, the Commonwealth of Massachusetts, and RERL make no warranties or representations, expressed or implied, as to the fitness for particular purpose or merchantability of any product, apparatus, or service, or the usefulness, completeness, or accuracy of any processes, methods or other information contained, described, disclosed, or referred to in this report. MTC, the Commonwealth of Massachusetts, and the contractor make no representation that the use of any product, apparatus, process, method, or other information will not infringe privately owned rights and will assume no liability for any loss, injury, or damage directly or indirectly resulting from, or occurring in connection with, the use of information contained, described, disclosed, or referred to in this report.

# TABLE OF CONTENTS

NOTICE AND ACKNOWLEDGEMENTS .....	1
Table of Contents .....	2
Table of Figures .....	3
Executive Summary .....	4
SECTION 1 - Station Location .....	5
SECTION 2 - Instrumentation and Equipment .....	5
SECTION 3 - Data Collection and Maintenance .....	6
SECTION 4 - Significant Meteorological Events .....	7
SECTION 5 - Data Recovery and Validation .....	7
Test Definitions .....	8
Sensor Statistics .....	9
SECTION 6 - Data Summary .....	10
SECTION 7 - Graphs .....	11
Wind Speed Time Series .....	11
Wind Speed Distributions .....	11
Monthly Average Wind Speeds .....	12
Diurnal Average Wind Speeds .....	12
Turbulence Intensities .....	13
Wind Rose .....	14
APPENDIX A – Sensor Performance Report .....	15
Test Definitions .....	15
Sensor Statistics .....	16
APPENDIX B - Plot Data .....	17
Wind Speed Distribution Data .....	17
Monthly Average Wind Speed Data .....	17
Diurnal Average Wind Speed Data .....	18
Wind Rose Data .....	19

## TABLE OF FIGURES

Figure 1 - Dartmouth Site Location .....	5
Figure 2 - Wind Speed Time Series, March 26, 2005 – July 31, 2006.....	11
Figure 3 - Wind Speed Distribution, August 1, 2005 – July 31, 2006.....	11
Figure 4 - Monthly Average Wind Speeds, April 1, 2005 – July 31, 2006.....	12
Figure 5 - Diurnal Wind Speed, August 1, 2005 – July 31, 2006.....	12
Figure 6 - Turbulence Intensity vs. Wind Speed, August 1, 2005 – July 31, 2006.....	13
Figure 7 - Wind Rose, August 1, 2005 – July 31, 2006.....	14

## EXECUTIVE SUMMARY

All the work presented in this Wind Data Report including installation and decommissioning of the meteorological tower and instrumentation, and the data analysis and reporting was performed by the Renewable Energy Research Laboratory (RERL) at the University of Massachusetts, Amherst.

Wind monitoring at Dartmouth commenced on March 26<sup>th</sup>, 2005, and the station was removed in September, 2006. Wind speed and direction are measured at three heights: 50 m, 38 m and 20 m.

This final report presents data for the entire duration of the wind monitoring campaign at Dartmouth. While the tower was not removed until September, because of problems with the data card, there is no wind data after July 31, 2006. Thus, there is data for the Dartmouth site from March 26, 2005 until July 31, 2006. The data is not continuous over this period, however, as a problem with the logger caused there to be no data for the month of December, 2005.

Because of seasonal variations in the wind speed, wind data is typically reported in integer year intervals. Thus, while there are approximately 16 total months of data, all the yearly summary statistic provided, and all graphs except for the time series graph and monthly average graph, are from the period of August 1, 2005 until July 31, 2006, which covers exactly one year. Once again, it must be emphasized that all the data from December, 2005 is missing, and so the yearly statistics and graphs are missing the December, 2005 data.

During the period of August 1, 2005 to July 31, 2006, the mean recorded wind speed at 50 meters was 4.8 m/s (10.6 mph \*) and the prevailing wind direction at 50 m was SW. The gross data recovery percentage (the actual percentage of expected data received) was 90.7 % and the net data recovery percentage (the percentage of expected data which passed all of the quality assurance tests) was 89.1%. The vast majority of this missing data was due to the logger failure in December, 2005.


Additional information about interpreting the data presented in this report can be found in the Fact Sheet, "Interpreting Your Wind Resource Data," produced by RERL and the Massachusetts Technology Collaborative (MTC). This document is found through the RERL website:

[http://www.ceere.org/rerl/about\\_wind/RERL\\_Fact\\_Sheet\\_6\\_Wind\\_resource\\_interpretation.pdf](http://www.ceere.org/rerl/about_wind/RERL_Fact_Sheet_6_Wind_resource_interpretation.pdf)

\* 1 m/s = 2.237 mph.

## SECTION 1 - Station Location

The site is located close to the drainage pits in the Dartmouth Water Treatment Facility premises. The site elevation is 9 m above sea level. The location of the tower base is at 41.590°N, 70.998°W (WGS84/NAD83).

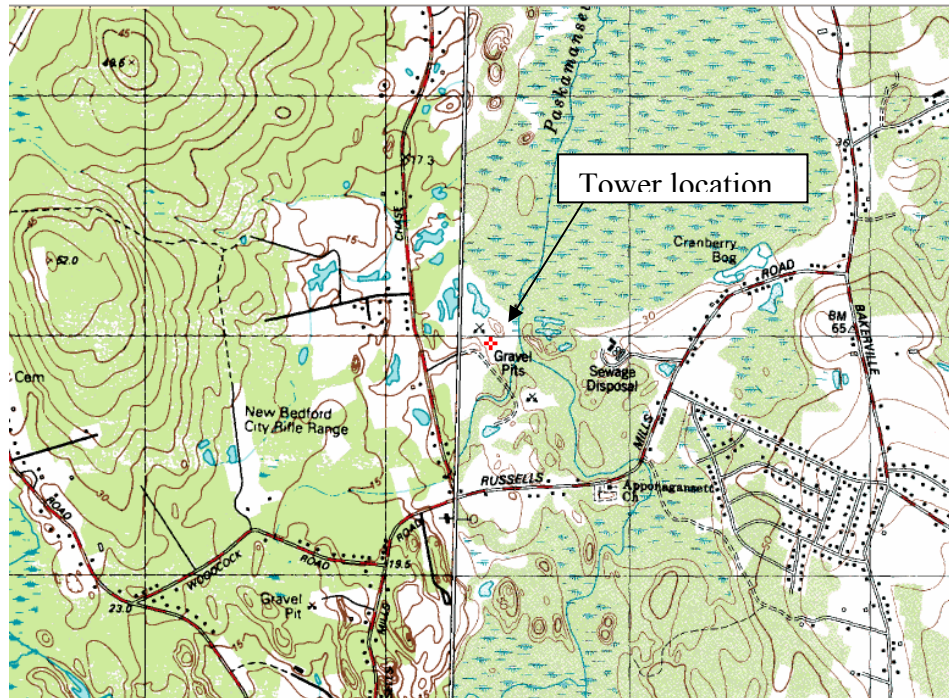

**Figure 1 - Dartmouth Site Location**

Source: [www.topozone.com](http://www.topozone.com).

## SECTION 2 - Instrumentation and Equipment

Wind monitoring equipment is mounted on a standard Second Wind 50 m tall 6-inch diameter tilt-up guyed tower. Wind vanes and anemometers are located at three heights on the tower: 50 m, 38 m, and 20 m. Redundant anemometers are also positioned at 50 m and 38 m.

Additional equipment and models:

- NRG model Symphonie Cellogger
- 5 – #40 Anemometers, standard calibration (Slope - 0.765 m/s, Offset – 0.350 m/s)
- 3 - #200P Wind direction vanes

- Lightning rod and grounding cable
- NRG 11S temperature Sensor

The data from the Symphonie logger was mailed to the University of Massachusetts, Amherst on a regular basis. The logger samples wind speed and direction once every two seconds. These are then combined into 10-minute averages, and along with the standard deviation for those 10-minute periods, are put into a binary file. These binary files are converted to ASCII text files using the NRG software BaseStation®. These text files are then imported into a database software program where they are subjected to QA tests prior to using the data.

## SECTION 3- Data Collection and Maintenance

The following maintenance/equipment problems occurred during the report period, and the following corrective actions taken:

The logger was replaced at the end of December, 2005.

The tower was removed from the site in September.

### Data Statistics Summary

Date	Mean Wind Speed	Max Wind Speed	Prevailing Wind Direction	Turbulence Intensity	Mean Wind Speed	Max Wind Speed	Prevailing Wind Direction	Turbulence Intensity	Mean Wind Speed	Max Wind Speed	Prevailing Wind Direction	Turbulence Intensity	Shear Coefficient
Heights, units	50 m, [m/s]	50 m, [m/s]	50 m, [ ]	50 m, [ ]	38 m, [m/s]	38 m, [m/s]	38 m, [ ]	38 m, [ ]	20 m, [m/s]	20 m, [m/s]	20 m, [ ]	20 m, [ ]	50 m, 38 m
05-Apr	5.0	14.4	SW	0.22	4.4	13.1	SW	0.25	3.2	10.0	SW	0.33	0.51
05-May	4.7	14.2	NNE	0.23	4.2	12.9	NNE	0.27	3.0	9.9	N	0.34	0.53
05-Jun	4.1	10.2	SW	0.23	3.7	9.3	SW	0.27	2.7	7.2	SW	0.35	0.46
05-Jul	4.0	11.1	SW	0.22	3.5	9.9	SW	0.26	2.4	8.1	SW	0.35	0.54
05-Aug	3.8	11.5	SW	0.22	3.3	10.5	SW	0.26	2.2	8.3	SW	0.36	0.66
05-Sep	4.0	11.6	SW	0.20	3.4	10.7	SW	0.30	2.2	8.6	SSW	0.32	0.73
05-Oct	5.0	15.3	WNW	0.20	4.3	14.0	WNW	0.30	3.0	10.5	NE	0.34	0.72
05-Nov	5.1	13.9	SW	0.20	4.3	12.7	SW	0.30	3.0	9.9	SW	0.32	0.67
05-Dec	-	-	-	-	-	-	-	-	-	-	-	-	-
06-Jan	5.2	14.8	SW	0.22	4.6	12.9	SW	0.25	3.4	10.6	SW	0.31	0.56
06-Feb	5.7	14.0	NW	0.22	4.9	13.2	NW	0.24	3.8	10.9	WNW	0.30	0.45
06-Mar	5.0	14.1	NW	0.22	4.4	13.0	NW	0.25	3.3	10.3	WNW	0.31	0.51
06-Apr	5.1	11.8	SW	0.21	4.5	10.6	SW	0.25	3.3	8.6	N	0.33	0.60
06-May	4.8	12.0	SW	0.23	4.2	10.9	SW	0.28	3.1	8.3	SW	0.35	0.65

06-Jun	4.3	11.6	SW	0.22	3.7	10.0	SW	0.27	2.7	7.3	SSW	0.35	0.67
06-Jul	4.3	11.2	SW	0.22	3.7	10.5	SW	0.26	2.6	8.0	SW	0.35	0.67
<b>Aug 05 – Jul 06</b>	<b>4.8</b>	<b>15.3</b>	<b>SW</b>	<b>0.21</b>	<b>4.1</b>	<b>14.0</b>	<b>SW</b>	<b>0.27</b>	<b>3.0</b>	<b>10.9</b>	<b>SW</b>	<b>0.33</b>	<b>0.63</b>

Wind data statistics in the table are reported when more than 90% of the data during the reporting period are valid. In cases when a larger amount of data is missing, the percent of the available data that are used to determine the data statistics is noted.

No measurement of wind speed can be perfectly accurate. Errors occur due to anemometer manufacturing variability, anemometer calibration errors, the response of anemometers to turbulence and vertical air flow and due to air flows caused by the anemometer mounting system. Every effort is made to reduce the sources of these errors. Nevertheless, the values reported in this report have an expected uncertainty of about  $\pm 2\%$  or  $\pm 0.2$  m/s, whichever is greater.

When data at multiple heights are available, shear coefficients,  $\alpha$ , have been determined. They can be used in the following formula to estimate the average wind speed,  $U(z)$ , at height  $z$ , when the average wind speed,  $U(z_r)$ , at height  $z_r$  is known:

$$U(z) = U(z_r) \left( \frac{z}{z_r} \right)^\alpha$$

The change in wind speed with height is a very complicated relationship related to atmospheric conditions, wind speed, wind direction, time of day and time of year. This formula may not provide the correct answer at any given site. Nevertheless the calculated shear coefficient, based on measurements at two heights, can be used to characterize the degree of increase in wind speed with height at a site.

## SECTION 4- Significant Meteorological Events

There were no extreme metrological events in the period covered by this report. The highest wind speeds in the 16 months are less than 16 m/s as shown by the time series graph.

## SECTION 5 - Data Recovery and Validation

All raw wind data are subjected to a series of tests and filters to weed out data that are faulty or corrupted. Definitions of these quality assurance (QA) controls are given below under Test Definitions and Sensor Statistics. These control filters were designed to automate the quality control process and used many of the previous hand-worked data sets



made at UMass to affect a suitable emulation. The gross percentage of data recovered (ratio of the number of raw data points received to data points expected) and net percentage (ratio of raw data points which passed all QA control tests to data points expected) are shown below.

Gross Data Recovered [%]	90.7
Net Data Recovered [%]	89.1

### **Test Definitions**

All raw data were subjected to a series of validation tests, as described below. The sensors tested and the parameters specific to each sensor are given in the Sensor Performance Report that is included in APPENDIX A. Data that were flagged as invalid were not included in the statistics presented in this report.

**MinMax Test:** All sensors are expected to report data values within a range specified by the sensor and logger manufacturers. If a value falls outside this range, it is flagged as invalid. A data value from the sensor listed in Test Field 1 (TF1) is flagged if it is less than Factor 1 (F1) or greater than Factor 2. This test has been applied to the following sensors (as applicable): wind speed, wind speed standard deviation, wind direction, temperature, and solar insolation.

$$F1 > TF1 > F2$$

**MinMaxT Test:** This is a MinMax test for wind direction standard deviation with different ranges applied for high and low wind speeds. A wind direction standard deviation data value (TF1) is flagged either if it is less than Factor 1, if the wind speed (TF2) is less than Factor 4 and the wind direction standard deviation is greater than Factor 2, or if the wind speed is greater than or equal to Factor 4 and the wind direction standard deviation is greater than Factor 3.

$$\begin{aligned} & (TF1 < F1) \\ & \text{or } (TF2 < F4 \text{ and } TF1 > F2) \\ & \text{or } (TF2 \geq F4 \text{ and } TF1 > F3) \end{aligned}$$

**Icing Test:** An icing event occurs when ice collects on a sensor and degrades its performance. Icing events are characterized by the simultaneous measurements of near-zero standard deviation of wind direction, non-zero wind speed, and near- or below-freezing temperatures. Wind speed, wind speed standard deviation, wind direction, and wind direction standard deviation data values are flagged if the wind direction standard deviation (CF1) is less than or equal to Factor 1 (F1), the wind speed (TF1) is greater than Factor 2 (F2), and the temperature (CF2) is less than Factor 3 (F3). To exit an icing event, the wind direction standard deviation must be greater than Factor 4 (F4).

$$CF1 \leq F1 \text{ and } TF1 > F2 \text{ and } CF2 < F3$$

**CompareSensors Test:** Where primary and redundant sensors are used, it is possible to determine when one of the sensors is not performing properly. For anemometers, poor performance is characterized by low data values. Therefore, if one sensor of the pair reports values significantly below the other, the low values are flagged. At low wind speeds (Test Fields 1 and 2 less than or equal to Factor 3) wind speed data are flagged if the absolute difference between the two wind speeds is greater than Factor 1. At high wind speeds (Test Fields 1 or 2 greater than Factor 3) wind speed data are flagged if the absolute value of the ratio of the two wind speeds is greater is greater than Factor 2.

$$\begin{aligned} & [ TF1 \leq F3 \text{ and } TF2 \leq F3 \text{ and } \text{abs}(TF1 - TF2) > F1 ] \\ \text{or } & [ (TF1 > F3 \text{ or } TF2 > F3) \text{ and } (\text{abs}(1 - TF1 / TF2) > F2 \text{ or } \text{abs}(1 - TF2 / TF1) > F2) ] \end{aligned}$$

### Sensor Statistics

**Expected Data Points:** the total number of sample intervals between the start and end dates (inclusive).

**Actual Data Points:** the total number of data points recorded between the start and end dates.

**% Data Recovered:** the ratio of actual and expected data points (this is the *gross data recovered percentage*).

**Hours Out of Range:** total number of hours for which data were flagged according to MinMax and MinMaxT tests. These tests flag data, which fall outside of an expected range.

**Hours of Icing:** total number of hours for which data were flagged according to Icing tests. This test uses the standard deviation of wind direction, air temperature, and wind speed to determine when sensor icing has occurred.

**Hours of Fault:** total number of hours for which data were flagged according to CompareSensors tests. These tests compare two sensors (e.g. primary and redundant anemometers installed at the same height) and flag data points where one sensor differs significantly from the other.

**% Data Good:** the filter results are subtracted from the gross data recovery percentage to yield the *net data recovered percentage*.

## SECTION 6 - Data Summary

This report contains several types of wind data graphs. Unless otherwise noted, each graph represents data from the August, 2005 through July, 2006. Again, there is no data from December, 2005. The following graphs are included:

- Time Series – 10-minute average wind speeds at a height of 50 m are plotted against time. The wind speed time series is shown in Figure 2.
- Wind Speed Distribution – A histogram plot giving the percentage of time that the wind is at a given wind speed at a height of 50 m. The wind blows between 4-5 m/s for close to 22% of the time. The wind speed distribution is shown in Figure 3.
- Monthly Average – A plot of the monthly average wind speed at a height of 50 m from April 2005 - July 2006. This graph shows the trends in the wind speed over the year. The monthly average wind speed plot is shown in Figure 4. Data is missing from December 2005, when the logger was broken.
- Diurnal – A plot of the average wind speed for each hour of the day at a height of 50 m. The hourly mean wind speed high occurs between 1 pm and 2 pm and the low occurs between 5 am and 6 am. The diurnal variation plot is shown in Figure 5.
- Turbulence Intensity – A plot of turbulence intensity as a function of wind speed at a height of 50 m. Turbulence Intensity is calculated as the standard deviation of the wind speed divided by the wind speed and is a measure of the gustiness of a wind resource. Lower turbulence results in lower mechanical loads on a wind turbine. The turbulence intensity graph flattens out after 4 m/s. The turbulence intensity plot is shown in Figure 6.
- Wind Rose – A plot, by compass direction showing the percentage of time that the wind comes from a given direction and the average wind speed in that direction at a height of 50 m. The wind blew most frequently from the Southwest over the course of the year. The wind rose plot is shown in Figure 7.

## SECTION 7- Graphs

Data for the wind speed histograms, monthly and diurnal average plots, and wind roses are included in APPENDIX B.

### Wind Speed Time Series

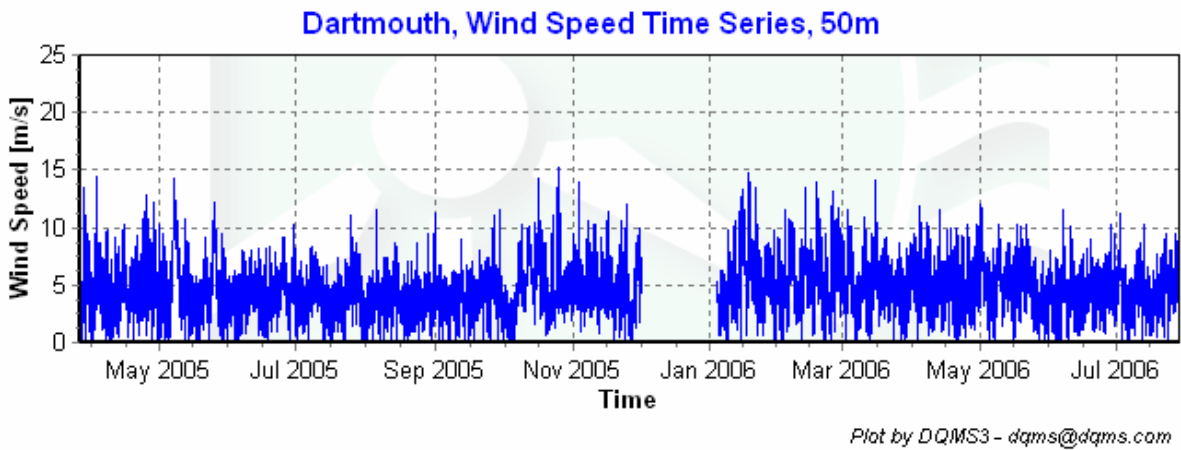


Figure 2 - Wind Speed Time Series, March 26, 2005 – July 31, 2006.

### Wind Speed Distributions

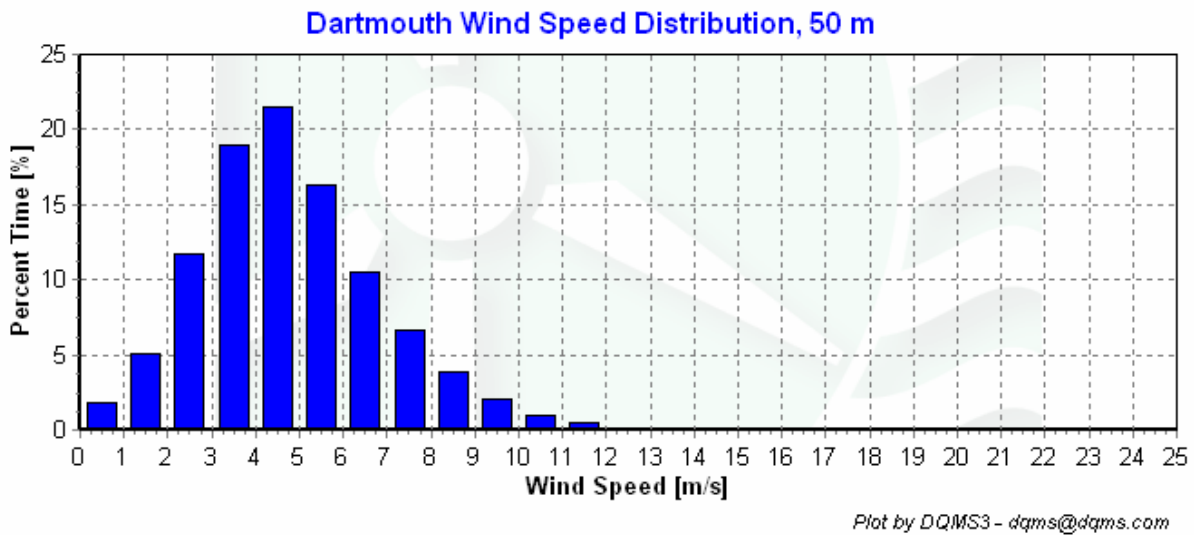


Figure 3 - Wind Speed Distribution, August 1, 2005 – July 31, 2006.

## Monthly Average Wind Speeds

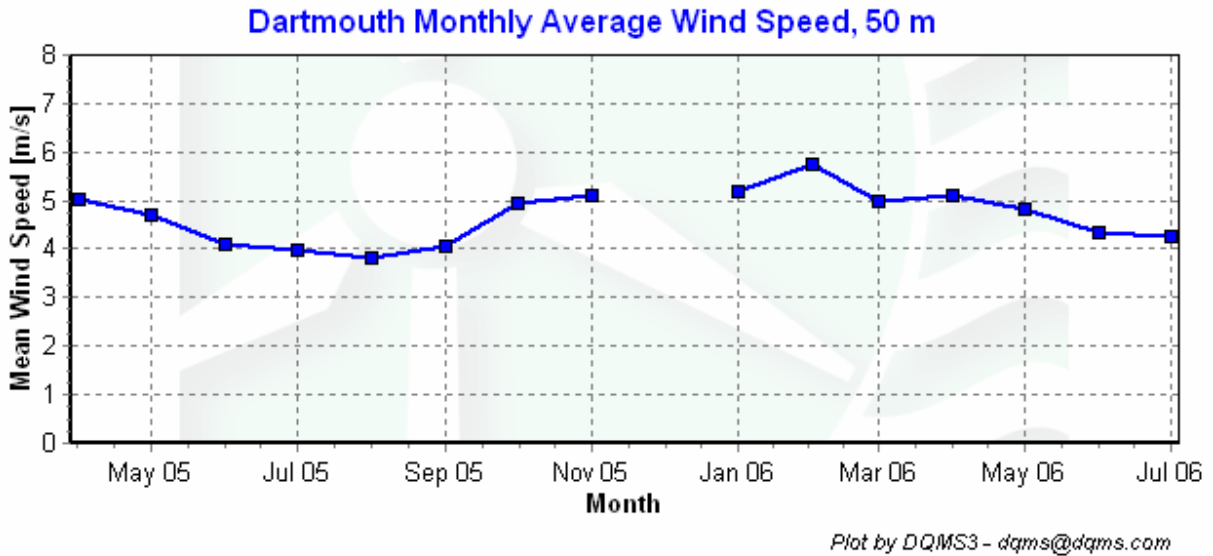


Figure 4 - Monthly Average Wind Speeds, April 1, 2005 – July 31, 2006.

## Diurnal Average Wind Speeds


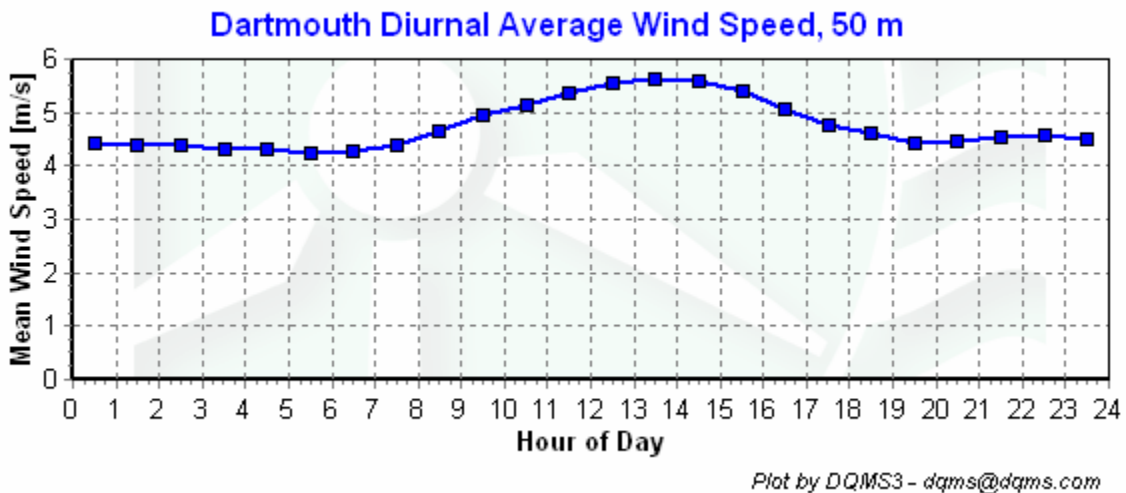


Figure 5 - Diurnal Wind Speed, August 1, 2005 – July 31, 2006.


## Turbulence Intensities

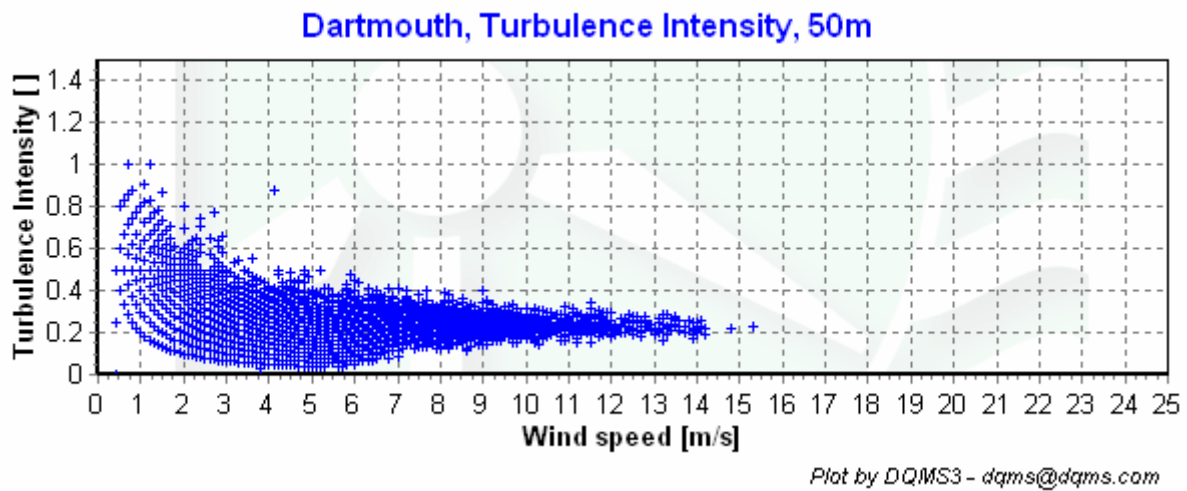

**Figure 6 - Turbulence Intensity vs. Wind Speed, August 1, 2005 – July 31, 2006.**

# Wind Rose

## Dartmouth Wind Rose, 50 m

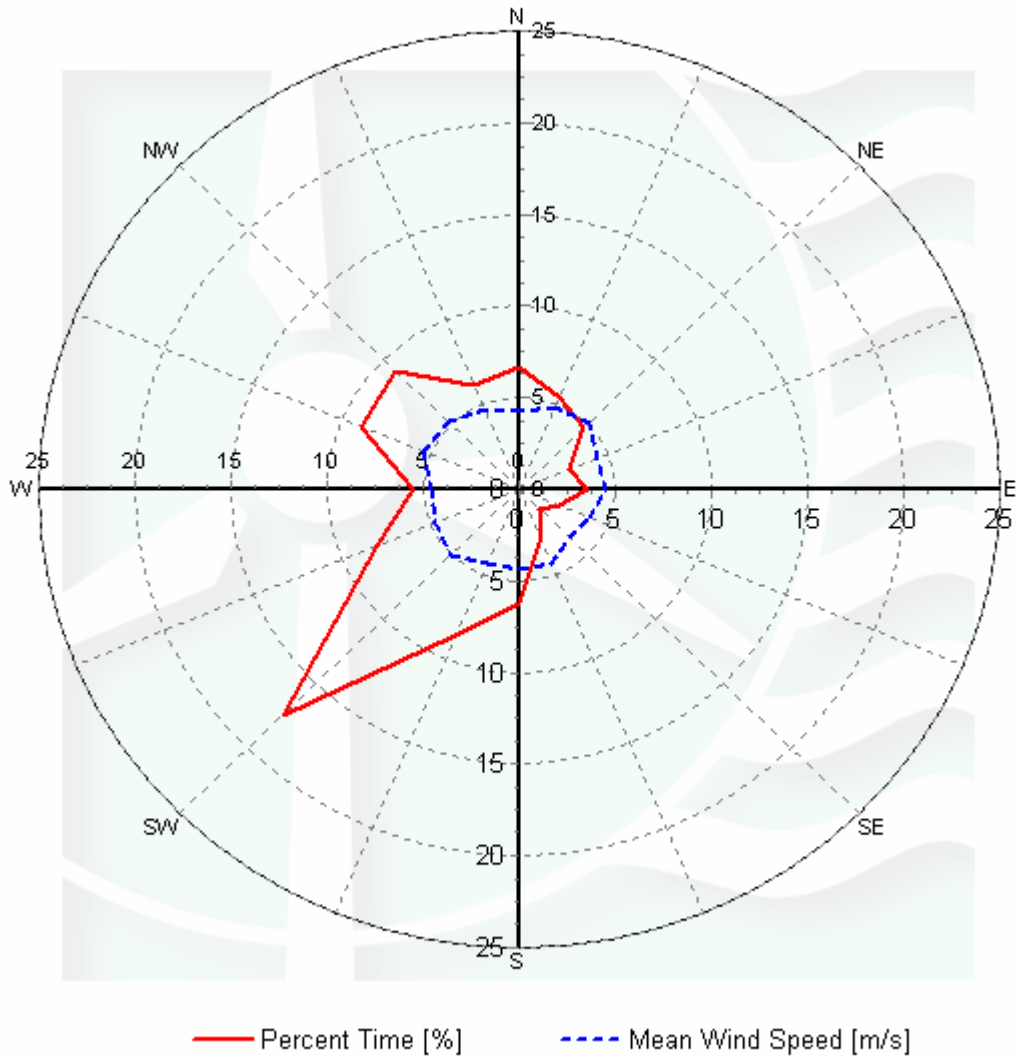

Plot by DQMS3 - dqms@dqms.com

**Figure 7 - Wind Rose, August 1, 2005 – July 31, 2006.**

# APPENDIX A – Sensor Performance Report

## Test Definitions

Test Order	TestField1	TestField2	TestField3	CalcField1	CalcField2	TestType	Factor1	Factor2	Factor3	Factor4
1						TimeTest Insert	0	0	0	0
2	Etmp2aDEGC					MinMax	-30	60	0	0
3	Etmx2aDEGC					MinMax	-30	60	0	0
4	Etmn2aDEGC					MinMax	-30	60	0	0
5	EtmpSD2aDEGC					MinMax	-30	60	0	0
10	Anem50aMS					MinMax	0	90	0	0
11	Anem50bMS					MinMax	0	90	0	0
12	Anem38aMS					MinMax	0	90	0	0
13	Anem38bMS					MinMax	0	90	0	0
14	Anem20aMS					MinMax	0	90	0	0
15	Anem50yMS					MinMax	0	90	0	0
16	Anem38yMS					MinMax	0	90	0	0
20	AnemSD50aMS					MinMax	0	4	0	0
21	AnemSD50bMS					MinMax	0	4	0	0
22	AnemSD38aMS					MinMax	0	4	0	0
23	AnemSD38bMS					MinMax	0	4	0	0
24	AnemSD20aMS					MinMax	0	4	0	0
25	AnemSD50yMS					MinMax	0	4	0	0
26	AnemSD38yMS					MinMax	0	4	0	0
30	Vane50aDEG					MinMax	0	359.9	0	0
31	Vane38aDEG					MinMax	0	359.9	0	0
32	Vane20aDEG					MinMax	0	359.9	0	0
50	Turb50zNONE					MinMax	0	2	0	0
51	Turb38zNONE					MinMax	0	2	0	0
60	Wshr0zNONE					MinMax	-100	100	0	0
70	Pwrd50zWMS					MinMax	0	5000	0	0
71	Pwrd38zWMS					MinMax	0	5000	0	0
200	VaneSD50aDEG	Anem50yMS				MinMaxT	0	100	100	10
201	VaneSD38aDEG	Anem38yMS				MinMaxT	0	100	100	10
202	VaneSD20aDEG	Anem20aMS				MinMax	0	100	100	10
300	Anem50aMS	AnemSD50aMS	Vane50aDEG	VaneSD50aDEG	Etmp2aDEGC	Icing	0.5	1	2	10
301	Anem50bMS	AnemSD50bMS	Vane50aDEG	VaneSD50aDEG	Etmp2aDEGC	Icing	0.5	1	2	10
302	Anem38aMS	AnemSD38aMS	Vane38aDEG	VaneSD38aDEG	Etmp2aDEGC	Icing	0.5	1	2	10
303	Anem38bMS	AnemSD38bMS	Vane38aDEG	VaneSD38aDEG	Etmp2aDEGC	Icing	0.5	1	2	10
304	Anem20aMS	AnemSD20aMS	Vane20aDEG	VaneSD20aDEG	Etmp2aDEGC	Icing	0.5	1	2	10
400	Anem50aMS	Anem50bMS				CompareSensors	1	0.25	3	0
401	Anem38aMS	Anem38bMS				CompareSensors	1	0.25	3	0



500	Amax50aMS					MinMax	0	90	0	0
501	Amax50bMS					MinMax	0	90	0	0
502	Amax38aMS					MinMax	0	90	0	0
503	Amax38bMS					MinMax	0	90	0	0
504	Amax20aMS					MinMax	0	90	0	0
510	Amin50aMS					MinMax	0	90	0	0
511	Amin50bMS					MinMax	0	90	0	0
512	Amin38aMS					MinMax	0	90	0	0
513	Amin38bMS					MinMax	0	90	0	0
514	Amin20aMS					MinMax	0	90	0	0
520	Vmax50aDEG					MinMax	0	359.9	0	0
521	Vmax38aDEG					MinMax	0	359.9	0	0
522	Vmax20aDEG					MinMax	0	359.9	0	0
530	Vmin50aDEG					MinMax	0	359.9	0	0
531	Vmin38aDEG					MinMax	0	359.9	0	0
532	Vmin20aDEG					MinMax	0	359.9	0	0

### Sensor Statistics

Sensors	Expected Data Points	Actual Data Points	% Data Recovered	Hours Out of Range	Hours of Icing	Hours of Fault	% Data Good
Anem50aMS	52560	47649	90.656	0.167	167.5	0	88.742
AnemSD50aMS	52560	47649	90.656	0.167	167.5	0	88.742
Anem50bMS	52560	47649	90.656	0.167	161.667	0.167	88.807
AnemSD50bMS	52560	47649	90.656	0.167	161.667	0.167	88.807
Anem38aMS	52560	47649	90.656	0	150.167	28.833	88.613
AnemSD38aMS	52560	47649	90.656	0	150.167	28.833	88.613
Anem38bMS	52560	47649	90.656	0	187	1.833	88.501
AnemSD38bMS	52560	47649	90.656	0	187	1.833	88.501
Anem20aMS	52560	47649	90.656	0	95.167	0	89.57
AnemSD20aMS	52560	47649	90.656	0	95.167	0	89.57
Vane50aDEG	52560	47649	90.656	2.333	167.5	0	88.718
VaneSD50aDEG	52560	47649	90.656	2.333	167.5	0	88.718
Vane38aDEG	52560	47649	90.656	3.333	189.333	0	88.457
VaneSD38aDEG	52560	47649	90.656	3.333	189.333	0	88.457
Vane20aDEG	52560	47649	90.656	3.5	95.167	0	89.53
VaneSD20aDEG	52560	47649	90.656	3.5	95.167	0	89.53
Etmp2aDEGC	52560	47649	90.656	0	0	0	90.656
EtmpSD2aDEGC	52560	47649	90.656	0	0	0	90.656
<b>Total</b>	<b>946080</b>	<b>857682</b>	<b>90.656</b>	<b>19</b>	<b>2427</b>	<b>61.667</b>	<b>89.066</b>

## APPENDIX B - Plot Data

### Wind Speed Distribution Data

Bin Center Wind Speed [m/s]	Percent of Time [%]
0.5	1.76
1.5	5.03
2.5	11.69
3.5	18.91
4.5	21.51
5.5	16.32
6.5	10.48
7.5	6.64
8.5	3.82
9.5	2.09
10.5	0.96
11.5	0.47
12.5	0.17
13.5	0.12
14.5	0.03
15.5	0
16.5	0
17.5	0
18.5	0
19.5	0
20.5	0
21.5	0
22.5	0
23.5	0
24.5	0

Table 1 - Wind Speed Distribution, August 1, 2005 – July 31, 2006.

### Monthly Average Wind Speed Data

Date	10 min Mean [m/s]
Apr-05	5.04
May-05	4.7
Jun-05	4.1
Jul-05	3.98
Aug-05	3.82
Sep-05	4.04
Oct-05	4.96
Nov-05	5.1
Dec-05	-
Jan-06	5.2
Feb-06	5.73

Mar-06	4.97
Apr-06	5.12
May-06	4.83
Jun-06	4.33
Jul-06	4.27

**Table 2 - Wind Speed Averages, 50m**

**Diurnal Average Wind Speed Data**

Hour of Day	Average Wind Speed [m/s]
0.5	4.44
1.5	4.40
2.5	4.37
3.5	4.29
4.5	4.31
5.5	4.25
6.5	4.28
7.5	4.39
8.5	4.64
9.5	4.94
10.5	5.15
11.5	5.38
12.5	5.55
13.5	5.63
14.5	5.57
15.5	5.40
16.5	5.05
17.5	4.75
18.5	4.62
19.5	4.43
20.5	4.44
21.5	4.53
22.5	4.58
23.5	4.52

**Table 3 - Diurnal Average Wind Speeds, August 1, 2005 – July 31, 2006.**

### Wind Rose Data

<b>Direction</b>	<b>Percent Time [%], 50 m</b>	<b>Mean Wind Speed [m/s], 50 m</b>
<b>N</b>	6.68	4.27
<b>NNE</b>	5.46	4.81
<b>NE</b>	4.75	5.11
<b>ENE</b>	2.87	4.36
<b>E</b>	3.56	4.47
<b>ESE</b>	2.24	3.93
<b>SE</b>	1.50	3.68
<b>SSE</b>	2.89	4.32
<b>S</b>	6.22	4.34
<b>SSW</b>	8.65	4.37
<b>SW</b>	17.42	5.03
<b>WSW</b>	7.96	4.79
<b>W</b>	5.56	4.58
<b>WNW</b>	8.89	5.45
<b>NW</b>	9.16	5.20
<b>NNW</b>	6.18	4.73

**Table 4 - Wind Rose, Time Percentage and Mean Wind Speed by Direction,  
August 1, 2005 – July 31, 2006.**