

WIND DATA REPORT

Mattapoissett, Massachusetts

June 1, 2006 - August 31, 2006

Prepared for

Massachusetts Technology Collaborative
75 North Drive
Westborough, MA 01581

by

Samuel A. Johnston
William L.W. Henson
James F. Manwell
Anthony L. Rogers
Anthony F. Ellis

October 16, 2006

Report template version 2.0

Renewable Energy Research Laboratory
University of Massachusetts, Amherst
160 Governors Drive, Amherst, MA 01003

www.ceere.org/rerl • (413) 545-4359 • rerl@ecs.umass.edu



NOTICE AND ACKNOWLEDGEMENTS

This report was prepared by the Renewable Energy Research Laboratory (RERL) at the University of Massachusetts, Amherst in the course of performing work sponsored by the Renewable Energy Trust (RET), as administered by the Massachusetts Technology Collaborative (MTC), pursuant to work order number 05-1. The opinions expressed in this report do not necessarily reflect those of MTC or the Commonwealth of Massachusetts, and reference to any specific product, service, process, or method does not constitute an implied or expressed recommendation or endorsement of it.

Further, MTC, the Commonwealth of Massachusetts, and RERL make no warranties or representations, expressed or implied, as to the fitness for particular purpose or merchantability of any product, apparatus, or service, or the usefulness, completeness, or accuracy of any processes, methods or other information contained, described, disclosed, or referred to in this report. MTC, the Commonwealth of Massachusetts, and the contractor make no representation that the use of any product, apparatus, process, method, or other information will not infringe privately owned rights and will assume no liability for any loss, injury, or damage directly or indirectly resulting from, or occurring in connection with, the use of information contained, described, disclosed, or referred to in this report.

TABLE OF CONTENTS

Notice and Acknowledgements	1
Table of Contents	2
Table of Figures	3
Executive Summary	4
SECTION 1 - Instrumentation and Equipment.....	6
SECTION 2 - Data Collection and Maintenance.....	6
SECTION 3 - Significant Meteorological Events	8
SECTION 4 - Data Recovery and Validation.....	8
Test Definitions.....	8
Sensor Statistics	9
SECTION 5 - Data Summary	10
SECTION 6 - Graphs.....	12
Wind Speed Time Series.....	12
Wind Speed Distributions	13
Monthly Average Wind Speeds	13
Diurnal Average Wind Speeds.....	14
Turbulence Intensities.....	15
Wind Roses	16
APPENDIX A - Sensor Performance Report	17
Test Definitions.....	17
Sensor Statistics	19
APPENDIX B - Plot Data.....	20
Wind Speed Distribution Data	20
Monthly Average Wind Speed Data	20
Diurnal Average Wind Speed Data.....	21
Wind Rose Data	22

TABLE OF FIGURES

Figure 1 Topographic Map Showing Mattapoisett Site Location--Source Topozone.com.....	5
Figure 2 – Wind Speed Time Series, June 1, 2006 through August 31, 2006.....	12
Figure 3 – Wind Speed Distribution, June 1, 2006 through August 31, 2006.....	13
Figure 4 – Monthly Average Wind Speed.....	13
Figure 5 – Diurnal Average Wind Speed, June 1, 2006 through August 31, 2006.....	14
Figure 6 – Turbulence Intensity, June 1, 2006 through August 31, 2006.....	15
Figure 7 – Wind Rose, June 1, 2006 through August 31, 2006.....	16

EXECUTIVE SUMMARY

All of the work presented in this Wind Data Report including installation and decommissioning of the meteorological tower and instrumentation, and the data analysis and reporting was performed by the Renewable Energy Research Laboratory (RERL) at the University of Massachusetts, Amherst.

This report covers wind data measured at a meteorological tower installed near the South Shore Marshes Wildlife Management Area in the town of Mattapoisett, MA (Figure 1). Installed on January 20th, 2006, the wind monitoring station has been in continuous operation to this day. Two sets of two anemometers and one wind vane are mounted at 49 m (160.8 ft) and 38 m (124.7 ft), and an additional anemometer and vane are mounted at 20 m (65.6 ft). Reports are made on a quarterly basis; and this report is the third such report for Mattapoisett.

The season covered by this report is June 2006 – August 2006 (Summer quarter). Statistics for the available dataset (June 1—August 31) are presented in this report. The mean recorded wind speed for this period was 5.25 m/s (11.74 mph)¹ and the prevailing wind direction was from the SSW. The gross data recovery percentage (the actual percentage of expected data received) was 100% and the net data recovery percentage (the percentage of expected data which passed all of the quality assurance tests) was 99.86%.

Additional information about interpreting the data presented in this report can be found in the Fact Sheet, “Interpreting Your Wind Resource Data,” produced by RERL and the Massachusetts Technology Collaborative (MTC). This document is found through the RERL website:

http://www.ceere.org/rerl/about_wind/RERL_Fact_Sheet_6_Wind_resource_interpretation.pdf

¹ 1m/s=2.237 mph

- Station Location

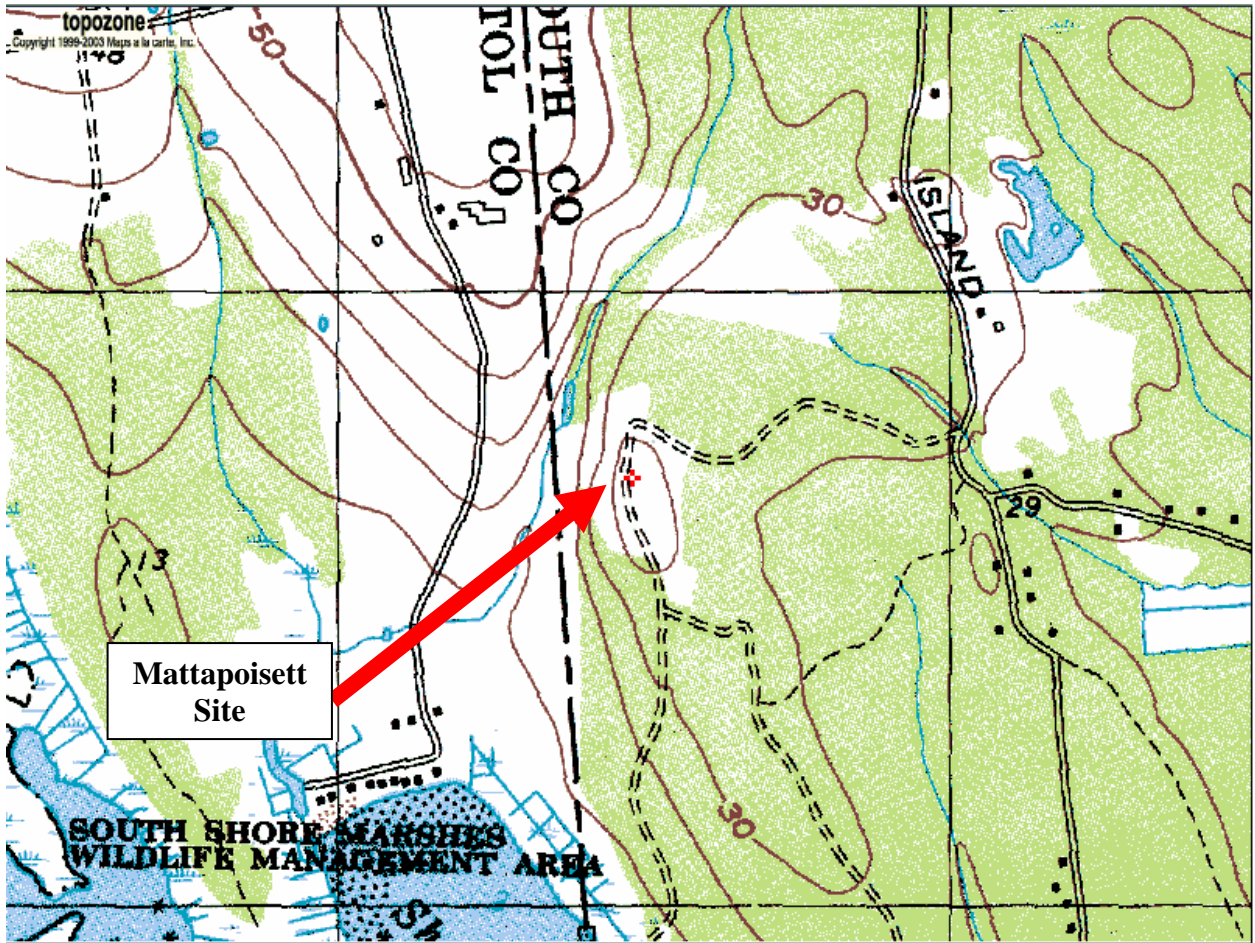


Figure 1 Topographic Map Showing Mattapoissett Site Location--Source Topozone.com

The Mattapoissett site is located near the South Shore Marshes Wildlife Management Area in Mattapoissett, MA. Latitude and Longitude are $41^{\circ} 38.11'N$ and $70^{\circ} 50.55'W$, respectively, using the NAD 83 datum.

SECTION 1 - Instrumentation and Equipment

The wind monitoring equipment is mounted on a 49 m (164.0 ft) NRG tower. All other monitoring equipment comes from NRG Systems, and consists of the following items:

- Symphonie Data Logger
- Electrical enclosure box
- 5 – #40 Anemometers, standard calibration (Slope - 0.765 m/s, Offset – 0.349 m/s). Two anemometers are located at 49 m (160.8 ft), two at 38 m (124.7 ft) and one at a height of 20 m (65.6 ft).
- 3 - #200P Wind direction vanes. They are located at heights of 49 m (160.8 ft), 38 m (124.7 ft) and 20 m (65.6 ft) each.
- 5 – Sensor booms, 54” length
- Lightning rod and grounding cable
- Shielded sensor wire

The data from the Symphonie logger is mailed to the Renewable Energy Research Laboratory at the University of Massachusetts, Amherst on a regular basis. The logger samples wind speed and direction once every two seconds. These data are then combined into 10-minute averages and, along with the standard deviation for those 10-minute periods, are put into a binary file. These binary files are converted to ASCII text files using the NRG software BaseStation®. These text files are then imported into a database software program where they are subjected to quality assurance (QA) tests prior to using the data.

SECTION 2 - Data Collection and Maintenance

There were no maintenance/equipment problems that occurred during the report period.

Data Statistics Summary

Date	Mean Wind Speed	Max Wind Speed	Turbulence Intensity	Prevailing Wind Direction	Mean Wind Speed	Max Wind Speed	Turbulence Intensity	Prevailing Wind Direction	Mean Wind Speed	Max Wind Speed	Turbulence Intensity	Prevailing Wind Direction	Wind Shear Coefficient
Height units	49 m, [m/s]	49 m, [m/s]	49 m, []	49 m, []	38 m, [m/s]	38 m, [m/s]	38 m, []	38 m, []	20 m, [m/s]	20 m, [m/s]	20 m, []	20 m, []	49m - 38m []
June 2006	5.42	14.3	0.16	SSW	4.90	12.9	0.20	SSW	3.51	9.00	0.3	SSW	0.41
July 2006	5.50	14.1	0.15	SSW	5.07	12.9	0.18	SSW	3.45	8.6	0.3	SSW	0.36
August 2006	4.84	14.1	0.17	SSW	4.39	13.1	0.19	SSW	3.02	8.2	0.3	SSW	0.39
June '06 – August '06	5.25	14.6	0.16	SSW	4.79	13.1	0.19	SSW	3.33	9	0.3	SSW	0.39

Wind data statistics in the table are reported when more than 90% of the data during the reporting period are valid.

No measurement of wind speed can be perfectly accurate. Errors occur due to anemometer manufacturing variability, anemometer calibration errors, the response of anemometers to turbulence and vertical airflow and due to airflows caused by the anemometer mounting system. Every effort is made to reduce the sources of these errors. Nevertheless, the values reported in this report have an expected uncertainty of about $\pm 2\%$ or ± 0.2 m/s, whichever is greater.

When data at multiple heights are available, shear coefficients, α , have been determined—in this case from the anemometry located at 49 m and 38 m. They can be used in the following formula to estimate the average wind speed, $U(z)$, at height z , when the average wind speed, $U(z_r)$, at height z_r is known:

$$U(z) = U(z_r) \left(\frac{z}{z_r} \right)^\alpha$$

The change in wind speed with height is a very complicated relationship related to atmospheric conditions, wind speed, wind direction, time of day and time of year. This formula may not provide the correct answer at any given site. Nevertheless the calculated shear coefficient, based on measurements at two heights, can be used to characterize the degree of increase in wind speed with height at a site.

SECTION 3 - Significant Meteorological Events

The Summer of 2006 had no major meteorological events that would have caused notable fluctuations in wind speed measurements.

Source:

http://www.wunderground.com/history/airport/KEWB/2006/6/1/CustomHistory.html?dayend=31&monthend=8&yearend=2006&req_city=NA&req_state=NA&req_statename=NA

SECTION 4 - Data Recovery and Validation

All raw wind data are subjected to a series of tests and filters to weed out data that are faulty or corrupted. Definitions of these quality assurance (QA) controls are given below under Test Definitions and Sensor Statistics. These control filters were designed to automate the quality control process and used many of the previous hand-worked data sets made at UMass to affect a suitable emulation. The gross percentage of data recovered (ratio of the number of raw data points received to data points expected) and net percentage (ratio of raw data points which passed all QA control tests to data points expected) are shown below.

Gross Data Recovered [%]	100%
Net Data Recovered [%]	99.86%

Test Definitions

All raw data were subjected to a series of validation tests, as described below. The sensors tested and the parameters specific to each sensor are given in the Sensor Performance Report, which is included in APPENDIX A. Data that were flagged as invalid were not included in the statistics presented in this report.

MinMax Test: All sensors are expected to report data values within a range specified by the sensor and logger manufacturers. If a value falls outside this range, it is flagged as invalid. A data value from the sensor listed in Test Field 1 (TF1) is flagged if it is less than Factor 1 (F1) or greater than Factor 2. This test has been applied to the following sensors (as applicable): wind speed, wind speed standard deviation, wind direction, temperature, and solar insolation.

$$F1 > TF1 > F2$$

MinMaxT Test: This is a MinMax test for wind direction standard deviation with different ranges applied for high and low wind speeds. A wind direction standard deviation data value (TF1) is flagged either if it is less than Factor 1, if the wind speed

(TF2) is less than Factor 4 and the wind direction standard deviation is greater than Factor 2, or if the wind speed is greater than or equal to Factor 4 and the wind direction standard deviation is greater than Factor 3.

$$\begin{aligned} & (\text{TF1} < \text{F1}) \\ & \text{or } (\text{TF2} < \text{F4} \text{ and } \text{TF1} > \text{F2}) \\ & \text{or } (\text{TF2} \geq \text{F4} \text{ and } \text{TF1} > \text{F3}) \end{aligned}$$

Icing Test: An icing event occurs when ice collects on a sensor and degrades its performance. Icing events are characterized by the simultaneous measurements of near-zero standard deviation of wind direction, non-zero wind speed, and near- or below-freezing temperatures. Wind speed, wind speed standard deviation, wind direction, and wind direction standard deviation data values are flagged if the wind direction standard deviation (CF1) is less than or equal to Factor 1 (F1), the wind speed (TF1) is greater than Factor 2 (F2), and the temperature (CF2) is less than Factor 3 (F3). To exit an icing event, the wind direction standard deviation must be greater than Factor 4 (F4).

$$\text{CF1} \leq \text{F1} \text{ and } \text{TF1} > \text{F2} \text{ and } \text{CF2} < \text{F3}$$

CompareSensors Test: Where primary and redundant sensors are used, it is possible to determine when one of the sensors is not performing properly. For anemometers, poor performance is characterized by low data values. Therefore, if one sensor of the pair reports values significantly below the other, the low values are flagged. At low wind speeds (Test Fields 1 and 2 less than or equal to Factor 3) wind speed data are flagged if the absolute difference between the two wind speeds is greater than Factor 1. At high wind speeds (Test Fields 1 or 2 greater than Factor 3) wind speed data are flagged if the absolute value of the ratio of the two wind speeds is greater is greater than Factor 2.

$$\begin{aligned} & [\text{TF1} \leq \text{F3} \text{ and } \text{TF2} \leq \text{F3} \text{ and } \text{abs}(\text{TF1} - \text{TF2}) > \text{F1}] \\ & \text{or } [(\text{TF1} > \text{F3} \text{ or } \text{TF2} > \text{F3}) \text{ and } (\text{abs}(1 - \text{TF1} / \text{TF2}) > \text{F2} \text{ or } \text{abs}(1 - \text{TF2} / \text{TF1}) > \text{F2})] \end{aligned}$$

Sensor Statistics

Expected Data Points: the total number of sample intervals between the start and end dates (inclusive).

Actual Data Points: the total number of data points recorded between the start and end dates.

% Data Recovered: the ratio of actual and expected data points (this is the *gross data recovered percentage*).

Hours Out of Range: total number of hours for which data were flagged according to MinMax and MinMaxT tests. These tests flag data that fall outside of an expected range.

Hours of Icing: total number of hours for which data were flagged according to Icing tests. This test uses the standard deviation of wind direction, air temperature, and wind speed to determine when sensor icing has occurred.

Hours of Fault: total number of hours for which data were flagged according to CompareSensors tests. These tests compare two sensors (e.g. primary and redundant anemometers installed at the same height) and flag data points where one sensor differs significantly from the other.

% Data Good: the filter results are subtracted from the gross data recovery percentage to yield the *net data recovered percentage*.

SECTION 5 - Data Summary

This report contains several types of wind data graphs. Unless otherwise noted, each graph represents data from 1 quarter (3 months). The following graphs are included:

- Time Series – 10-minute average wind speeds are plotted against time for all Summer quarter data (i.e. June 1, 2006 to August 31, 2006) in Figure 2. This plot presents data at 49 meters.
- Wind Speed Distribution – A histogram plot giving the percentage of time that the wind is at a given wind speed. Figure 3 shows that the wind speeds ranged between 4 m/s and 5 m/s (8.95 mph and 13.42 mph) more than 15% of the time. This plot presents data at 49 meters and is drawn from the entire Summer quarter dataset.
- Monthly Average Wind Speeds – This plot shows the trends in the mean monthly wind speed at a height of 49 m. This graph shows the trends in the wind speed over the year. The monthly average wind speed plot is shown in Figure 4. As can be seen in the figure, to date, the monthly average wind speed is roughly 5.5 m/s (12.30 mph).
- Diurnal – A plot of the average wind speed for each hour of the day. Figure 5 shows that the hourly average varied between 4.5 m/s and 6 m/s (10.06 mph and 15.66 mph), with the highest average speeds in the afternoon. This plot presents data at 49 meters and is drawn from the entire Summer quarter dataset.
- Turbulence Intensity – A plot of turbulence intensity as a function of wind speed. Turbulence Intensity is calculated as the standard deviation of the wind speed divided by the wind speed and is a measure of the gustiness of a wind resource. Lower turbulence results in lower mechanical loads on a wind turbine. In general, turbulence intensities range from 0.1 to 0.4; for Mattapoisett, the average

turbulence intensity for the Summer quarter was 0.19. Figure 6 presents data at 49 meters and is drawn from the entire Summer quarter dataset.

- Wind Rose – A plot, by compass direction showing the percentage of time that the wind comes from a given direction and the average wind speed in that direction. Figure 7 shows the prevailing direction is from the south-southwest. The wind blew from the SSW 23.4% of the time with a mean wind speed of 6.25 m/s (13.98mph). This plot presents data at 49 meters and is drawn from the entire Summer quarter dataset.

SECTION 6- Graphs

Data for the wind speed histograms, monthly and diurnal average plots, and wind roses are included in APPENDIX B.

Wind Speed Time Series

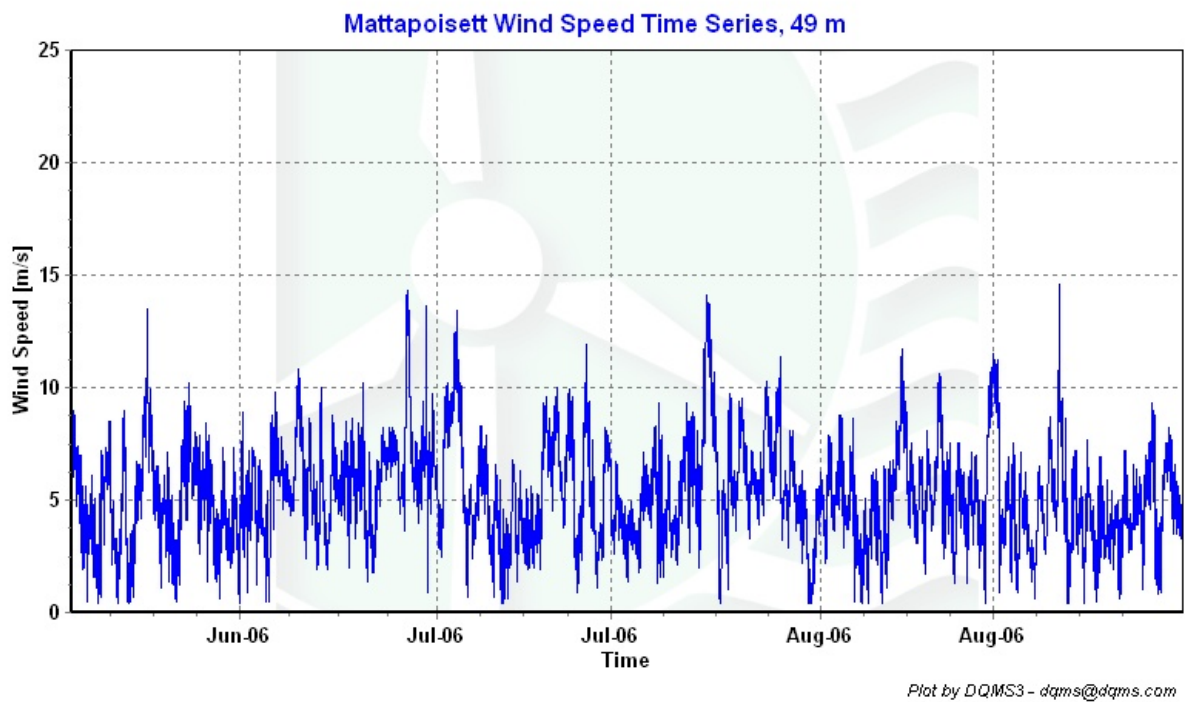


Figure 2 – Wind Speed Time Series, June 1, 2006 through August 31, 2006

Wind Speed Distributions

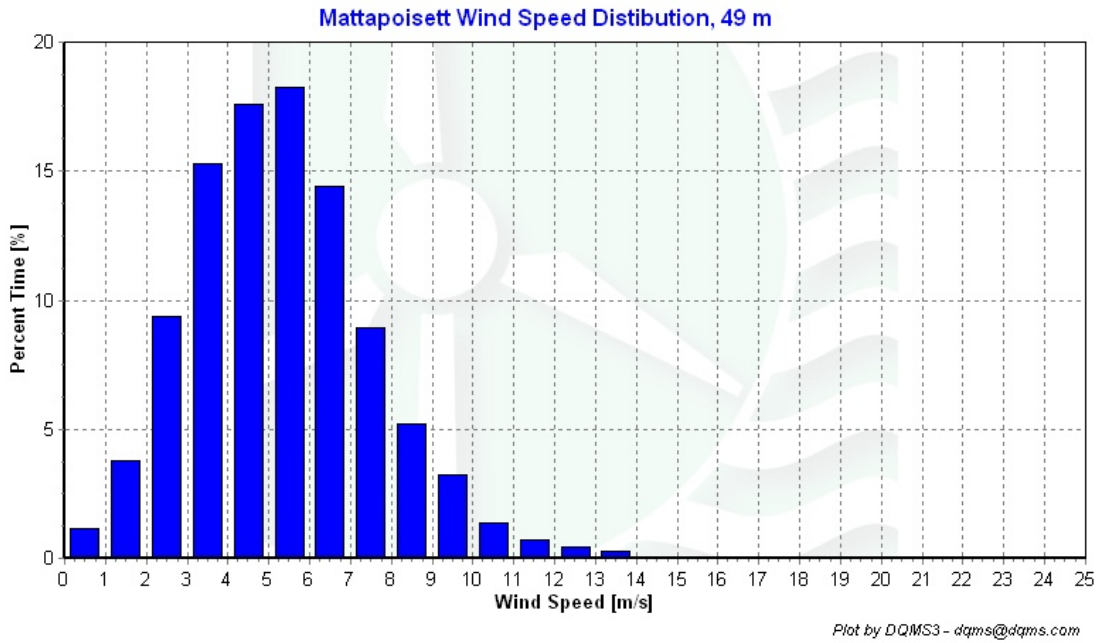


Figure 3 – Wind Speed Distribution, June 1, 2006 through August 31, 2006

Monthly Average Wind Speeds

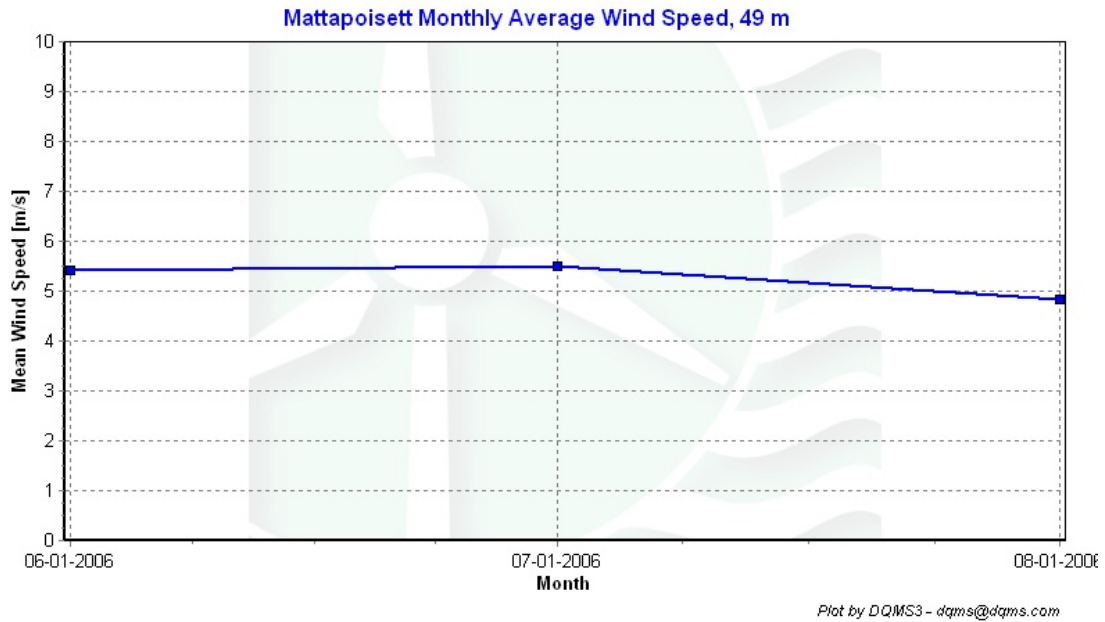


Figure 4 – Monthly Average Wind Speed
Diurnal Average Wind Speeds

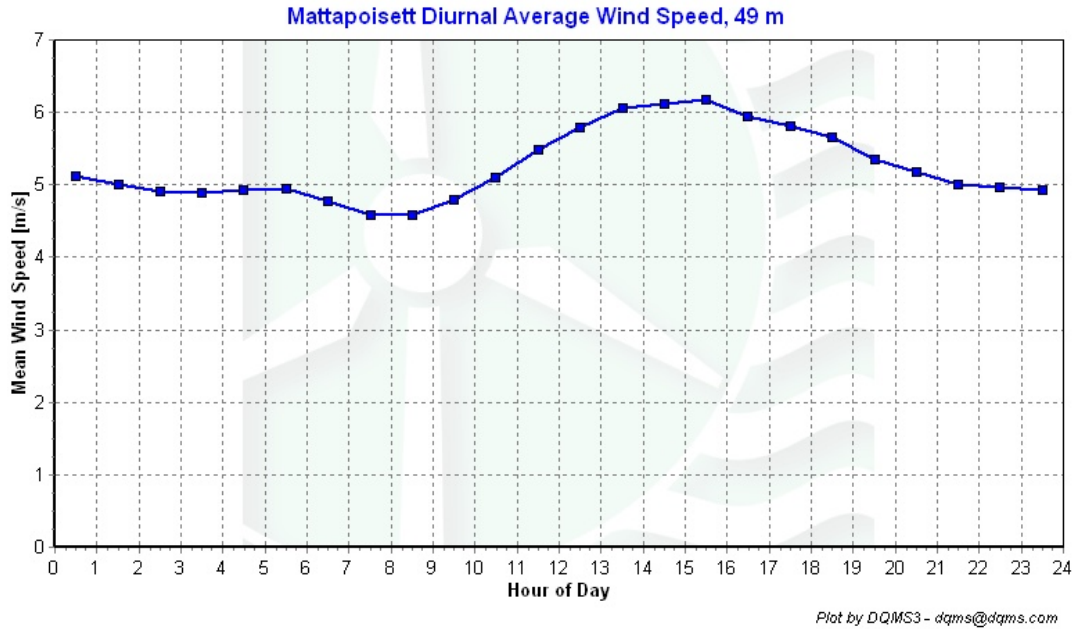


Figure 5 – Diurnal Average Wind Speed, June 1, 2006 through August 31, 2006

Turbulence Intensities


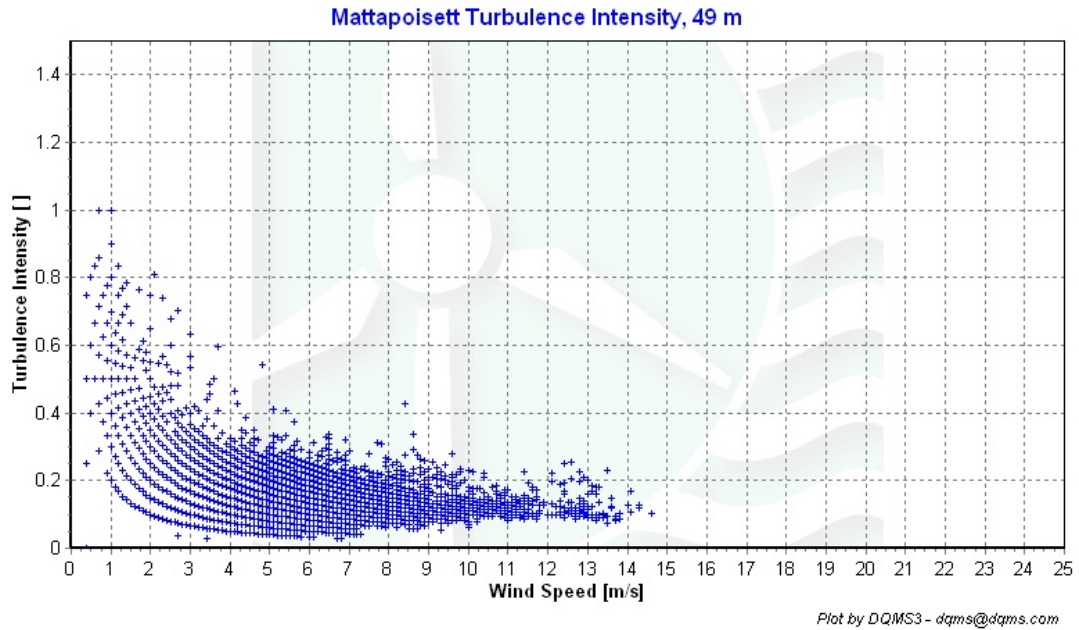


Figure 6 – Turbulence Intensity, June 1, 2006 through August 31, 2006

Wind Roses

Mattapoissett Wind Rose, 49 m

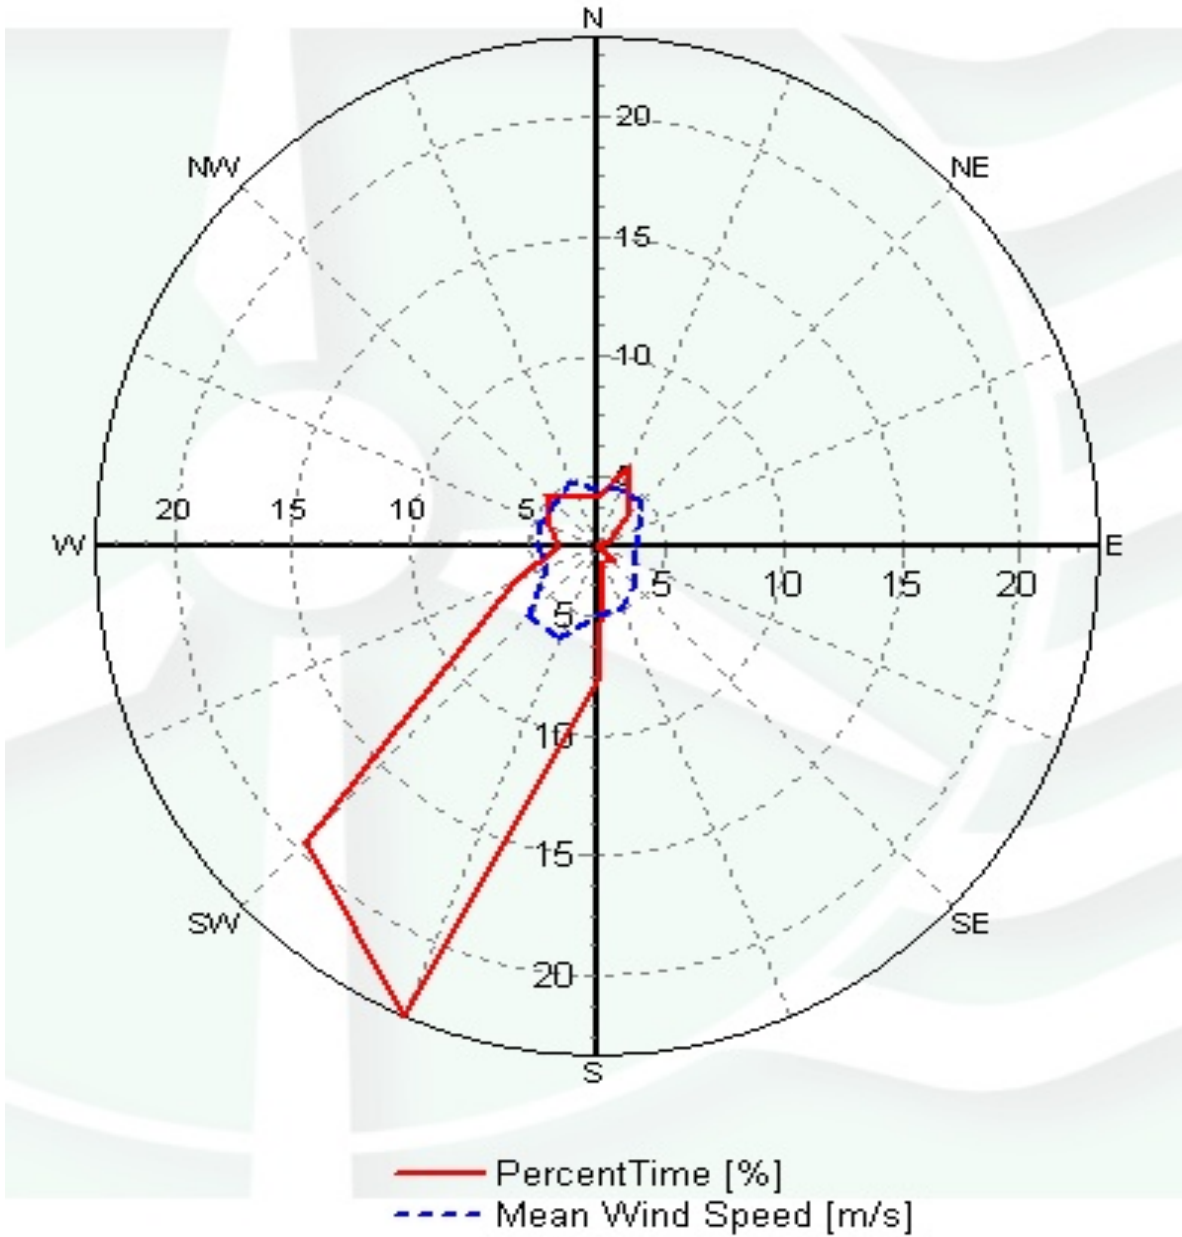

Plot by DQMS3 - dqms@dqms.com

Figure 7 – Wind Rose, June 1, 2006 through August 31, 2006

APPENDIX A - Sensor Performance Report

Test Definitions

TestOrder	TestField 1	TestField 2	TestField 3	CalcField 1	CalcField 2	CalcField 3	TestType	Factor1	Factor2	Factor3	Factor4
1							TimeTest Insert	0	0	0	0
2	Etmp2aD EGC						MinMax	-30	60	0	0
3	Etmx2aD EGC						MinMax	-30	60	0	0
4	Etmn2aD EGC						MinMax	-30	60	0	0
5	EtmpSD2 aDEGC						MinMax	-30	60	0	0
10	Anem50a MS						MinMax	0	90	0	0
11	Anem50b MS						MinMax	0	90	0	0
12	Anem38a MS						MinMax	0	90	0	0
13	Anem38b MS						MinMax	0	90	0	0
14	Anem20a MS						MinMax	0	90	0	0
20	AnemSD 50aMS						MinMax	0	4	0	0
21	AnemSD 50bMS						MinMax	0	4	0	0
22	AnemSD 38aMS						MinMax	0	4	0	0
23	AnemSD 38bMS						MinMax	0	4	0	0
24	AnemSD 20aMS						MinMax	0	4	0	0
30	Vane50a DEG						MinMax	0	359.9	0	0
31	Vane38a DEG						MinMax	0	359.9	0	0
32	Vane20a DEG						MinMax	0	359.9	0	0
50	Turb50zN ONE						MinMax	0	2	0	0
51	Turb38zN ONE						MinMax	0	2	0	0
52	Turb20zN ONE						MinMax	0	2	0	0
60	Wshr0zN ONE						MinMax	-100	100	0	0
200	VaneSD5 0aDEG	Anem50y MS					MinMaxT	0	100	100	10
201	VaneSD3 8aDEG	Anem38y MS					MinMaxT	0	100	100	10
202	VaneSD2 0aDEG	Anem20a MS					MinMaxT	0	100	100	10
300	Anem50a MS	AnemSD 50aMS	Vane50a DEG	VaneSD5 0aDEG	Etmp2aD EGC		Icing	0.5	1	2	10
301	Anem50b MS	AnemSD 50bMS	Vane50a DEG	VaneSD5 0aDEG	Etmp2aD EGC		Icing	0.5	1	2	10
302	Anem38a MS	AnemSD 38aMS	Vane38a DEG	VaneSD3 8aDEG	Etmp2aD EGC		Icing	0.5	1	2	10

303	Anem38b MS	AnemSD 38bMS	Vane38a DEG	VaneSD3 8aDEG	Etmp2aD EGC		Icing	0.5	1	2	10
304	Anem20a MS	AnemSD 20aMS	Vane20a DEG	VaneSD2 0aDEG	Etmp2aD EGC		Icing	0.5	1	2	10
400	Anem50a MS	Anem50b MS					Compare Sensors	1	0.25	3	0
401	Anem38a MS	Anem38b MS					Compare Sensors	1	0.25	3	0
500	Amax50a MS						MinMax	0	90	0	0
501	Amax50b MS						MinMax	0	90	0	0
502	Amax38a MS						MinMax	0	90	0	0
503	Amax38b MS						MinMax	0	90	0	0
504	Amax20a MS						MinMax	0	90	0	0
510	Amin50a MS						MinMax	0	90	0	0
511	Amin50b MS						MinMax	0	90	0	0
512	Amin38a MS						MinMax	0	90	0	0
513	Amin38b MS						MinMax	0	90	0	0
514	Amin20a MS						MinMax	0	90	0	0
520	Vmax50a DEG						MinMax	0	359.9	0	0
521	Vmax38a DEG						MinMax	0	359.9	0	0
522	Vmax20a DEG						MinMax	0	359.9	0	0
530	Vmin50a DEG						MinMax	0	359.9	0	0
531	Vmin38a DEG						MinMax	0	359.9	0	0
532	Vmin20a DEG						MinMax	0	359.9	0	0

Sensor Statistics

Sensors	Expected Data Points	Actual Data Points	% Data Recovered	Hours Out of Range	Hours of Icing	Hours of Fault	% Data Good
Anem50aMS	4321	4321	100	0	0	2.667	99.63
AnemSD50aMS	4321	4321	100	0	0	2.667	99.63
Anem50bMS	4321	4321	100	0	0	5.667	99.213
AnemSD50bMS	4321	4321	100	0	0	5.667	99.213
Anem38aMS	4321	4321	100	0	0	0.167	99.977
AnemSD38aMS	4321	4321	100	0	0	0.167	99.977
Anem38bMS	4321	4321	100	0	0	0.5	99.931
AnemSD38bMS	4321	4321	100	0	0	0.5	99.931
Anem20aMS	4321	4321	100	0	0	0	100
AnemSD20aMS	4321	4321	100	0	0	0	100
Vane50aDEG	4321	4321	100	0	0	0	100
VaneSD50aDEG	4321	4321	100	0	0	0	100
Vane38aDEG	4321	4321	100	0	0	0	100
VaneSD38aDEG	4321	4321	100	0	0	0	100
Vane20aDEG	4321	4321	100	0	0	0	100
VaneSD20aDEG	4321	4321	100	0	0	0	100
Etmp2aDEGC	4321	4321	100	0	0	0	100
EtmpSD2aDEGC	4321	4321	100	0	0	0	100
Total	77778	77778	100	0	0	18	99.861

APPENDIX B - Plot Data

Wind Speed Distribution Data

Bin Center Wind Speed [m/s]	Percent of Time [%]
0.5	1.17
1.5	3.8
2.5	9.35
3.5	15.28
4.5	17.56
5.5	18.24
6.5	14.38
7.5	8.96
8.5	5.2
9.5	3.25
10.5	1.36
11.5	0.69
12.5	0.42
13.5	0.29
14.5	0.05
15.5	0
16.5	0
17.5	0
18.5	0
19.5	0
20.5	0
21.5	0
22.5	0
23.5	0
24.5	0

Table 1 - Wind Speed Distribution

Monthly Average Wind Speed Data

Date	10 min Mean [m/s]
May-06	5.62
June-06	5.42
July-06	5.50
Aug-06	4.84

Table 2 - Wind Speed Averages, 49m

Diurnal Average Wind Speed Data

Hour of Day	Average Wind Speed [m/s]
0.5	5.11
1.5	5.01
2.5	4.90
3.5	4.90
4.5	4.92
5.5	4.94
6.5	4.78
7.5	4.59
8.5	4.59
9.5	4.79
10.5	5.09
11.5	5.48
12.5	5.80
13.5	6.05
14.5	6.11
15.5	6.18
16.5	5.95
17.5	5.81
18.5	5.65
19.5	5.35
20.5	5.18
21.5	5.01
22.5	4.96
23.5	4.93

Table 3 - Diurnal Average Wind Speeds

Wind Rose Data

Direction	Percent Time [%], 49 m	Mean Wind Speed [m/s], 49 m
N	4.03	4.44
NNE	5.66	4.66
NE	3.96	4.63
ENE	2.65	3.91
E	2.04	3.72
ESE	2.24	3.80
SE	3.03	4.34
SSE	2.73	4.82
S	7.71	4.98
SSW	23.37	6.25
SW	19.58	6.12
WSW	5.88	4.39
W	3.62	4.52
WNW	4.28	4.63
NW	5.01	4.58
NNW	4.21	4.92

Table 4 - Wind Rose, Time Percentage and Mean Wind Speed by Direction