

WIND DATA REPORT

Mt. Tom

September 1, 2003 – November 31, 2003

Prepared for

Massachusetts Technology Collaborative
75 North Drive
Westborough, MA 01581

by

James F. Manwell
Anthony F. Ellis
Taylor Geer

January 15, 2004

Renewable Energy Research Laboratory
University of Massachusetts, Amherst
160 Governors Drive, Amherst, MA 01003

www.ceere.org/rerl • (413) 545-4359 • rerl@ecs.umass.edu



TABLE OF CONTENTS


Table of Contents.....	1
Table of Figures.....	1
Executive Summary.....	2
SECTION 1 - Station Location.....	3
SECTION 2 - Instrumentation and Equipment.....	3
SECTION 3 - Data Collection and Maintenance.....	4
Data Statistics Summary.....	4
 SECTION 4 - Significant Meteorological Events.....	5
SECTION 5 - Data Recovery and Validation.....	5
Test Definitions.....	5
Sensor Statistics.....	7
SECTION 6 - Data Summary.....	7
SECTION 7 - Graphs.....	9
Wind Speed Time Series.....	9
Wind Speed Distributions.....	10
Monthly Average Wind Speeds.....	10
Diurnal Average Wind Speeds.....	11
Turbulence Intensities.....	11
Wind Roses.....	12
APPENDIX A - Sensor Performance Report.....	13
Sensor Statistics.....	14
APPENDIX B - Plot Data.....	15
Wind Speed Distribution Data.....	15
Monthly Average Wind Speed Data.....	16
Diurnal Average Wind Speed Data.....	17
Wind Rose Data.....	18

TABLE OF FIGURES

Figure 1 - Site location at Mt. Tom site.....	3
Figure 2 - Wind Speed Time Series, September 2003 – November 2003.....	9
Figure 3 - Wind Speed Distribution, September 2003 – November 2003.....	10
Figure 4 - Monthly average wind speed.....	10
Figure 5 - Diurnal Wind Speed, September 2003 – November 2003.....	11
Figure 6 - Turbulence Intensity vs. Wind Speed, September 2003 – November 2003.....	11
Figure 7 - Wind Rose, September 2003 – November 2003.....	12



EXECUTIVE SUMMARY

This wind measurement station is installed on the FAA tower at Mt. Tom in Holyoke, MA. Installed in December of 1999, the station is in continuous operation to this day. The two sets of two anemometers and one wind vane are mounted at 24 m (78.7 ft) and 37 m (121.4 ft) respectively.

During the period covered by this report, September 2003 – November 2003, the mean recorded wind speed at 24 meters was 5.05 m/s (11.3 mph); there was not enough data to determine the prevailing wind direction. The gross data recovery percentage (the actual percentage of expected data received) was 100% and the net data recovery percentage (the percentage of expected data which passed all of the quality assurance tests) was 82.471%. The net data recovery value is low is because of multiple sensor failures occurring during this data quarter. As a result, the wind data reported in this report is all at 24 meters.

SECTION 1 - Station Location

The Mt. Tom site is located at an existing FAA tower on top of Mt. Tom in Holyoke, MA. Some trees are located in the vicinity, as is an ESI-80 wind turbine. The location of the tower base is at 42°-14-59.2' North, 72°-38-42.2' West.

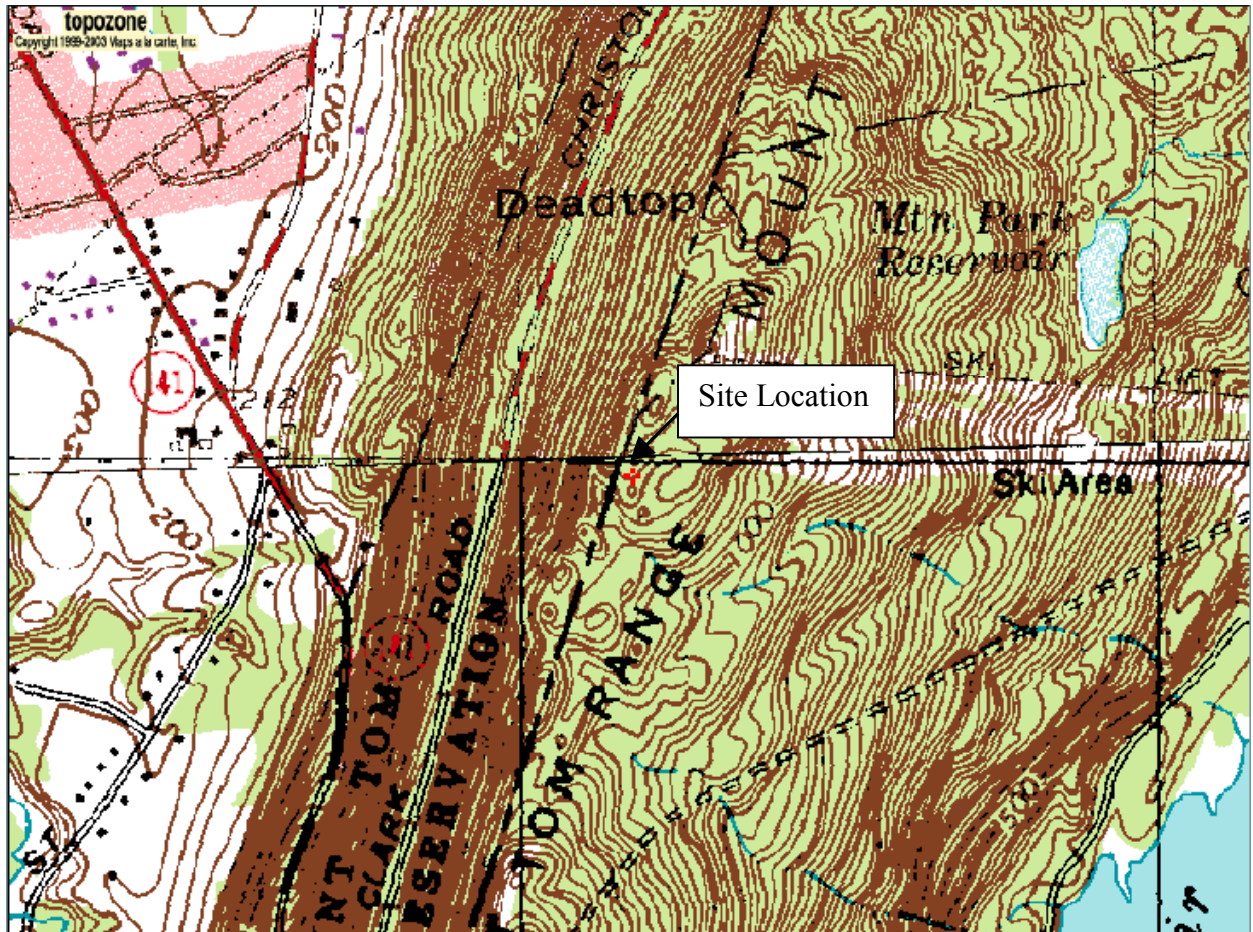


Figure 1 - Site location at Mt. Tom site.

Source: www.topozone.com.

SECTION 2 - Instrumentation and Equipment

The wind monitoring equipment is mounted on a 160 ft lattice tower. All the remaining monitoring equipment comes from NRG Systems, and consists of the following items:

- Model 9302 Cellogger®, serial # 0656
- Electrical enclosure box
- Yagi directional antenna and mount
- 4 – #40 Anemometers, standard calibration (Slope - 0.765 m/s, Offset – 0.350 m/s)
- 2 - #200P Wind direction vanes
- 4 – Sensor booms, 43” length
- Lightning rod and grounding cable
- Shielded sensor wire

The NRG 9302 system logger is equipped with a built-in cell phone so that the data can be transmitted weekly to a PC, located at the University of Massachusetts/ Amherst. The logger samples wind speed and direction once every second. These are then combined into 10-minute averages, and along with the standard deviation for those 10-minute periods, are put into a binary file. These binary files are converted to ASCII text files using the NRG software BaseStation®. These text files are then imported into a database software program where they are subjected to QA tests prior to using the data.

SECTION 3 - Data Collection and Maintenance

The following maintenance/equipment problems occurred during the report period, and the following corrective actions taken:

- November 2, 14:00: Primary Anemometer at 24 meters fails.
- November 3, 16:00: Primary Anemometer at 37 meters fails.
- November 5, 7:10: Secondary Anemometer at 37 meters, Vane at 37 meters, and Vane at 24 meters fail.

Data Statistics Summary

Date	Mean Wind Speed 24 m,[m/s]	Max Wind Speed 24 m,[m/s]	Turbulence Intensity 24 m,[]	Prevailing Wind Direction 24 m,[]
September 2003	4.12	13.84	0.27	E
October 2003	5.24	16.93	0.26	WNW
November 2003	5.82	24.05	0.21	Not Enough Data
Sept 03 – Nov 03	5.05	24.05	0.24	Not Enough Data

SECTION 4 - Significant Meteorological Events

On Thursday November 13 strong winds hit much of the northeast. The winds gusted to more than 70 mph in places on Thursday and gusts as high as 45 mph swept over some areas Friday. This windstorm is visible in the wind time series plot during this period.

Icing events occurred on the morning of October 20, over night between October 22-23, and on the morning of October 25.

The northeast region as a whole experienced slightly wet fall. According to the National Weather Service, Worcester, MA experienced above average precipitation (12.65 in, 0.25 in above average) and about average temperatures (54.02°F) during the fall of 2003. Boston, MA experienced above average precipitation (11.48 in, 0.23 in above average) and about average temperatures (54.25°F) during the fall of 2003. (www.erh.noaa.gov/box/MonthlyClimate2.shtml).

SECTION 5 - Data Recovery and Validation

All raw wind data are subjected to a series of tests and filters to weed out data that are faulty or corrupted. Definitions of these quality assurance (QA) controls are given below under Test Definitions and Sensor Statistics. These control filters were designed to automate the quality control process and used many of the previous hand-worked data sets made at UMass to affect a suitable emulation. The gross percentage of data recovered (ratio of the number of raw data points received to data points expected) and net percentage (ratio of raw data points which passed all QA control tests to data points expected) are shown below.

Gross Data Recovered [%]	100.0
Net Data Recovered [%]	82.471

The high Gross Data Recovery Percentage is an indication that the logger was recording and transmitting properly. The low Net Data Recovery Percentage is an indication that the sensors were not functioning properly.

Test Definitions

All raw data were subjected to a series of validation tests, as described below. The sensors tested and the parameters specific to each sensor are given in the Sensor Performance Report, which is included in APPENDIX A. Data which were flagged as invalid were not included in the statistics presented in this report.

MinMax Test: All sensors are expected to report data values within a range specified by the sensor and logger manufacturers. If a value falls outside this range, it is flagged as invalid. A data value from the sensor listed in Test Field 1 (TF1) is flagged if it is less than Factor 1 (F1) or greater than Factor 2. This test has been applied to the following sensors (as applicable): wind speed, wind speed standard deviation, wind direction, temperature, and solar insolation.

$$F1 > TF1 > F2$$

MinMaxT Test: This is a MinMax test for wind direction standard deviation with different ranges applied for high and low wind speeds. A wind direction standard deviation data value (TF1) is flagged either if it is less than Factor 1, if the wind speed (TF2) is less than Factor 4 and the wind direction standard deviation is greater than Factor 2, or if the wind speed is greater than or equal to Factor 4 and the wind direction standard deviation is greater than Factor 3.

$$\begin{aligned} & (TF1 < F1) \\ & \text{or } (TF2 < F4 \text{ and } TF1 > F2) \\ & \text{or } (TF2 \geq F4 \text{ and } TF1 > F3) \end{aligned}$$

Icing Test: An icing event is characterized by the simultaneous measurements of near-zero standard deviation of wind direction, non-zero wind speed, and near- or below-freezing temperatures. Wind speed, wind speed standard deviation, wind direction, and wind direction standard deviation data values are flagged if the wind direction standard deviation (CF1) is less than or equal to Factor 1, the wind speed (TF1) is greater than Factor 2, and the temperature (CF2) is less than Factor 3.

$$CF1 \leq F1 \text{ and } TF1 > F2 \text{ and } CF2 < F3$$

CompareSensors Test: Where primary and redundant sensors are used, it is possible to determine when one of the sensors is not performing properly. For anemometers, poor performance is characterized by low data values. Therefore, if one sensor of the pair reports values significantly below the other, the low values are flagged. At low wind speeds (Test Fields 1 and 2 less than or equal to Factor 3) wind speed data are flagged if the absolute difference between the two wind speeds is greater than Factor 1. At high wind speeds (Test Fields 1 or 2 greater than Factor 3) wind speed data are flagged if the absolute value of the ratio of the two wind speeds is greater is greater than Factor 2.

$$\begin{aligned} & [TF1 \leq F3 \text{ and } TF2 \leq F3 \text{ and } \text{abs}(TF1 - TF2) > F1] \\ & \text{or } [(TF1 > F3 \text{ or } TF2 > F3) \text{ and } (\text{abs}(1 - TF1 / TF2) > F2 \text{ or } \text{abs}(1 - TF2 / TF1) > F2)] \end{aligned}$$

Sensor Statistics

Expected Data Points: the total number of sample intervals between the start and end dates (inclusive).

Actual Data Points: the total number of data points recorded between the start and end dates.

% Data Recovered: the ratio of actual and expected data points (this is the *gross data recovered percentage*).

Hours Out of Range: total number of hours for which data were flagged according to MinMax and MinMaxT tests. These tests flag data which fall outside of an expected range.


Hours of Icing: total number of hours for which data were flagged according to Icing tests. This test uses the standard deviation of wind direction, air temperature, and wind speed to determine when sensor icing has occurred. It should be noted that, while this test is tuned to detect sensor icing events, it is possible for the conditions that are representative of icing to occur at other times. The error due to this possibility is considered to be insignificant.

Hours of Fault: total number of hours for which data were flagged according to CompareSensors tests. These tests compare two sensors (e.g. primary and redundant anemometers installed at the same height) and flag data points where one sensor differs significantly from the other.

% Data Good: the filter results are subtracted from the gross data recovery percentage to yield the *net data recovered percentage*.

SECTION 6 - Data Summary

This report contains several types of wind data graphs. Unless otherwise noted, each graph represents data from 1 quarter (3 months). The following graphs are included:

- Time Series – 10-minute average wind speeds are plotted against time.
- Wind Speed Distribution – A histogram plot giving the percentage of time that the wind is at a given wind speed. The maximum percentage is between 4 and 5 m/s.
- Month  Average – A plot of the monthly average wind speed over a 12-month period. This graph shows the trends in the wind speed from Jan 2003 – Dec 2003

- Diurnal – A plot of the average wind speed for each hour of the day. This graph shows a pattern of greater wind speeds in the evening, peaking at between 6 and 8 PM.
- Turbulence Intensity – A plot of turbulence intensity as a function of wind speed. Turbulence Intensity is calculated as the standard deviation of the wind speed divided by the wind speed and is a measure of the gustiness of a wind resource. Lower turbulence results in lower mechanical loads on a wind turbine. The turbulence intensities recorded during the fall were around 0.24.
- Wind Rose – A plot, by compass direction showing the percentage of time that the wind comes from a given direction and the average wind speed in that direction. This wind rose shows a strong prevailing WNW wind direction. The directional distribution of average wind speeds appears fairly even, with the highest speeds recorded from the S and WNW.

SECTION 7 - Graphs

Data for the wind speed histograms, monthly and diurnal average plots, and wind roses are included in APPENDIX B.

Wind Speed Time Series

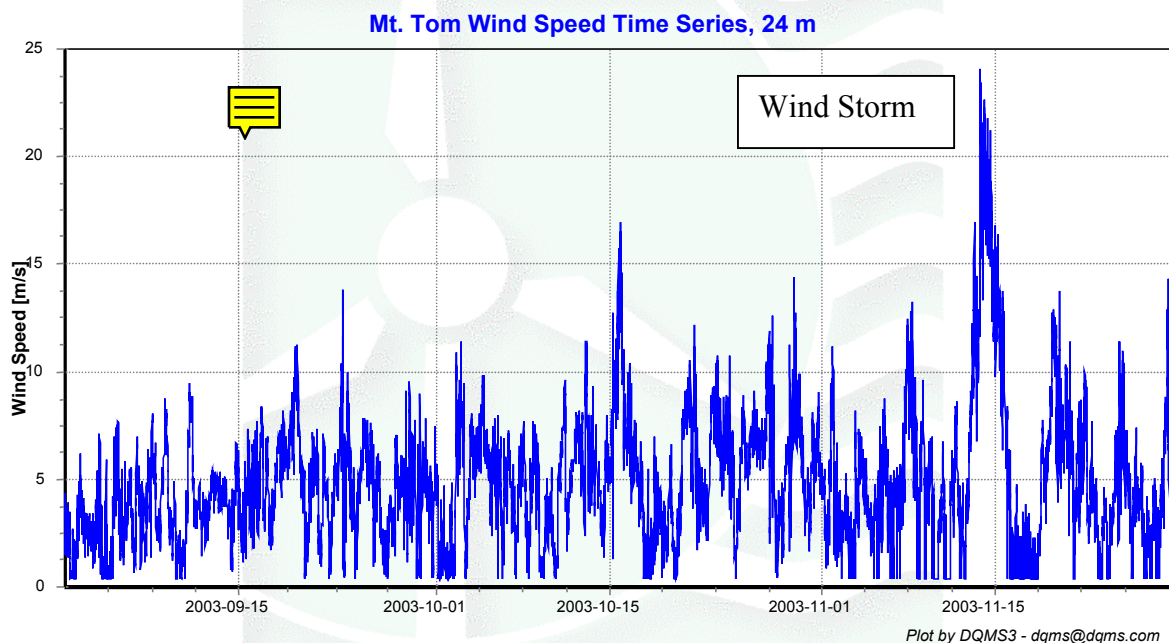


Figure 2 - Wind Speed Time Series, September 2003 – November 2003

Wind Speed Distributions

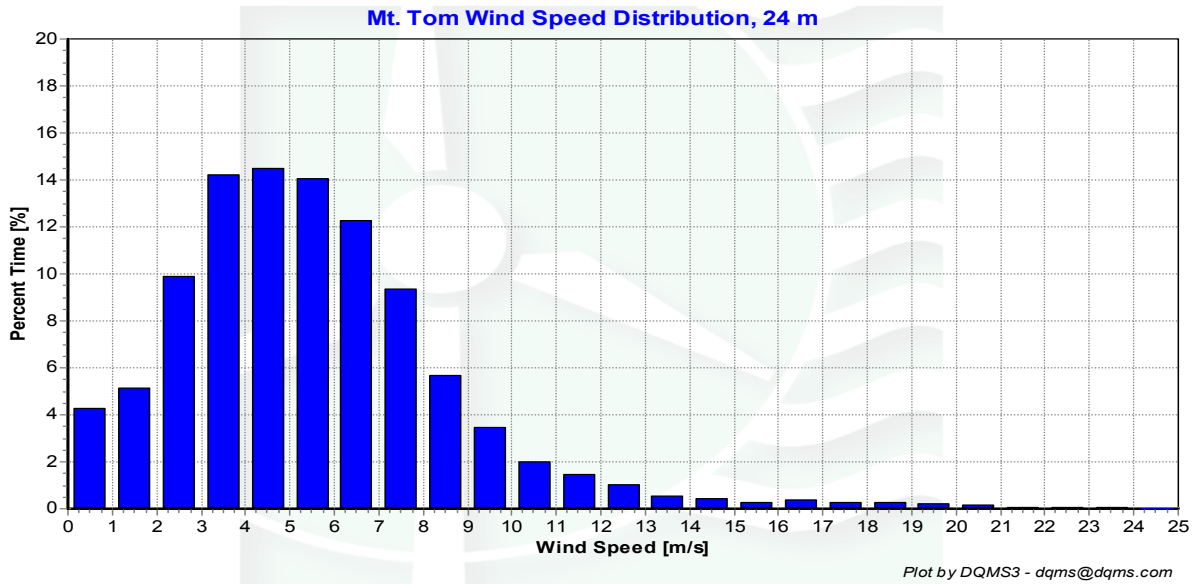


Figure 3 - Wind Speed Distribution, September 2003 – November 2003

Monthly Average Wind Speeds

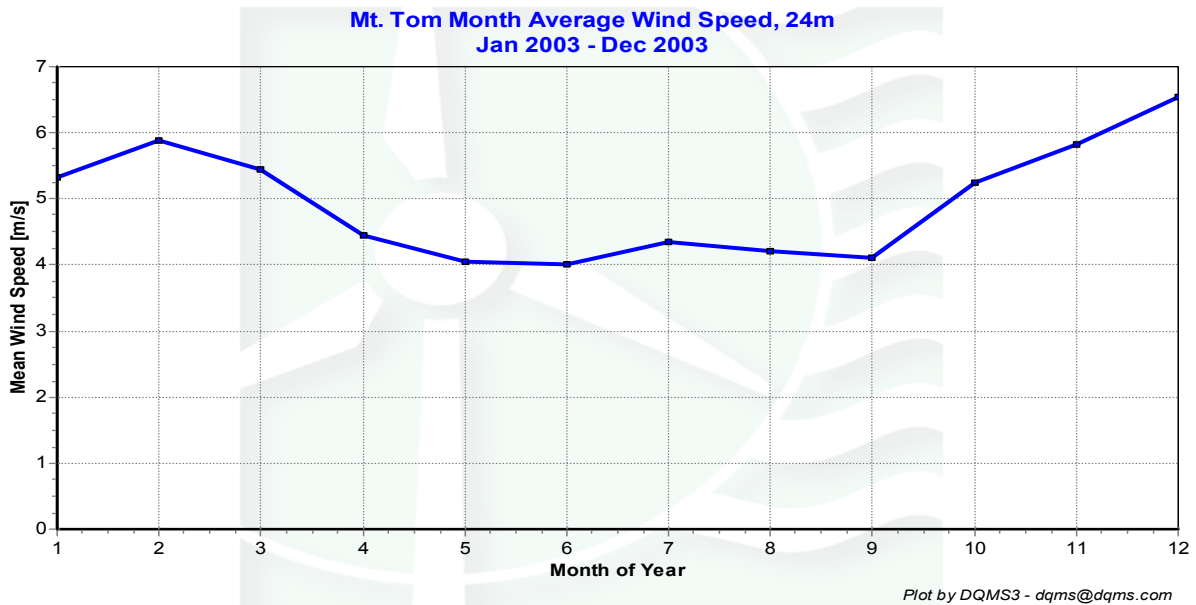


Figure 4 - Monthly average wind speed

Diurnal Average Wind Speeds

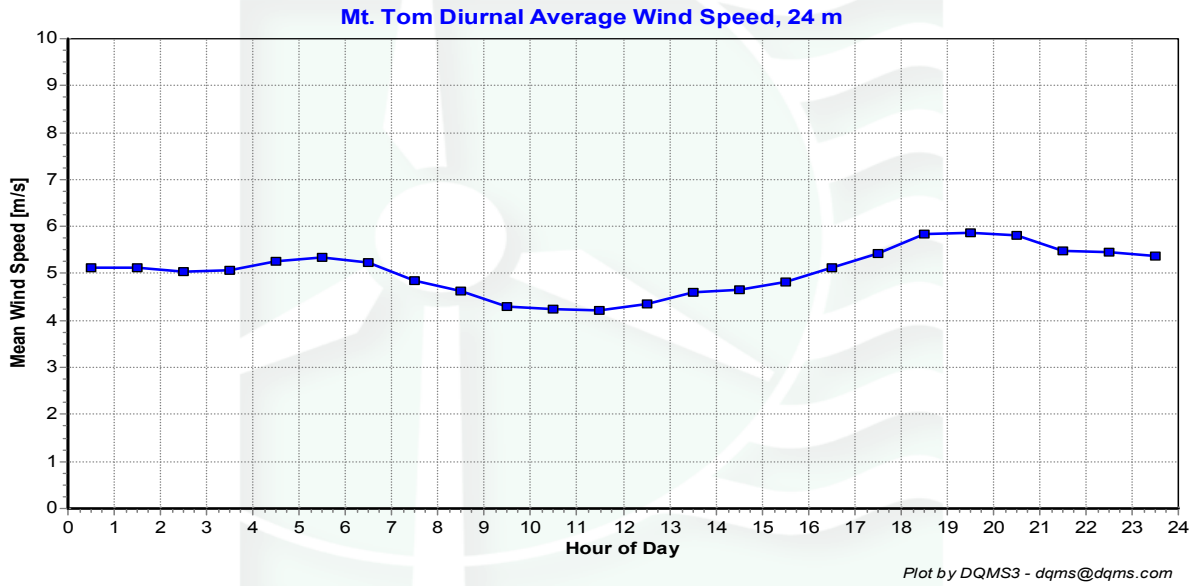


Figure 5 - Diurnal Wind Speed, September 2003 – November 2003

Turbulence Intensities

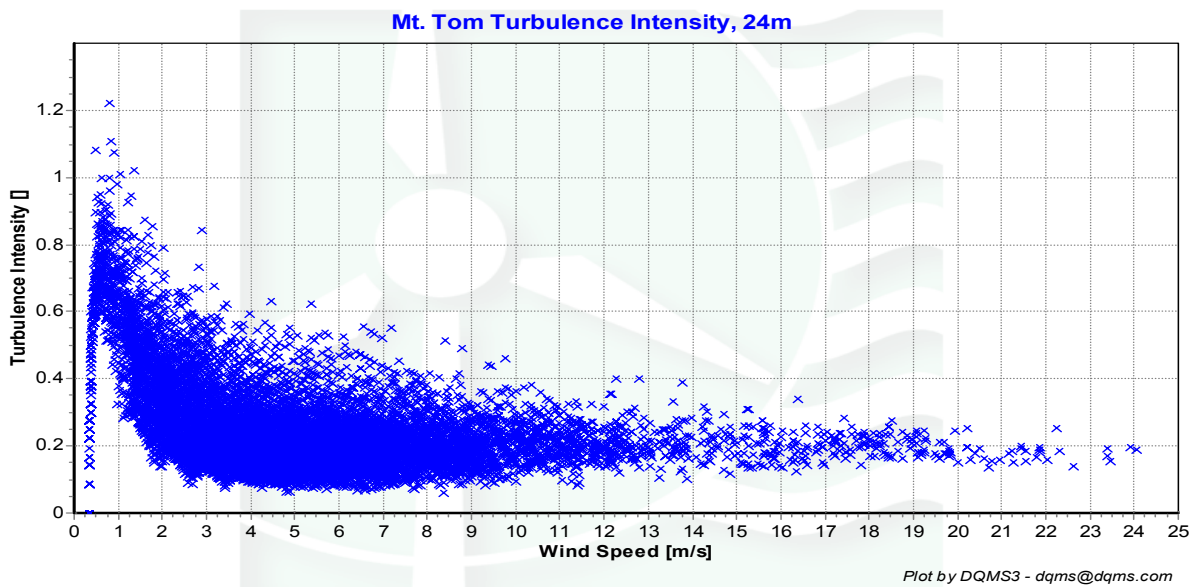


Figure 6 - Turbulence Intensity vs. Wind Speed, September 2003 – November 2003

Wind Roses

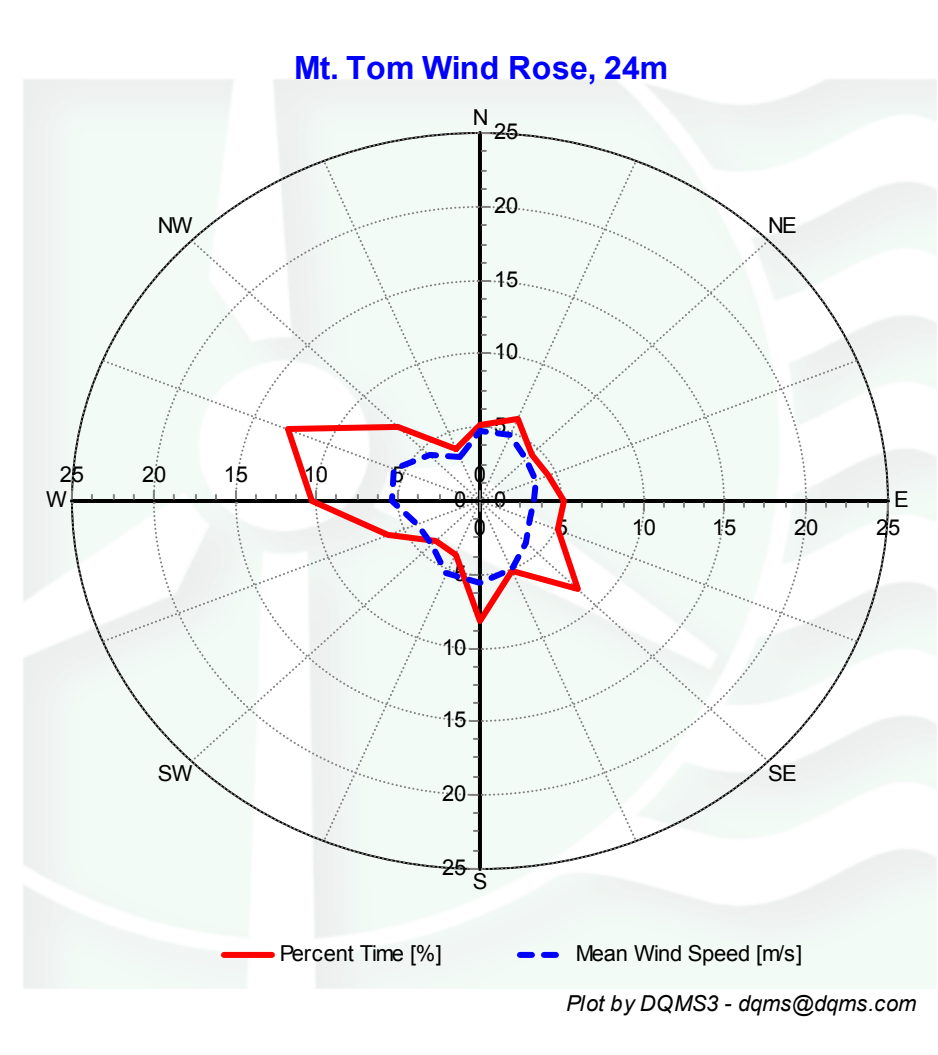


Figure 7 - Wind Rose, September 2003 – November 2003

APPENDIX A - Sensor Performance Report

Test Definitions

Test Order	TestField1	TestField2	TestField3	CalcField1	CalcField2	TestType	Factor1	Factor2	Factor3	Factor4
1						TimeTest Insert				
2	Itmp3aDEGC					MinMax	-30	60		
3	Batt3aVDC					MinMax	10.5	15		
4	Etmp3aDEGC					MinMax	-30	60		
5	EtmpSD3aDEGC					MinMax	0	4		
10	Anem24yMS					MinMax	0	90		
11	Anem37yMS					MinMax	0	90		
12	Anem24aMS					MinMax	0	90		
13	Anem24bMS					MinMax	0	90		
14	Anem37aMS					MinMax	0	90		
15	Anem37bMS					MinMax	0	90		
16	Anem18bMS					MinMax	0	90		
17	Anem21aMS					MinMax	0	90		
20	AnemSD24aMS					MinMax	0	7		
21	AnemSD24bMS					MinMax	0	7		
22	AnemSD37aMS					MinMax	0	7		
23	AnemSD37bMS					MinMax	0	7		
24	AnemSD18bMS					MinMax	0	7		
25	AnemSD21aMS					MinMax	0	7		
26	AnemSD24yMS					MinMax	0	7		
27	AnemSD37yMS					MinMax	0	7		
40	Pyro6aWMS					MinMax	0	1500		
41	PyroSD6aWMS					MinMax	0	1000		
50	Turb24zNONE					MinMax	0	2		
51	Turb37zNONE					MinMax	0	2		
60	Wshr0zNONE					MinMax	-100	100		
70	Pwr24zWMC					MinMax	0	10000		
71	Pwr37zWMC					MinMax	0	10000		
200	VaneSD24aDEG	Anem24yMS				MinMaxT	0	100	100	10
201	VaneSD37aDEG	Anem37yMS				MinMaxT	0	100	100	10
250	Vane24aDEG					MinMax	0	359.9		
251	Vane37aDEG					MinMax	0	359.9		
252	Vane19aDEG					MinMax	0	359.9		
300	Anem24aMS	AnemSD24aMS	Vane24aDEG	VaneSD24aDEG	Etmp3aDEGC	Icing	0.5	1	2	
301	Anem24bMS	AnemSD24bMS	Vane24aDEG	VaneSD24aDEG	Etmp3aDEGC	Icing	0.5	1	2	
302	Anem37aMS	AnemSD37aMS	Vane37aDEG	VaneSD37aDEG	Etmp3aDEGC	Icing	0.5	1	2	

303	Anem37bMS	AnemSD37bMS	Vane37aDEG	VaneSD37aDEG	Etmp3aDEGC	Icing	0.5	1	2	
400	Anem24aMS	Anem24bMS				CompareSensors	1	0.25	3	0
401	Anem37aMS	Anem37bMS				CompareSensors	1	0.25	3	0

Sensor Statistics

Sensor	Expected Data Points	Actual Data Points	% Data Recovered	Hours Out of Range	Hours of Icing	Hours of Fault	% Data Good
Itmp3aDEGC	13104	13104	100	0	0	0	100
Batt3aVDC	13104	13104	100	0	0	0	100
Anem24aMS	13104	13104	100	0	8	641.667	70.253
AnemSD24aMS	13104	13104	100	0	8	641.667	70.253
Anem24bMS	13104	13104	100	0	8	12	99.084
AnemSD24bMS	13104	13104	100	0	8	12	99.084
Anem37aMS	13104	13104	100	0	9.5	662.833	69.216
AnemSD37aMS	13104	13104	100	0	9.5	662.833	69.216
Anem37bMS	13104	13104	100	0	9.5	649.667	69.818
AnemSD37bMS	13104	13104	100	0	9.5	649.667	69.818
Vane24aDEG	13104	13104	100	0.833	8	617	71.345
VaneSD24aDEG	13104	13104	100	0.833	8	617	71.345
Vane37aDEG	13104	13104	100	0.5	9.5	617	71.291
VaneSD37aDEG	13104	13104	100	0.5	9.5	617	71.291
Etmp3aDEGC	13104	13104	100	0	0	0	100
EtmpSD3aDEGC	13104	13104	100	0	0	0	100
Pyro6aWMS	13104	13104	100	0	0	0	100
Total	222768	222768	100	2.667	105	6400.333	82.471

APPENDIX B - Plot Data

Wind Speed Distribution Data

Bin Center Wind Speed [m/s]	Percent of Time [%]
0.5	4.24
1.5	5.12
2.5	9.91
3.5	14.2
4.5	14.5
5.5	14.03
6.5	12.27
7.5	9.34
8.5	5.68
9.5	3.48
10.5	2.01
11.5	1.46
12.5	1.05
13.5	0.52
14.5	0.41
15.5	0.29
16.5	0.36
17.5	0.29
18.5	0.29
19.5	0.2
20.5	0.15
21.5	0.07
22.5	0.07
23.5	0.03
24.5	0.02

Table 1 - Wind Speed Distribution

Monthly Average Wind Speed Data

Date	10 min Mean [m/s]
2003 Jan	5.28
Feb	5.89
Mar	5.44
Apr	4.45
May	4.04
Jun	4.00
Jul	4.35
Aug	4.21
Sept	4.12
Oct	5.24
Nov	5.82
Dec	6.76

Table 2 - Wind Speed Averages

Diurnal Average Wind Speed Data

Hour of Day	Average Wind Speed [m/s]
0	5.11
1	5.13
2	5.05
3	5.07
4	5.25
5	5.35
6	5.23
7	4.86
8	4.63
9	4.3
10	4.25
11	4.21
12	4.34
13	4.59
14	4.65
15	4.82
16	5.13
17	5.42
18	5.85
19	5.86
20	5.82
21	5.47
22	5.46
23	5.37

Table 3 - Diurnal Average Wind Speeds

Wind Rose Data

Direction	Percent Time [%]	Mean Wind Speed [m/s]
N	5.21	4.75
NNE	6.03	4.83
NE	4.51	4.06
ENE	4.55	3.72
E	5.1	3.37
ESE	5.12	3.34
SE	8.49	4.03
SSE	5.1	5.06
S	8.18	5.55
SSW	3.95	5.32
SW	3.78	4.22
WSW	6.11	4.18
W	10.27	5.39
WNW	12.75	5.67
NW	7.03	4.34
NNW	3.82	3.2

Table 4 - Wind Rose, Time Percentage and Mean Wind Speed by Direction