

# **WIND DATA REPORT**

## **Russell Municipal Lighting Company**

June 2009 to August 2009

Prepared for

Massachusetts Technology Collaborative  
75 North Drive  
Westborough, MA 01581

by

Harsha Bojja  
James F. Manwell  
Utama Abdulwahid  
Anthony F. Ellis

October 14, 2009

Report template version 3.1.2

---

---

### **Wind Energy Center**

University of Massachusetts, Amherst  
160 Governors Drive, Amherst, MA 01003

[www.ceere.org/rerl](http://www.ceere.org/rerl) • (413) 545-4359 • [rerl@ecs.umass.edu](mailto:rerl@ecs.umass.edu)



## **NOTICE AND ACKNOWLEDGEMENTS**

This report was prepared by the Wind Energy Center (WEC) at the University of Massachusetts, Amherst in the course of performing work sponsored by the Renewable Energy Trust (RET), as administered by the Massachusetts Technology Collaborative (MTC). The opinions expressed in this report do not necessarily reflect those of MTC or the Commonwealth of Massachusetts, and reference to any specific product, service, process, or method does not constitute an implied or expressed recommendation or endorsement of it.

Further, MTC, the Commonwealth of Massachusetts, and WEC make no warranties or representations, expressed or implied, as to the fitness for particular purpose or merchantability of any product, apparatus, or service, or the usefulness, completeness, or accuracy of any processes, methods or other information contained, described, disclosed, or referred to in this report. MTC, the Commonwealth of Massachusetts, and the contractor make no representation that the use of any product, apparatus, process, method, or other information will not infringe privately owned rights and will assume no liability for any loss, injury, or damage directly or indirectly resulting from, or occurring in connection with, the use of information contained, described, disclosed, or referred to in this report.

# TABLE OF CONTENTS

Notice and Acknowledgements .....	1
Table of Contents .....	2
Table of Figures .....	3
Executive Summary .....	4
SECTION 1 - Station Location .....	5
SECTION 2 - Instrumentation and Equipment .....	6
SECTION 3 - Data Summary .....	6
SECTION 4 - Graphs .....	9
Wind Speed Time Series .....	10
Wind Speed Distributions .....	10
Monthly Average Wind Speeds .....	11
Diurnal Average Wind Speeds .....	11
Turbulence Intensities .....	11
Wind Roses .....	12
SECTION 5 - Significant Meteorological Events .....	13
SECTION 6 - Data Collection and Maintenance .....	13
SECTION 7 - Data Recovery and Validation .....	13
Test Definitions .....	13
Sensor Statistics .....	14
APPENDIX A - Sensor Performance Report .....	16
Test Definitions .....	16
Sensor Statistics .....	17
APPENDIX B - Plot Data .....	18
Wind Speed Distribution Data .....	18
Monthly Average Wind Speed Data .....	18
Diurnal Average Wind Speed Data .....	19
Wind Rose Data .....	20

## TABLE OF FIGURES

Figure 1 – Site Location.....	5
Figure 2 – Wind Speed Time Series, June 1, 2009 – August 31, 2009 .....	10
Figure 3 – Wind Speed Distribution, June 1, 2009 – August 31, 2009 .....	10
Figure 4 – Monthly Average Wind Speed, March, 2009 – August, 2009 .....	11
Figure 5 – Diurnal Average Wind Speeds, June 1, 2009 – August 31, 2009 .....	11
Figure 6 – Turbulence Intensity vs. Wind Speed, June 1, 2009 – August 31, 2009.....	11
Figure 7 – Wind Rose, June 1, 2009 – August 31, 2009 .....	12

## EXECUTIVE SUMMARY

All the work presented in this Wind Data Report including installation and decommissioning of the meteorological tower and instrumentation, and the data analysis and reporting was performed by the Wind Energy Center (WEC) at the University of Massachusetts, Amherst.

Wind monitoring equipment was installed at Holiday Hill, a privately owned, large wooded land in the town of Russell on February 3<sup>rd</sup> 2009. The base of the 40 meter meteorological tower was installed 38 meters above sea level. Anemometers were installed at 25 and 39 meters (82.02 and 127.95 feet) above the base of the tower. There are redundant anemometers at both the heights. Wind direction vanes were installed at 25 and 39 meters. A temperature sensor is installed near the base of the tower. Also, a battery pack is attached to the tower base.

This report summarizes the wind data collected during the summer of 2009, between June 2009 and August 2009. The mean recorded wind speed was 3.95 m/s (8.8 mph\*) at 39 meters, and the prevailing wind direction was from the north-northwest. The average wind shear component was 0.21.

The gross data recovery percentage (the actual percentage of expected data received) was 100% and the net data recovery percentage (the percentage of expected data which passed all of the quality assurance tests) was 99.65%

Additional information about interpreting the data presented in this report can be found in the Fact Sheet, "Interpreting Your Wind Resource Data," produced by RERL and the Massachusetts Technology Collaborative (MTC). This document is found through the RERL website:

[http://www.ceere.org/rerl/about\\_wind/RERL\\_Fact\\_Sheet\\_6\\_Wind\\_resource\\_interpretation.pdf](http://www.ceere.org/rerl/about_wind/RERL_Fact_Sheet_6_Wind_resource_interpretation.pdf)

\* 1 m/s = 2.237 mph.

## SECTION 1 - Station Location

The Russell Municipal Lighting Company monitoring tower is located on Holiday Hill, a large wooded private area. The 50 meter tower is located at  $42^{\circ}12'40.09''$  N,  $72^{\circ}52'15.35''$  W and the tower base is approximately 370 meters above sea level. The approximate tower location is marked by the white box shown in Figure 1.



Figure 1 – Site Location

## **SECTION 2- Instrumentation and Equipment**

The wind monitoring equipment is mounted on a 40 m (131 ft) meteorological tower. The wind monitoring equipment comes from NRG systems and consists of the following items:

- NRG Symphonie data logger
- 4 – NRG #40 Anemometers, standard calibration (Slope – 0.765 m/s, Offset – 0.350 m/s). Two anemometers are located at 39 m (127.95 ft), and another two anemometers are located at 25 m (82.02 ft).
- 2 – NRG #200P Wind direction vanes. The vanes are located at 39 m (127.95 ft) and 25 m (82.02 ft).
- NRG #110S temperature sensor
- NRG ipack battery pack

The data from the Symphonie logger is mailed to WEC via a data card on a monthly basis. The logger samples wind speed and direction once every two second. These samples are combined into 10-minute averages and are put into a binary file along with the maximum, minimum and standard deviation for each 10-minute interval. The binary files are converted to ASCII text files using NRG software. These text files are then imported into a database software program where they are subjected to quality assurance tests prior to data usage.

## **SECTION 3- Data Summary**

A summary of the wind speeds and wind directions measured during the reporting period is included in Table 1. Table 1 includes the mean wind speeds measured at each measurement height, the maximum instantaneous wind speed measured at each measurement height and the prevailing wind direction measured at each measurement height. These values are provided for each month of the reporting period and for the whole reporting period.

**Table 1. Wind Speed and Direction Data Summary**

<b>Date</b>	<b>Mean Wind Speed</b>	<b>Max Wind Speed</b>	<b>Prevailing Wind Direction</b>	<b>Mean Wind Speed</b>	<b>Max Wind Speed</b>	<b>Prevailing Wind Direction</b>
<b>Height Units</b>	<b>39 m [m/s]</b>	<b>39 m [m/s]</b>	<b>39 m [m/s]</b>	<b>25 m [m/s]</b>	<b>25 m [m/s]</b>	<b>25 m [m/s]</b>
June 2009	3.69	14.87	SSE	3.33	14.14	SSE
July 2009	4.11	21.79	NW	3.75	19.85	NW
August 2009	4.04	13.73	NNW	3.67	13.73	NW
<b>Jun 2009-Aug 2009</b>	<b>3.95</b>	<b>21.79</b>	<b>NNW</b>	<b>3.59</b>	<b>19.85</b>	<b>NW</b>

Wind data statistics in the table are reported when more than 90% of the data during the reporting period are valid. In cases when a larger amount of data are missing, the percent of the available data that are used to determine the data statistics is noted.

No measurement of wind speed or direction can be perfectly accurate. Wind speed measurement errors occur due to anemometer manufacturing variability, anemometer calibration errors, the response of anemometers to turbulence and vertical air flow and due to air flows caused by the anemometer mounting system. Every effort is made to reduce the sources of these errors. Nevertheless, the values reported in this report have an expected uncertainty of about  $\pm 2\%$  or  $\pm 0.2$  m/s, whichever is greater. Wind direction measurement errors occur due to sensor measurement uncertainty, tower effects, boom alignment measurement errors and twisting of pipe sections during the raising of a pipe tower. Efforts are also made to reduce these errors, but the reported wind directions are estimated to have an uncertainty of  $\pm 5$  degrees.

A summary of the turbulence intensity and mean wind shear measured at each measurement height during the reporting period is included in Table 2. These values are provided for each month of the reporting period and for the whole reporting period. Turbulence Intensity is calculated by dividing the standard deviation of the wind speed by the mean wind speed and is a measure of the gustiness of a wind resource. Lower turbulence results in lower mechanical loads on a wind turbine. Turbulence intensity varies with wind speed. The average turbulence intensity presented in Table 2 is the mean turbulence intensity when the wind speed at each measurement height is between 10 and 11 m/s.



Shear coefficients provide a measure of the change in wind speed with height. When data at multiple heights are available, shear coefficients,  $\alpha$ , have been determined. They can be used in the following formula to estimate the average wind speed,  $U(z)$ , at height  $z$ , when the average wind speed,  $U(z_r)$ , at height  $z_r$  is known:

$$U(z) = U(z_r) \left( \frac{z}{z_r} \right)^\alpha$$

The change in wind speed with height is a very complicated relationship related to atmospheric conditions, wind speed, wind direction, time of day and time of year. This formula will not always provide the correct answer at any given site. Nevertheless the calculated shear coefficient, based on measurements at two heights, can be used to characterize the degree of increase in wind speed with height at a site.

The mean wind shear coefficient that is provided here is calculated based on the mean wind speeds in Table 1, where  $z_{high}$  and  $z_{low}$  are the heights of the higher and lower mean wind speeds used in the calculation and  $U(z_{low})$  and  $U(z_{high})$  are the mean wind speeds at the two heights.

$$\alpha = \log \left( \frac{U(z_{high})}{U(z_{low})} \right) / \log \left( \frac{z_{high}}{z_{low}} \right)$$

**Table 2. Shear and Turbulence Intensity Data Summary**

Date	Turbulence Intensity at 10 m/s	Turbulence Intensity at 10 m/s	Mean Wind Shear Coefficient, $\alpha$
Height Units	39 m [-]	25 m [-]	Between 39 m and 25 m [-]
June 2009	0.18	-	0.23
July 2009	0.21	0.22	0.21
August 2009	0.16	-	0.22
<b>Jun 2009 - Aug 2009</b>	<b>0.19</b>	<b>0.22</b>	<b>0.21</b>

## SECTION 4- Graphs

This report contains several types of wind data graphs. Unless otherwise noted, each graph represents data from 1 quarter (3 months). The following graphs are included:

- Time Series – 10-minute average wind speeds are plotted against time.
- Wind Speed Distribution – A histogram plot giving the percentage of time that the wind is at a given wind speed.
- Monthly Average – A plot of the monthly average wind speed over a 6-month period. This graph shows the trends in the wind speed over the year.
- Diurnal – A plot of the average wind speed for each hour of the day.
- Turbulence Intensity – A plot of turbulence intensity as a function of wind speed. Turbulence Intensity is calculated as the standard deviation of the wind speed divided by the wind speed and is a measure of the gustiness of a wind resource. Lower turbulence results in lower mechanical loads on a wind turbine.
- Wind Rose – A plot, by compass direction showing the percentage of time that the wind comes from a given direction and the average wind speed in that direction.


With regards to the Russell Muni site, the following observations are noted.

- Time Series, Figure 2: shows that the wind speed seldom exceeded 10 m/s at the site during the summer months.
- Wind Speed Distribution, Figure 3: shows that the distribution is skewed towards moderate wind speeds for the summer months. Wind speeds are primarily between 2 and 6 m/s during the summer and the most common wind speed is between 3 and 4 m/s.
- Monthly Average, Figure 4: shows that the average monthly wind speed at the site increase through the spring and drops off during the summer.
- Diurnal, Figure 5: shows that on average the wind speed is fairly consistent through out the day, with slightly higher winds on average in the afternoon hours and slightly lower winds on average in the morning.
- Turbulence Intensity, Figure 6: we can see the turbulence numbers roughly cluster between 0.1 and 0.4 for most wind speeds.

- Wind Rose, Figure 7: shows that the prevailing winds are from the north-northwest direction (with another lower peak from the south-southeast) and maximum wind speeds occur from the general north-northwest direction.


Data for the wind speed histograms, monthly and diurnal average plots, and wind roses are included in APPENDIX B.

### Wind Speed Time Series

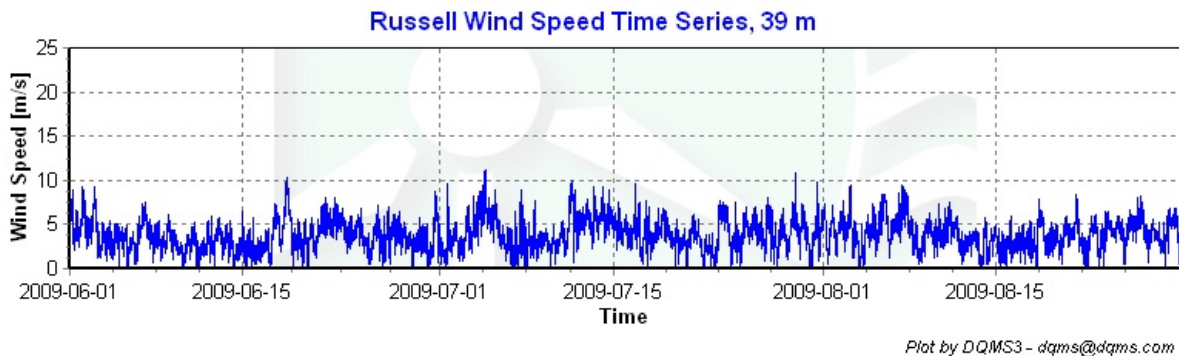

**Figure 2 – Wind Speed Time Series, June 1, 2009 – August 31, 2009**

### Wind Speed Distributions

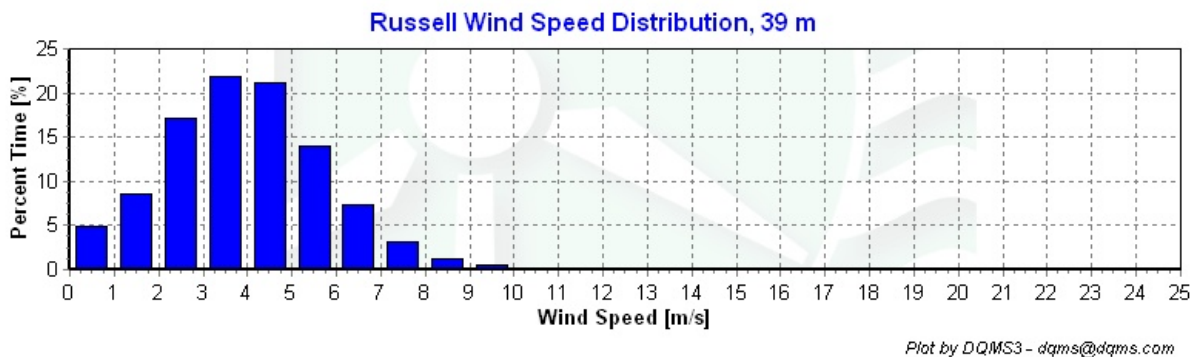

**Figure 3 – Wind Speed Distribution, June 1, 2009 – August 31, 2009**

### Monthly Average Wind Speeds

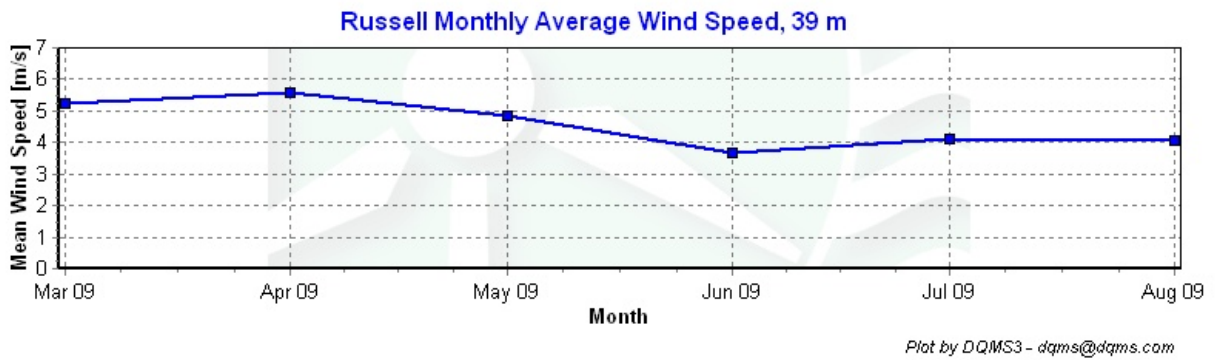


Figure 4 – Monthly Average Wind Speed, March, 2009 – August, 2009

### Diurnal Average Wind Speeds

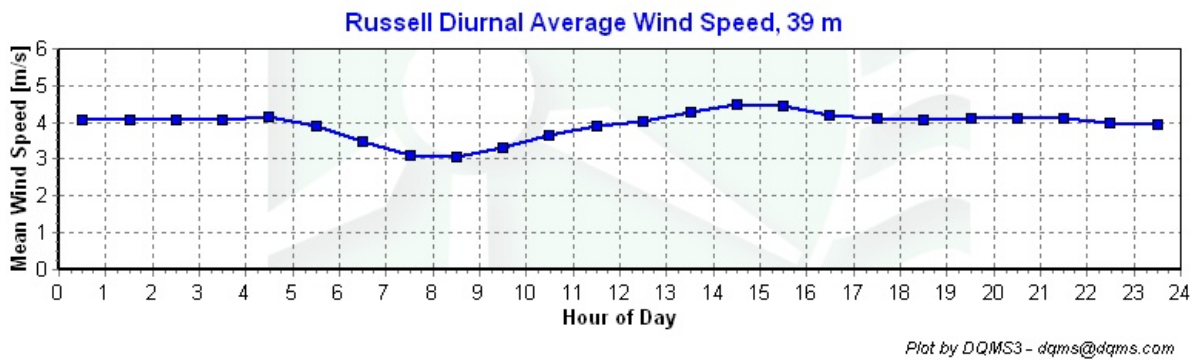


Figure 5 – Diurnal Average Wind Speeds, June 1, 2009 – August 31, 2009

### Turbulence Intensities


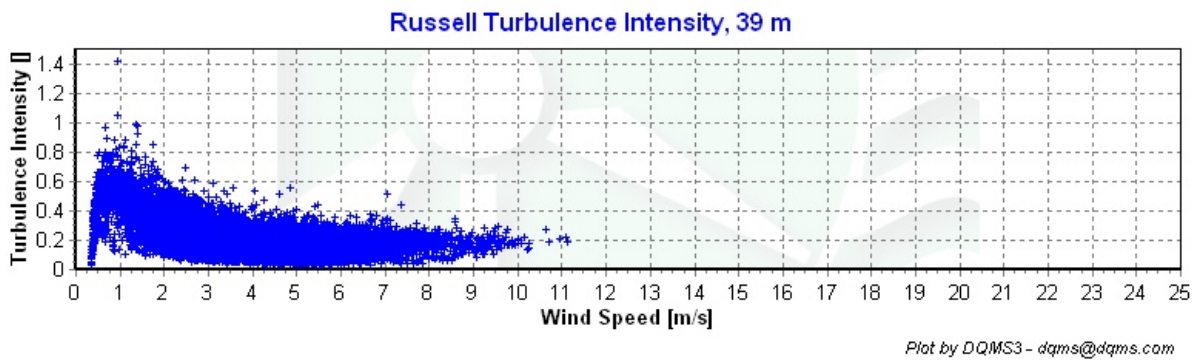


Figure 6 – Turbulence Intensity vs. Wind Speed, June 1, 2009 – August 31, 2009

## Wind Roses

### Russell Wind Rose, 39 m

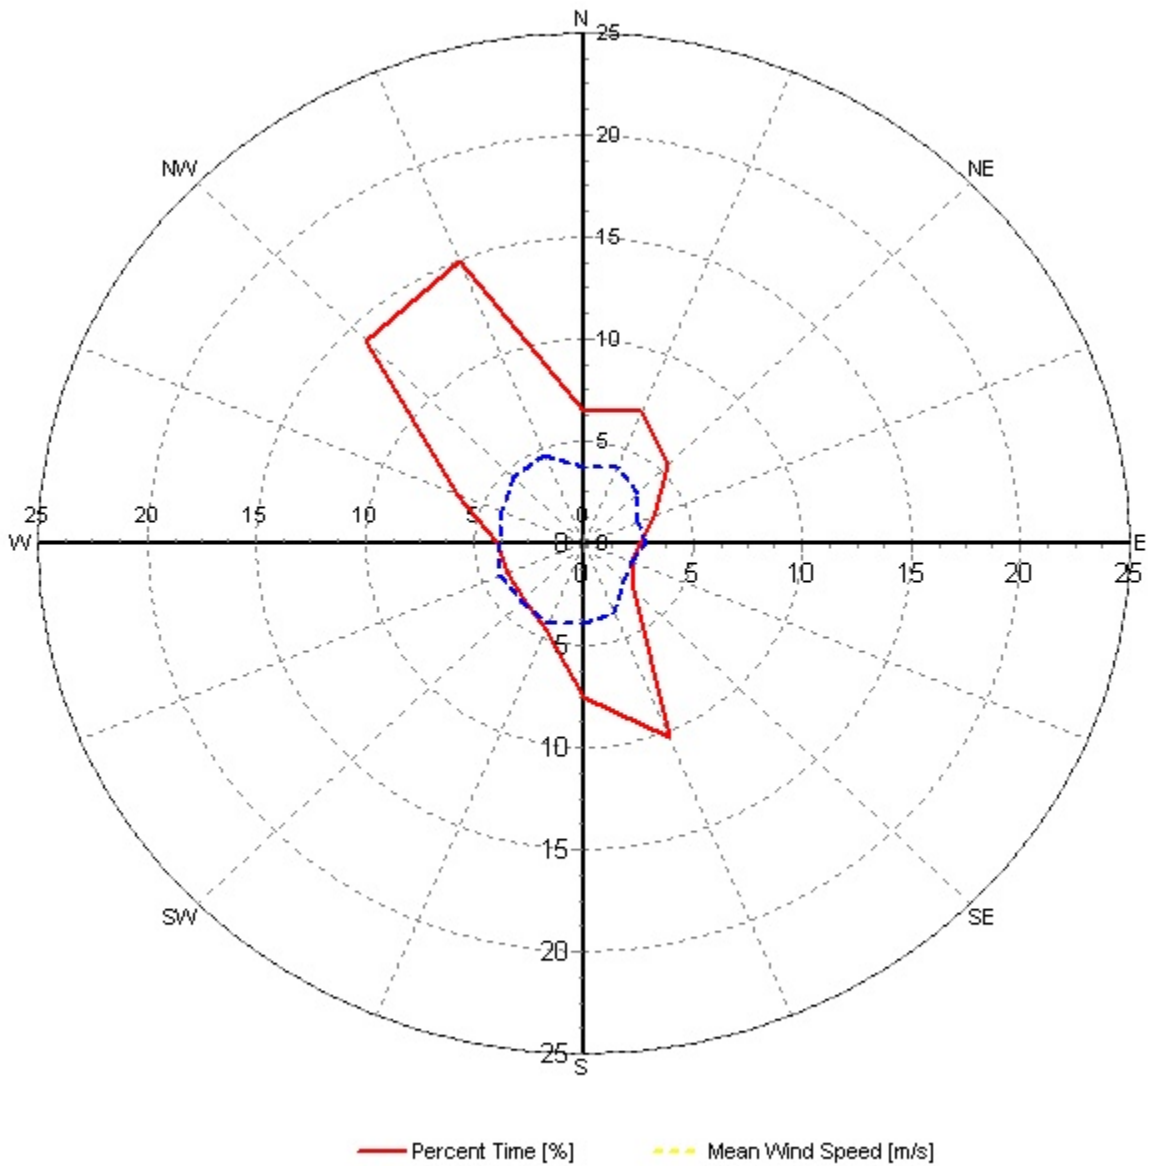

Plot by DQMS3 - dqms@dqms.com

**Figure 7 – Wind Rose, June 1, 2009 – August 31, 2009**

## SECTION 5 - Significant Meteorological Events

There were no extreme meteorological events during this data collection period. The highest recorded wind speed was 21.79 m/s (48.7 mph) at 39 meters.

## SECTION 6 - Data Collection and Maintenance

All sensors and equipment functioned properly throughout the monitoring period. No maintenance was performed during this quarter.

## SECTION 7 - Data Recovery and Validation

All raw wind data are subjected to a series of tests and filters to weed out data that are faulty or corrupted. Definitions of these quality assurance (QA) controls are given below under Test Definitions and Sensor Statistics. These control filters were designed to automate the quality control process and used many of the previous hand-worked data sets made at UMass to affect a suitable emulation. The gross percentage of data recovered (ratio of the number of raw data points received to data points expected) and net percentage (ratio of raw data points which passed all QA control tests to data points expected) are shown below.

Gross Data Recovered [%]	100
Net Data Recovered [%]	99.65

### Test Definitions

All raw data were subjected to a series of validation tests, as described below. The sensors tested and the parameters specific to each sensor are given in the Sensor Performance Report which is included in APPENDIX A. Data which were flagged as invalid were not included in the statistics presented in this report.

**MinMax Test:** All sensors are expected to report data values within a range specified by the sensor and logger manufacturers. If a value falls outside this range, it is flagged as invalid. A data value from the sensor listed in Test Field 1 (TF1) is flagged if it is less than Factor 1 (F1) or greater than Factor 2. This test has been applied to the following sensors (as applicable): wind speed, wind speed standard deviation, wind direction, temperature, and solar insolation.

$$F1 > TF1 > F2$$

**MinMaxT Test:** This is a MinMax test for wind direction standard deviation with different ranges applied for high and low wind speeds. A wind direction standard

deviation data value (TF1) is flagged either if it is less than Factor 1, if the wind speed (TF2) is less than Factor 4 and the wind direction standard deviation is greater than Factor 2, or if the wind speed is greater than or equal to Factor 4 and the wind direction standard deviation is greater than Factor 3.

$$\begin{aligned} & (TF1 < F1) \\ & \text{or } (TF2 < F4 \text{ and } TF1 > F2) \\ & \text{or } (TF2 \geq F4 \text{ and } TF1 > F3) \end{aligned}$$

**Icing Test:** An icing event occurs when ice collects on a sensor and degrades its performance. Icing events are characterized by the simultaneous measurements of near-zero standard deviation of wind direction, non-zero wind speed, and near- or below-freezing temperatures. Wind speed, wind speed standard deviation, wind direction, and wind direction standard deviation data values are flagged if the wind direction standard deviation (CF1) is less than or equal to Factor 1 (F1), the wind speed (TF1) is greater than Factor 2 (F2), and the temperature (CF2) is less than Factor 3 (F3). To exit an icing event, the wind direction standard deviation must be greater than Factor 4.

$$CF1 \leq F1 \text{ and } TF1 > F2 \text{ and } CF2 < F3$$

**CompareSensors Test:** Where primary and redundant sensors are used, it is possible to determine when one of the sensors is not performing properly. For anemometers, poor performance is characterized by low data values. Therefore, if one sensor of the pair reports values significantly below the other, the low values are flagged. At low wind speeds (Test Fields 1 and 2 less than or equal to Factor 3) wind speed data are flagged if the absolute difference between the two wind speeds is greater than Factor 1. At high wind speeds (Test Fields 1 or 2 greater than Factor 3) wind speed data are flagged if the absolute value of the ratio of the two wind speeds is greater is greater than Factor 2.

$$\begin{aligned} & [ TF1 \leq F3 \text{ and } TF2 \leq F3 \text{ and } \text{abs}(TF1 - TF2) > F1 ] \\ & \text{or } [ (TF1 > F3 \text{ or } TF2 > F3) \text{ and } (\text{abs}(1 - TF1 / TF2) > F2 \text{ or } \text{abs}(1 - TF2 / TF1) > F2) ] \end{aligned}$$

### Sensor Statistics

A summary of the results of the data collection and filtering are given in the Sensor Performance Report which is included in APPENDIX A. The following categories of information, tabulated for each sensor, are included in that report.

**Expected Data Points:** the total number of sample intervals between the start and end dates (inclusive).

**Actual Data Points:** the total number of data points recorded between the start and end dates.

**% Data Recovered:** the ratio of actual and expected data points (this is the *gross data recovered percentage*).

**Hours Out of Range:** total number of hours for which data were flagged according to MinMax and MinMaxT tests. These tests flag data which fall outside of an expected range.

**Hours of Icing:** total number of hours for which data were flagged according to Icing tests. This test uses the standard deviation of wind direction, air temperature, and wind speed to determine when sensor icing has occurred.

**Hours of Fault:** total number of hours for which data were flagged according to CompareSensors tests. These tests compare two sensors (e.g. primary and redundant anemometers installed at the same height) and flag data points where one sensor differs significantly from the other.

**% Data Good:** the filter results are subtracted from the gross data recovery percentage to yield the *net data recovered percentage*.



# APPENDIX A - Sensor Performance Report

## Test Definitions

Test Order	Test Field 1	Test Field 2	Test Field 3	Calc Field 1	Calc Field 2	Test Type	Factor 1	Factor 2	Factor 3	Factor 4
1						TimeTest Insert	0	0	0	0
2	Anem39aMS					MinMax	0	90	0	0
3	Anem39bMS					MinMax	0	90	0	0
4	Anem25aMS					MinMax	0	90	0	0
5	Anem25bMS					MinMax	0	90	0	0
6	Anem39yMS					MinMax	0	90	0	0
7	Anem25yMS					MinMax	0	90	0	0
8	Vane39aDEG					MinMax	0	359.9	0	0
9	Vane25aDEG					MinMax	0	359.9	0	0
10	Etemp3aDEGF					MinMax	-30	60	0	0
11	Batt3aVDC					MinMax	10.5	15	0	0
12	Turb39zNONE					MinMax	0	2	0	0
13	Turb25zNONE					MinMax	0	2	0	0
14	AnemSD39aMS					MinMax	0	4	0	0
15	AnemSD39bMS					MinMax	0	4	0	0
16	AnemSD25aMS					MinMax	0	4	0	0
17	AnemSD25bMS					MinMax	0	4	0	0
18	AnemSD39yMS					MinMax	0	4	0	0
19	AnemSD25yMS					MinMax	0	4	0	0
21	EtempSD3aDEGF					MinMax	-30	60	0	0
22	BattSD3aVDC					MinMax	0	5	0	0
200	VaneSD39aDEG	Anem39yMS				MinMaxT	0	100	100	10
201	VaneSD25aDEG	Vane25yMS				MinMaxT	0	100	100	10
300	Anem39aMS	AanemSD39aMS	Vane39aDEG	VaneSD39aDEG	Etemp3aDEGF	Icing	0.5	1	2	4
301	Anem39bMS	AanemSD39bMS	Vane39aDEG	VaneSD39aDEG	Etemp3aDEGF	Icing	0.5	1	2	4
302	Anem25aMS	AanemSD25aMS	Vane25aDEG	VaneSD25aDEG	Etemp3aDEGF	Icing	0.5	1	2	4
303	Anem25bMS	AanemSD25bMS	Vane25aDEG	VaneSD25aDEG	Etemp3aDEGF	Icing	0.5	1	2	4
400	Anem39aMS	Anem39bMS				Compare Sensors	1	0.25	3	0
401	Anem25aMS	Anem25bMS				Compare Sensors	1	0.25	3	0

**Sensor Statistics**

Sensor	Expected Data Points	Actual Data Points	% Data Recovered	Hours Out of Range	Hours of Icing	Hours of Fault	% Data Good
Etmp3aDEGF	13248	13248	100	0.167	0	1	99.947
Batt3aVDC	13248	13248	100	0.167	0	45.167	97.947
Anem39aMS	13248	13248	100	0.167	0	0	99.992
Anem25aMS	13248	13248	100	0.167	0	12.667	99.419
Vane39aDEG	13248	13248	100	0.833	0	0	99.962
Vane25aDEG	13248	13248	100	0.833	0	0	99.962
Total	105984	105984	100	2.333	0	58.833	99.654

## APPENDIX B - Plot Data

### Wind Speed Distribution Data

Bin Center Wind Speed [m/s]	Jun. 2009 – Aug. 2009 [%]
0.5	4.88
1.5	8.55
2.5	17.09
3.5	21.91
4.5	21.1
5.5	14.04
6.5	7.39
7.5	3.13
8.5	1.22
9.5	0.59
10.5	0.08
11.5	0.02
12.5	0
13.5	0
14.5	0
15.5	0
16.5	0
17.5	0
18.5	0
19.5	0
20.5	0
21.5	0
22.5	0
23.5	0
24.5	0

### Monthly Average Wind Speed Data

Date	Wind Speed at 39 m 10 min Average [m/s]
March	5.25
April	5.58
May	4.86
June	3.69
July	4.11
August	4.04

### **Diurnal Average Wind Speed Data**

Hour of Day	Jun. 2009 – Aug. 2009 Mean Wind Speed [m/s]
0.5	4.05
1.5	4.08
2.5	4.06
3.5	4.05
4.5	4.15
5.5	3.92
6.5	3.49
7.5	3.1
8.5	3.07
9.5	3.32
10.5	3.66
11.5	3.91
12.5	4.05
13.5	4.28
14.5	4.47
15.5	4.45
16.5	4.19
17.5	4.1
18.5	4.07
19.5	4.11
20.5	4.09
21.5	4.1
22.5	4.01
23.5	3.94

### Wind Rose Data

Direction	Jun. 2009 – Aug. 2009	
	Percent Time [%]	Mean Wind Speed [m/s]
N	6.51	3.76
NNE	7.05	4
NE	5.44	3.46
ENE	3.45	2.71
E	2.59	2.8
ESE	2.4	2.39
SE	3.22	2.58
SSE	10.35	3.68
S	7.56	3.89
SSW	4.6	4.23
SW	3.9	3.95
WSW	3.77	4.21
W	3.93	3.83
WNW	6.24	4.03
NW	14.06	4.59
NNW	14.94	4.67