

# LONG TERM SITE WIND DATA QUARTERLY REPORT

## Thompson Island

April 1, 2011 – June 30, 2010

Prepared for

Massachusetts Clean Energy Center  
55 Summer Street, 9th Floor  
Boston, MA 02110

by

Frederick Letson  
James F. Manwell  
Utama Abdulwahid  
Anthony F. Ellis

August 5, 2011

Report template version 1.0

---

---

Renewable Energy Research Laboratory  
University of Massachusetts, Amherst  
160 Governors Drive, Amherst, MA 01003  
[www.ceere.org/rerl](http://www.ceere.org/rerl) • (413) 545-4359 • [rerl@ecs.umass.edu](mailto:rerl@ecs.umass.edu)



## **NOTICE AND ACKNOWLEDGEMENTS**

This report was prepared by the Wind Energy Center (WEC) at the University of Massachusetts, Amherst in the course of performing work sponsored by the Renewable Energy Trust (RET), as administered by the Massachusetts Clean Energy Center (MassCEC). The opinions expressed in this report do not necessarily reflect those of MTC or the Commonwealth of Massachusetts, and reference to any specific product, service, process, or method does not constitute an implied or expressed recommendation or endorsement of it.

Further, MassCEC, the Commonwealth of Massachusetts, and the Wind Energy Center make no warranties or representations, expressed or implied, as to the fitness for particular purpose or merchantability of any product, apparatus, or service, or the usefulness, completeness, or accuracy of any processes, methods or other information contained, described, disclosed, or referred to in this report. MassCEC, the Commonwealth of Massachusetts, and the Wind Energy Center make no representation that the use of any product, apparatus, process, method, or other information will not infringe privately owned rights and will assume no liability for any loss, injury, or damage directly or indirectly resulting from, or occurring in connection with, the use of information contained, described, disclosed, or referred to in this report.

# TABLE OF CONTENTS

Notice and Acknowledgements .....	1
Table of Contents .....	2
Table of Figures .....	3
Executive Summary .....	4
SECTION 1 - Station Location .....	5
SECTION 2 - Instrumentation and Equipment .....	6
SECTION 3 - Data Summary .....	7
SECTION 4 - Graphs .....	9
Wind Speed Time Series .....	10
Wind Speed Distributions .....	10
Monthly Average Wind Speeds .....	11
Diurnal Average Wind Speeds .....	11
Turbulence Intensities .....	12
Wind Roses .....	13
SECTION 5 - Significant Meteorological Events .....	14
SECTION 6 - Data Collection and Maintenance .....	14
SECTION 7 - Data Recovery and Validation .....	14
Test Definitions .....	14
Sensor Statistics .....	15
APPENDIX A - Sensor Performance Report .....	17
Test Definitions .....	17
Sensor Statistics .....	18
APPENDIX B - Plot Data .....	18
Wind Speed Distribution Data .....	18
Monthly Average Wind Speed Data .....	19
Diurnal Average Wind Speed Data .....	19
Wind Rose Data .....	20

## TABLE OF FIGURES

Figure 1 - Site location on Thompson Island.....	5
Figure 2 - Monitoring Station/Data Equipment at Thompson Island .....	6
Figure 3 – Wind Speed Time Series .....	10
Figure 4 – Wind Speed Distribution .....	10
Figure 5 – Monthly Average Wind Speed .....	11
Figure 6 – Diurnal Average Wind Speeds .....	11
Figure 7 – Turbulence Intensity .....	12
Figure 8 – Wind Rose .....	13

## EXECUTIVE SUMMARY

All the work presented in this Wind Data Report including installation and decommissioning of the meteorological tower and instrumentation, and the data analysis and reporting was performed by the Wind Energy Center (WEC) at the University of Massachusetts, Amherst.

Wind monitoring equipment was first installed at Thompson Island in 1998. Due to planned construction by the Outward Bound School on the island, the monitoring tower was relocated in November 2001 from a central, inland site, to the current site, which is closer to the western shoreline, 4 m (13 ft) above sea level. Anemometers and wind direction vanes are installed at 25 and 40 m (82 and 131 ft) above the tower base. A temperature sensor is installed near the base.

During the period covered by this quarterly report, April, 2011 – June, 2011, the mean recorded wind speed at 40 m was 5.74 m/s (12.8 mph) and the prevailing wind direction was from the South-Southwest. The average turbulence intensity measured at wind speeds near 10 m/s at 40 m was 0.13. The gross data recovery percentage (the actual percentage of expected data received) was 100% and the net data recovery percentage (the percentage of expected data which passed all of the quality assurance tests) was 83.1%. The majority of the missing data were due to the failure of the primary anemometer at each of the two measurement heights.


Additional information about interpreting the data presented in this report can be found in the Fact Sheet, “Interpreting Your Wind Resource Data,” produced by the Renewable Energy Research Lab (RERL) and the Massachusetts Technology Collaborative (MTC). This document is found through the RERL website:

[http://www.ceere.org/rerl/about\\_wind/RERL\\_Fact\\_Sheet\\_6\\_Wind\\_resource\\_interpretation.pdf](http://www.ceere.org/rerl/about_wind/RERL_Fact_Sheet_6_Wind_resource_interpretation.pdf)

\* 1 m/s = 2.237 mph.

## SECTION 1 - Station Location

Thompson Island is located in Boston Harbor, approx 2 ½ miles south of Logan Airport. It is home to the Outward Bound School of Boston. The 40 m (131 ft) monitoring tower is located at 42°-18'-54.1" North, 071°-00'-44.7" West (see Figure 1). The location is near the western shore of the island, located on a small bluff, 4 m (13 ft) above sea level.

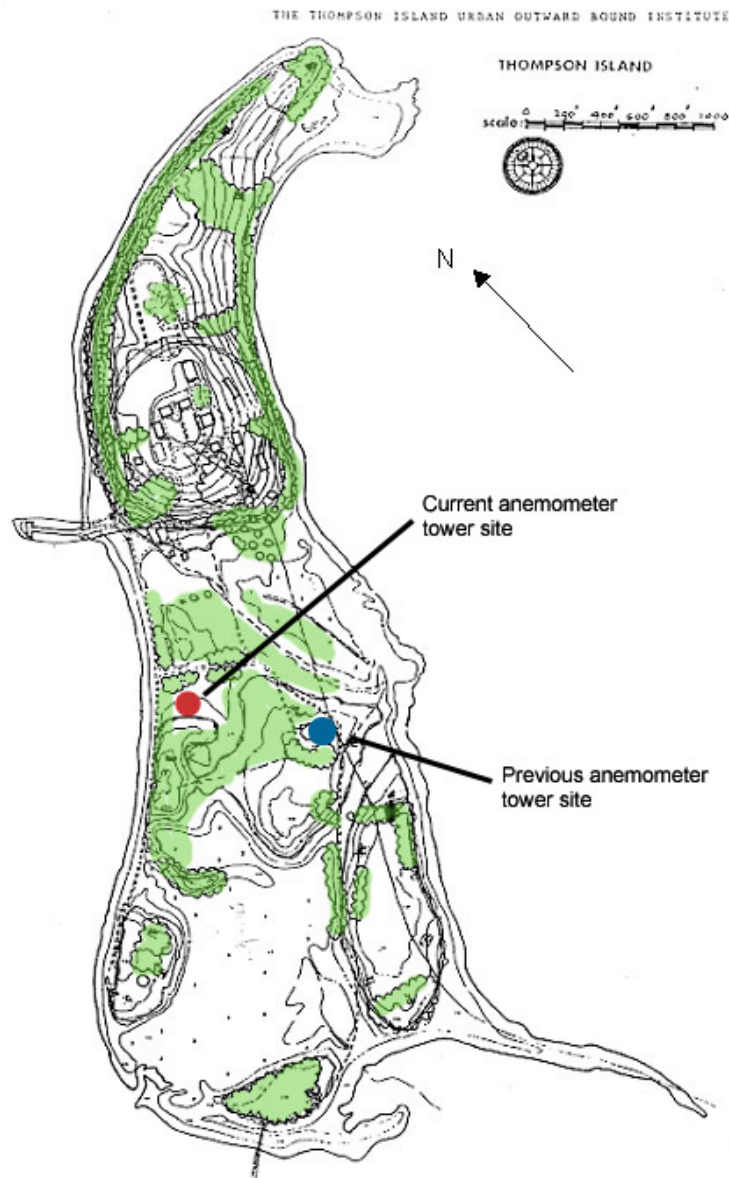

**Figure 1 - Site location on Thompson Island**

## SECTION 2 - Instrumentation and Equipment

The 40 m (131 ft) monitoring tower and associated equipment are supplied by NRG systems, with the exceptions of custom made anemometer booms, temperature sensor, and the FAA-approved L-810 warning light. The wind speed and direction were measured at both 25 and 40 m (82 and 131 ft) height. The monitoring equipment (Figure 2) consists of the following items:

- Symphonie ® Data Logger
- Electrical enclosure box with 5 watt PV panel
- NRG 40m tower, 4.5” diameter model
- 3 – NRG Max 40 Anemometers, 2 at 25 meters and 1 at 39 meters
- 1 – RISO anemometer at 39 meters
- 2 - #200P Wind direction vanes, located at 25 and 39 meters
- 1- Custom temp sensor (Slope 0.1356, Offset -17.78)
- 3 – Sensor booms, 54” length at 25 m
- 3 - Sensor booms, 44” length at 39 m
- Lightning rod and grounding cable
- Shielded sensor wire



**Figure 2 - Monitoring Station/Data Equipment at Thompson Island**

## SECTION 3- Data Summary

A summary of the wind speeds and wind directions measured during the reporting period is included in Table 1. Table 1 includes the mean wind speeds measured at each measurement height, the maximum instantaneous wind speed measured at each measurement height and the prevailing wind direction measured at each measurement height. These values are provided for each month of the reporting period and for the whole reporting period.

**Table 1. Wind Speed and Direction Data Summary**

	Month	Mean Wind Speed [m/s]	Max Wind Speed [m/s]	NDR [%]	Prevailing Direction [deg]	NDR [%]
39 meters	Apr-11	6.43	15.82	99.81%	WNW	100%
	May-11	5.64	17.44	99.24%	NE	99.96%
	Jun-11	5.15	16.12	99.38%	E	99.98%
	Quarter	5.74	17.44	99.47%	E	99.98%
25 meters	Apr-11	6.16	15.73	99.77%	SSW	99.98%
	May-11	5.21	17.07	98.07%	NE	99.96%
	Jun-11	4.76	14.97	98.63%	E	100%
	Quarter	5.38	17.07	98.82%	E	99.98%

Wind data statistics in the table are reported when more than 90% of the data during the reporting period that are valid. In cases when a larger amount of data are missing, the percent of the available data that are used to determine the data statistics is noted. No measurement of wind speed or direction can be perfectly accurate. Wind speed measurement errors occur due to anemometer manufacturing variability, anemometer calibration errors, the response of anemometers to turbulence and vertical air flow and due to air flows caused by the anemometer mounting system. Every effort is made to reduce the sources of these errors. Nevertheless, the values reported in this report have an expected uncertainty of about  $\pm 2\%$  or  $\pm 0.2$  m/s, whichever is greater. Wind direction measurement errors occur due to sensor measurement uncertainty, tower effects, boom alignment measurement errors and twisting of pipe sections during the raising of a pipe tower. Efforts are also made to reduce these errors, but the reported wind directions are estimated to have an uncertainty of  $\pm 5$  degrees.

A summary of the turbulence intensity and mean wind shear measured at each measurement height during the reporting period is included in Table 2. These values are provided for each month of the reporting period and for the whole reporting period. Turbulence Intensity is calculated by dividing the standard deviation of the wind speed



by the mean wind speed and is a measure of the gustiness of a wind resource. Lower turbulence results in lower mechanical loads on a wind turbine. Turbulence intensity varies with wind speed. The average turbulence intensity presented in Table 2 is the mean turbulence intensity when the wind speed at each measurement height is between 10 and 11 m/s.

Shear coefficients provide a measure of the change in wind speed with height. When data at multiple heights are available, shear coefficients,  $\alpha$ , have been determined. They can be used in the following formula to estimate the average wind speed,  $U(z)$ , at height  $z$ , when the average wind speed,  $U(z_r)$ , at height  $z_r$  is known:

$$U(z) = U(z_r) \left( \frac{z}{z_r} \right)^\alpha$$

The change in wind speed with height is a very complicated relationship related to atmospheric conditions, wind speed, wind direction, time of day and time of year. This formula will not always provide the correct answer at any given site. Nevertheless the calculated shear coefficient, based on measurements at two heights, can be used to characterize the degree of increase in wind speed with height at a site.

The mean wind shear coefficient that is provided here is calculated based on the mean wind speeds in Table 1, where  $z_{high}$  and  $z_{low}$  are the heights of the higher and lower mean wind speeds used in the calculation and  $U(z_{low})$  and  $U(z_{high})$  are the mean wind speeds at the two heights.

$$\alpha = \log \left( \frac{U(z_{high})}{U(z_{low})} \right) / \log \left( \frac{z_{high}}{z_{low}} \right)$$

**Table 2. Shear and Turbulence Intensity Data Summary**

	Month	TI at 10 m/s [-]	NDR [%]	Mean Wind Shear Coefficient Between 39 and 25 meters
39 meters	Apr-11	0.136	99.81%	0.09792 NDR: 99.77%
	May-11	0.1188	99.24%	0.1785 NDR: 98.07%
	Jun-11	0.1501	99.38%	0.176 NDR: 98.63%
	Quarter	0.133	99.47%	0.1467 NDR: 98.82%
25 meters	Apr-11	0.1451	99.77%	
	May-11	0.1299	98.07%	
	Jun-11	0.1666	98.63%	
	Quarter	0.1444	98.82%	

## SECTION 4- Graphs

This report contains several types of wind data graphs. Unless otherwise noted, each graph represents data from 1 quarter (3 months). The following graphs are included:

- Time Series – 10-minute average wind speeds are plotted against time.
- Wind Speed Distribution – A histogram plot giving the percentage of time that the wind is at a given wind speed.
- Monthly Average – A plot of the monthly average wind speed over the three-month period. This graph shows the trends in the wind speed over the year.
- Diurnal – A plot of the average wind speed for each hour of the day.
- Turbulence Intensity – A plot of turbulence intensity as a function of wind speed. Turbulence Intensity is calculated as the standard deviation of the wind speed divided by the wind speed and is a measure of the gustiness of a wind resource. Lower turbulence results in lower mechanical loads on a wind turbine.
- Wind Rose – A plot, by compass direction showing the percentage of time that the wind comes from a given direction and the average wind speed in that direction.

With regards to the Thompson Island site, the following observations are noted.

- Time Series, Figure 3: shows that wind speed data are available throughout the reporting period
- Wind Speed Distribution, Figure 4: wind speeds are primarily between 3 and 7 m/s during this reporting period.
- Monthly Average, Figure 5: shows that monthly average wind speeds are between 5 and 7.5 m/s for this
- Diurnal, Figure 6: shows that on average the wind speed was fairly constant. The wind speed was slightly higher during the evening hours.
- Turbulence Intensity, Figure 7: we can see the turbulence numbers roughly cluster between 0.1 and 0.3 for most wind speeds.
- Wind Rose, Figure 8: shows that the prevailing winds at this site were from the East and South-Southeast during this reporting period.

Data for the wind speed histograms, monthly and diurnal average plots, and wind roses are included in APPENDIX B.

### Wind Speed Time Series

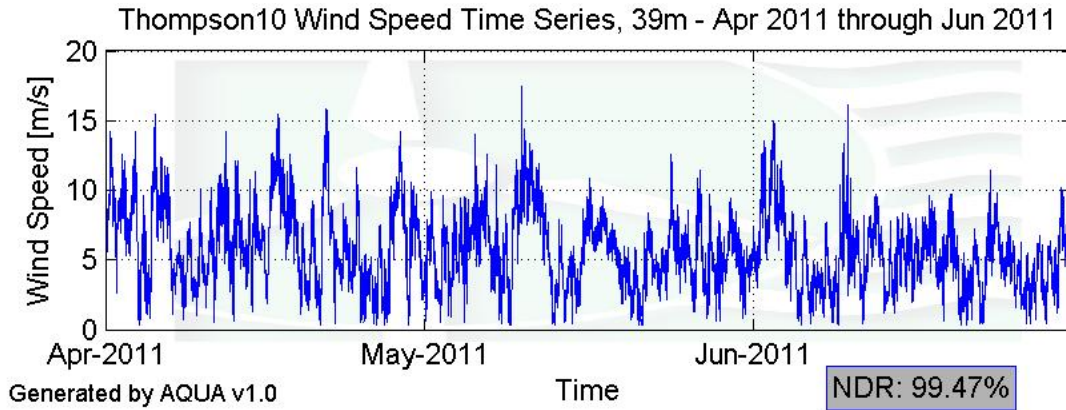


Figure 3 – Wind Speed Time Series

### Wind Speed Distributions

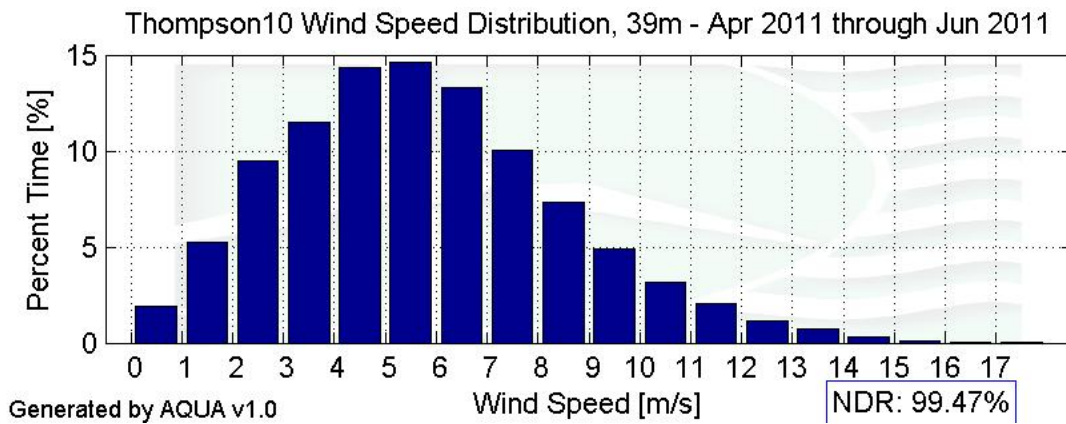


Figure 4 – Wind Speed Distribution

### Monthly Average Wind Speeds

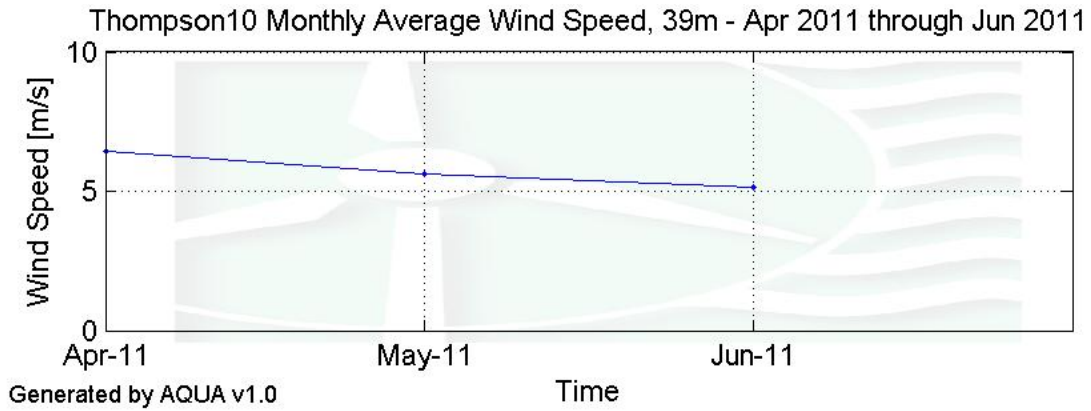


Figure 5 – Monthly Average Wind Speed

### Diurnal Average Wind Speeds

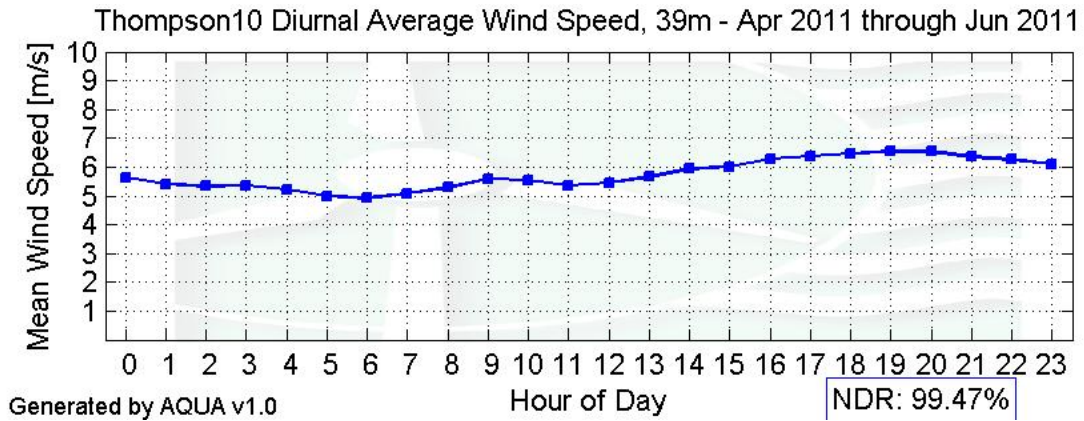


Figure 6 – Diurnal Average Wind Speeds

## Turbulence Intensities


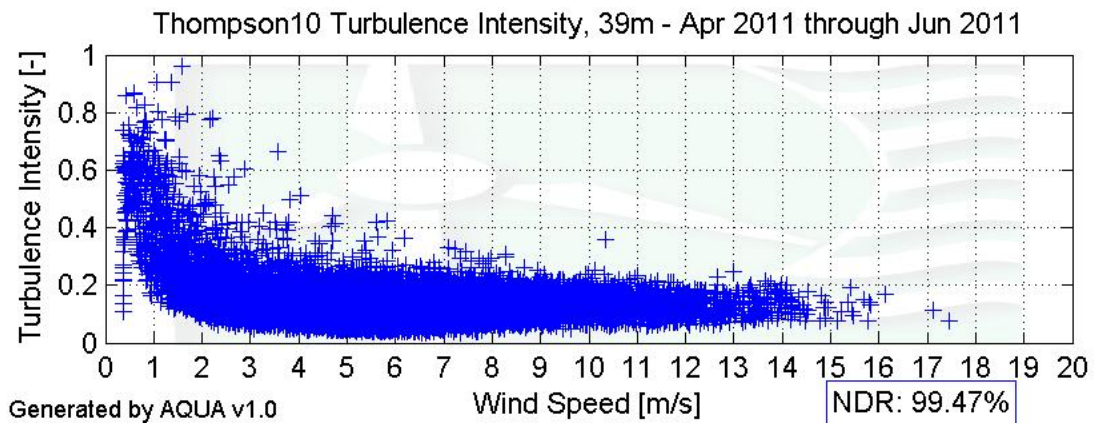


Figure 7 – Turbulence Intensity

## Wind Roses

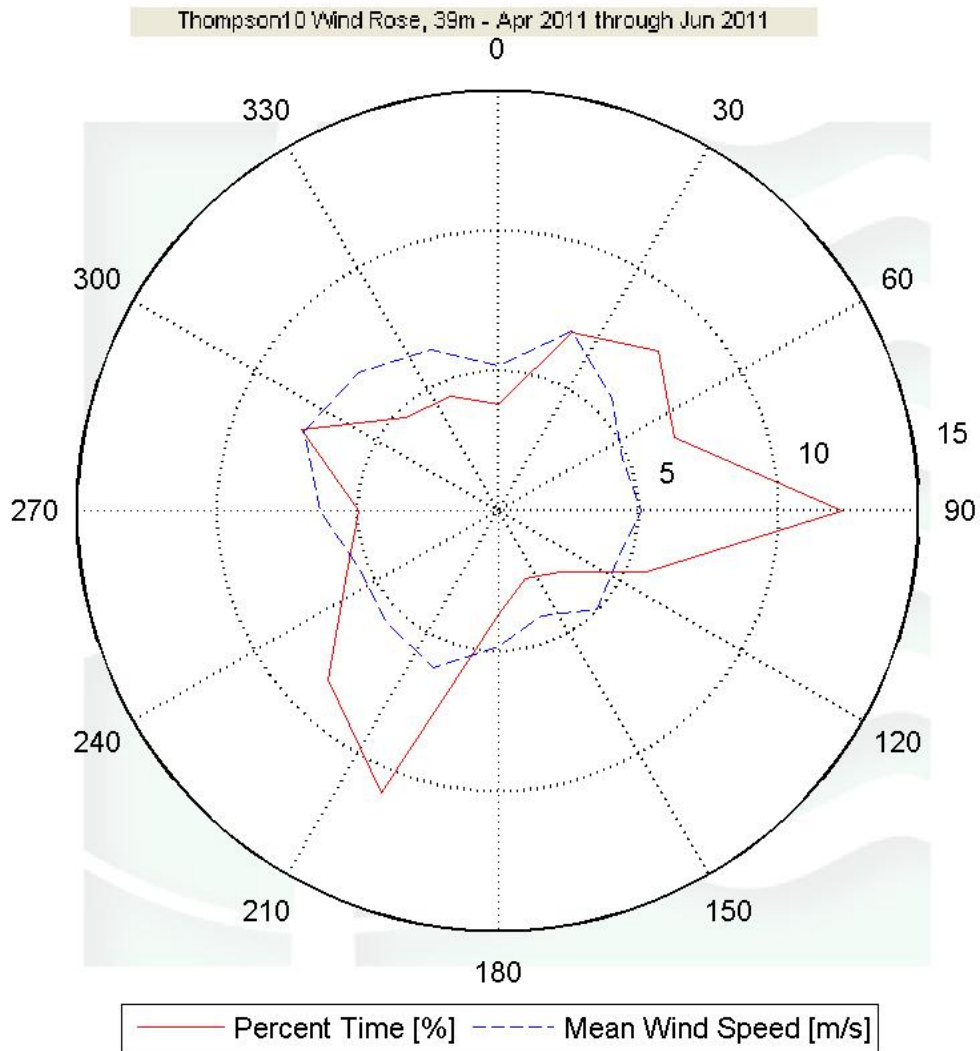

Generated by AQUA v1.0

NDR: 99.45%

Figure 8 – Wind Rose

## SECTION 5 - Significant Meteorological Events

No meteorological events occurred in this reporting period in the vicinity of Thompson Island that were significant enough to affect yearly statistics.

## SECTION 6 - Data Collection and Maintenance

Primary wind speed sensors at each height failed during the Fall of 2010 and remain non-functional throughout this reporting period

## SECTION 7 - Data Recovery and Validation

All raw wind data are subjected to a series of tests and filters to weed out data that are faulty or corrupted. Definitions of these quality assurance (QA) controls are given below under Test Definitions and Sensor Statistics. These control filters were designed to automate the quality control process and used many of the previous hand-worked data sets made at UMass to affect a suitable emulation. The gross percentage of data recovered (ratio of the number of raw data points received to data points expected) and net percentage (ratio of raw data points which passed all QA control tests to data points expected) are shown below.

Gross Data Recovered [%]	100
Net Data Recovered [%]	83.14

### Test Definitions

All raw data were subjected to a series of validation tests, as described below. The sensors tested and the parameters specific to each sensor are given in the Sensor Performance Report which is included in APPENDIX A. Data which were flagged as invalid were not included in the statistics presented in this report.

**MinMax Test:** All sensors are expected to report data values within a range specified by the sensor and logger manufacturers. If a value falls outside this range, it is flagged as invalid. A data value from the sensor listed in Test Field 1 (TF1) is flagged if it is less than Factor 1 (F1) or greater than Factor 2. This test has been applied to the following sensors (as applicable): wind speed, wind speed standard deviation, wind direction, temperature, and solar insolation.

$$F1 > TF1 > F2$$

**MinMaxT Test:** This is a MinMax test for wind direction standard deviation with different ranges applied for high and low wind speeds. A wind direction standard

deviation data value (TF1) is flagged either if it is less than Factor 1, if the wind speed (TF2) is less than Factor 4 and the wind direction standard deviation is greater than Factor 2, or if the wind speed is greater than or equal to Factor 4 and the wind direction standard deviation is greater than Factor 3.

$$\begin{aligned} & (TF1 < F1) \\ & \text{or } (TF2 < F4 \text{ and } TF1 > F2) \\ & \text{or } (TF2 \geq F4 \text{ and } TF1 > F3) \end{aligned}$$

**Icing Test:** An icing event occurs when ice collects on a sensor and degrades its performance. Icing events are characterized by the simultaneous measurements of near-zero standard deviation of wind direction, non-zero wind speed, and near- or below-freezing temperatures. Wind speed, wind speed standard deviation, wind direction, and wind direction standard deviation data values are flagged if the wind direction standard deviation (CF1) is less than or equal to Factor 1 (F1), the wind speed (TF1) is greater than Factor 2 (F2), and the temperature (CF2) is less than Factor 3 (F3). To exit an icing event, the wind direction standard deviation must be greater than Factor 4.

$$CF1 \leq F1 \text{ and } TF1 > F2 \text{ and } CF2 < F3$$

**CompareSensors Test:** Where primary and redundant sensors are used, it is possible to determine when one of the sensors is not performing properly. For anemometers, poor performance is characterized by low data values. Therefore, if one sensor of the pair reports values significantly below the other, the low values are flagged. At low wind speeds (Test Fields 1 and 2 less than or equal to Factor 3) wind speed data are flagged if the absolute difference between the two wind speeds is greater than Factor 1. At high wind speeds (Test Fields 1 or 2 greater than Factor 3) wind speed data are flagged if the absolute value of the ratio of the two wind speeds is greater is greater than Factor 2.

$$\begin{aligned} & [ TF1 \leq F3 \text{ and } TF2 \leq F3 \text{ and } \text{abs}(TF1 - TF2) > F1 ] \\ & \text{or } [ (TF1 > F3 \text{ or } TF2 > F3) \text{ and } (\text{abs}(1 - TF1 / TF2) > F2 \text{ or } \text{abs}(1 - TF2 / TF1) > F2) ] \end{aligned}$$

### Sensor Statistics

A summary of the results of the data collection and filtering are given in the Sensor Performance Report which is included in APPENDIX A. The following categories of information, tabulated for each sensor, are included in that report.

**Expected Data Points:** the total number of sample intervals between the start and end dates (inclusive).

**Actual Data Points:** the total number of data points recorded between the start and end dates.



**% Data Recovered:** the ratio of actual and expected data points (this is the *gross data recovered percentage*).

**Hours Out of Range:** total number of hours for which data were flagged according to MinMax and MinMaxT tests. These tests flag data which fall outside of an expected range.

**Hours of Icing:** total number of hours for which data were flagged according to Icing tests. This test uses the standard deviation of wind direction, air temperature, and wind speed to determine when sensor icing has occurred.

**Hours of Fault:** total number of hours for which data were flagged according to CompareSensors tests. These tests compare two sensors (e.g. primary and redundant anemometers installed at the same height) and flag data points where one sensor differs significantly from the other.

**% Data Good:** the filter results are subtracted from the gross data recovery percentage to yield the *net data recovered percentage*.

# APPENDIX A - Sensor Performance Report

## Test Definitions

Test Order	TestField1	TestField2	TestField3	CalcField1	CalcField2	CalcField3	TestType	Factor1	Factor2	Factor3	Factor4
1	Temp2a>T_val						MinMax	-30	60	0	0
2	anem25a>WS_val						MinMax	0	90	0	0
3	anem25a>WS_SD						MinMax	0	4	0	0
4	anem25a>WS_min						MinMax	0	90	0	0
5	anem25a>WS_max						MinMax	0	90	0	0
6	anem25b>WS_val						MinMax	0	90	0	0
7	anem25b>WS_SD						MinMax	0	4	0	0
8	anem25b>WS_min						MinMax	0	90	0	0
9	anem25b>WS_max						MinMax	0	90	0	0
10	vane25a>WD_val						MinMax	0	359.9	0	0
11	vane25a>WD_SD						MinMax	0	100	0	0
12	vane25b>WD_val						MinMax	0	359.9	0	0
13	vane25b>WD_SD						MinMax	0	100	0	0
14	max40a>WS_val						MinMax	0	90	0	0
15	max40a>WS_SD						MinMax	0	4	0	0
16	max40a>WS_min						MinMax	0	90	0	0
17	max40a>WS_max						MinMax	0	90	0	0
18	max40b>WS_val						MinMax	0	90	0	0
19	max40b>WS_SD						MinMax	0	4	0	0
20	max40b>WS_min						MinMax	0	90	0	0
21	max40b>WS_max						MinMax	0	90	0	0
22	anem39a>WS_val						MinMax	0	90	0	0
23	anem39a>WS_SD						MinMax	0	4	0	0
24	anem39a>WS_min						MinMax	0	90	0	0
25	anem39a>WS_max						MinMax	0	90	0	0
26	anem39b>WS_val						MinMax	0	90	0	0
27	anem39b>WS_SD						MinMax	0	4	0	0
28	anem39b>WS_min						MinMax	0	90	0	0
29	anem39b>WS_max						MinMax	0	90	0	0
30	vane39a>WD_val						MinMax	0	359.9	0	0
31	vane39a>WD_SD						MinMax	0	100	0	0
32	vane39b>WD_val						MinMax	0	359.9	0	0
33	vane39b>WD_SD						MinMax	0	100	0	0
34	anem25a>WS_val	anem25b>WS_val					CompareSensors	1	0.25	3	0
35	max40a>WS_val	max40b>WS_val					CompareSensors	1	0.25	3	0
36	anem39a>WS_val	anem39b>WS_val					CompareSensors	1	0.25	3	0
37	anem25a>WS_val	anem25a>WS_SD	vane25a>WD_val	vane25a>WD_SD	Temp2a>T_val		Icing	0.5	1	2	4
38	anem25b>WS_val	anem25b>WS_SD	vane25a>WD_val	vane25a>WD_SD	Temp2a>T_val		Icing	0.5	1	2	4
39	anem25a>WS_val	anem25a>WS_SD	vane25b>WD_val	vane25b>WD_SD	Temp2a>T_val		Icing	0.5	1	2	4
40	anem25b>WS_val	anem25b>WS_SD	vane25b>WD_val	vane25b>WD_SD	Temp2a>T_val		Icing	0.5	1	2	4
41	anem39a>WS_val	anem39a>WS_SD	vane39a>WD_val	vane39a>WD_SD	Temp2a>T_val		Icing	0.5	1	2	4
42	anem39b>WS_val	anem39b>WS_SD	vane39a>WD_val	vane39a>WD_SD	Temp2a>T_val		Icing	0.5	1	2	4
43	anem39a>WS_val	anem39a>WS_SD	vane39b>WD_val	vane39b>WD_SD	Temp2a>T_val		Icing	0.5	1	2	4
44	anem39b>WS_val	anem39b>WS_SD	vane39b>WD_val	vane39b>WD_SD	Temp2a>T_val		Icing	0.5	1	2	4

### Sensor Statistics

	Expected Data Points	Actual Data Points	% Data Recovered	Hours Out of Range	Hours of Icing	Hours of Fault	%Data Good
temp2a	13104	13104	100	0	0	0	100
batt2a	13104	13104	100	0	0	0	100
anem25a	13104	13104	100	1857.333	0	173.167	7.028
anem25b	13104	13104	100	25.833	0	0	98.817
vane25a	13104	13104	100	0.5	0	0	99.977
anem39a	13104	13104	100	641.167	0	231	60.066
anem39b	13104	13104	100	15.5	0	0	99.29
vane39a	13104	13104	100	0.5	0	0	99.977
Total	104832	104832	100	2540.833	0	404.167	83.144

## APPENDIX B- Plot Data

### Wind Speed Distribution Data

Bin Center Wind Speed [m/s]	Jan-Mar Percent Time [%]
0.5	1.89
1.5	5.21
2.5	9.47
3.5	11.46
4.5	14.31
5.5	14.60
6.5	13.26
7.5	10.07
8.5	7.33
9.5	4.93
10.5	3.18
11.5	2.06
12.5	1.15
13.5	0.71
14.5	0.28
15.5	0.08
16.5	0.01
17.5	0.02

### **Monthly Average Wind Speed Data**

Month	Wind Speed at 39 m 10 min Average [m/s]
Jan-11	6.43
Feb-11	5.64
Mar-11	5.15

### **Diurnal Average Wind Speed Data**

Hour of Day	Jan-Mar. Mean Wind Speed [m/s]
0	5.62
1	5.40
2	5.34
3	5.36
4	5.21
5	5.00
6	4.91
7	5.08
8	5.28
9	5.58
10	5.55
11	5.35
12	5.46
13	5.66
14	5.93
15	6.01
16	6.29
17	6.38
18	6.47
19	6.54
20	6.55
21	6.36
22	6.26
23	6.11

### Wind Rose Data

Bin Center [deg]	Jan-Mar	
	Percent Time [%]	Mean Wind Speed [m/s]
0	3.80	5.16
22.5	6.88	6.93
45	8.10	5.74
67.5	6.81	4.81
90	12.28	5.09
112.5	5.75	4.63
135	3.12	4.99
157.5	2.60	4.07
180	3.71	4.86
202.5	10.90	6.08
225	8.56	5.62
247.5	5.85	5.37
270	4.95	6.36
292.5	7.60	7.46
315	4.68	7.02
337.5	4.43	6.23