

WIND DATA REPORT

Mattapoissett, Massachusetts

December 1, 2005 - February 28, 2006

Prepared for

Massachusetts Technology Collaborative
75 North Drive
Westborough, MA 01581

by

William L.W. Henson
James F. Manwell
Anthony L. Rogers
Anthony F. Ellis

April 13, 2006

Report template version 2.0

Renewable Energy Research Laboratory
University of Massachusetts, Amherst
160 Governors Drive, Amherst, MA 01003
www.ceere.org/rerl • (413) 545-4359 • rerl@ecs.umass.edu



NOTICE AND ACKNOWLEDGEMENTS

This report was prepared by the Renewable Energy Research Laboratory (RERL) at the University of Massachusetts, Amherst in the course of performing work sponsored by the Renewable Energy Trust (RET), as administered by the Massachusetts Technology Collaborative (MTC), pursuant to work order number 05-1. The opinions expressed in this report do not necessarily reflect those of MTC or the Commonwealth of Massachusetts, and reference to any specific product, service, process, or method does not constitute an implied or expressed recommendation or endorsement of it.

Further, MTC, the Commonwealth of Massachusetts, and RERL make no warranties or representations, expressed or implied, as to the fitness for particular purpose or merchantability of any product, apparatus, or service, or the usefulness, completeness, or accuracy of any processes, methods or other information contained, described, disclosed, or referred to in this report. MTC, the Commonwealth of Massachusetts, and the contractor make no representation that the use of any product, apparatus, process, method, or other information will not infringe privately owned rights and will assume no liability for any loss, injury, or damage directly or indirectly resulting from, or occurring in connection with, the use of information contained, described, disclosed, or referred to in this report.

TABLE OF CONTENTS

Notice and Acknowledgements	1
Table of Contents	2
Table of Figures	3
Executive Summary	4
SECTION 1 - Station Location	5
SECTION 2 - Instrumentation and Equipment	6
SECTION 3 - Data Collection and Maintenance	6
SECTION 4 - Significant Meteorological Events	8
SECTION 5 - Data Recovery and Validation	8
Test Definitions	8
Sensor Statistics	9
SECTION 6 - Data Summary	10
SECTION 7 - Graphs	12
Wind Speed Time Series	12
Wind Speed Distributions	13
Monthly Average Wind Speeds	14
Diurnal Average Wind Speeds	15
Turbulence Intensities	16
Wind Roses	17
APPENDIX A - Sensor Performance Report	18
Test Definitions	18
Sensor Statistics	19
APPENDIX B - Plot Data	20
Wind Speed Distribution Data	20
Monthly Average Wind Speed Data	20
Diurnal Average Wind Speed Data	21
Wind Rose Data	22

TABLE OF FIGURES

Figure 1 Topographic Map Showing Mattapoisett Site Location--Source Topozone.com	5
Figure 2 – Wind Speed Time Series, Jan 20, 2006 through Feb 28, 2006	12
Figure 3 – Wind Speed Distribution, Jan 20, 2006 through Feb 28, 2006	13
Figure 4 – Monthly Average Wind Speed, Feb 2006	14
Figure 5 – Diurnal Average Wind Speed, Jan 20, 2006 through Feb 28, 2006	15
Figure 6 – Turbulence Intensity, Jan 20, 2006 through Feb 28, 2006	16
Figure 7 – Wind Rose, Jan 20, 2006 through Feb 28, 2006	17

EXECUTIVE SUMMARY

All the work presented in this Wind Data Report including installation and decommissioning of the meteorological tower and instrumentation, and the data analysis and reporting was performed by the Renewable Energy Research Laboratory (RERL) at the University of Massachusetts, Amherst.

This report covers wind data measured at a meteorological tower installed near the South Shore Marshes Wildlife Management Area in the town of Mattapoisett, MA. Installed on January 20th, 2006, the wind monitoring station has been in continuous operation to this day. Two sets of two anemometers and one wind vane are mounted at 49 m (160.8 ft) and 38 m (124.7 ft), and an additional anemometer and vane are mounted at 20 m (65.6 ft). Reports are made on a quarterly basis; and this report is the first such report for Mattapoisett.

The season covered by this report is December 2005 – February 2006 (winter quarter). However, since the tower was not erected until January 20th, 2006, this report contains only one calendar month of data for the winter quarter time period (i.e. February). Statistics for the available dataset (Jan 20—Feb 28) are presented in this report, though care is advised when comparing with statistics from other sites that may possess an entire winter quarter’s worth of data. The mean recorded wind speed for this period was 6.13 m/s (13.71 mph)¹ and the prevailing wind direction was from the WNW. The gross data recovery percentage (the actual percentage of expected data received) was 100% and the net data recovery percentage (the percentage of expected data which passed all of the quality assurance tests) was 97.61%—more than adequate for the purpose of gaining an understanding of the wind resources in Mattapoisett, Massachusetts.

Additional information about interpreting the data presented in this report can be found in the Fact Sheet, “Interpreting Your Wind Resource Data,” produced by RERL and the Massachusetts Technology Collaborative (MTC). This document is found through the RERL website:

http://www.ceere.org/rerl/about_wind/RERL_Fact_Sheet_6_Wind_resource_interpretation.pdf

* 1 m/s = 2.237 mph.

¹ 1m/s=2.237 mph

SECTION 1 - Station Location

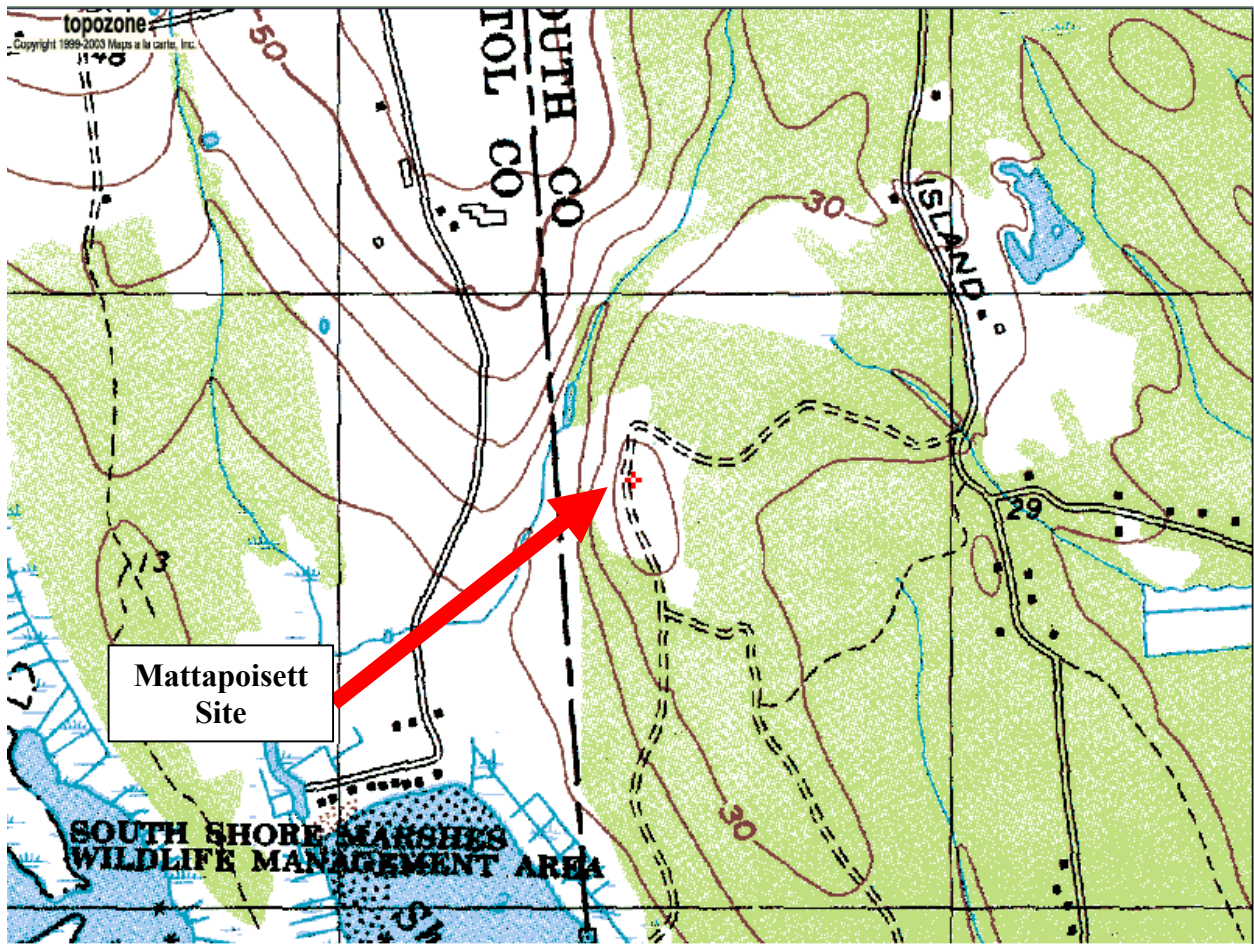


Figure 1 Topographic Map Showing Mattapoisett Site Location--Source Topozone.com

The Mattapoisett site is located near the South Shore Marshes Wildlife Management Area in Mattapoisett, MA. Latitude and Longitude are $41^{\circ} 38.11'N$ and $70^{\circ} 49.53'W$, respectively, using the NAD 83 datum.

SECTION 2 - Instrumentation and Equipment

The wind monitoring equipment is mounted on a 49 m (164.0 ft) NRG tower. All other monitoring equipment comes from NRG Systems, and consists of the following items:

- Symphonie Data Logger
- Electrical enclosure box
- 5 – #40 Anemometers, standard calibration (Slope - 0.765 m/s, Offset – 0.349 m/s). Two anemometers are located at 49 m (160.8 ft), two at 38 m (124.7 ft) and one at a height of 20 m (65.6 ft).
- 3 - #200P Wind direction vanes. They are located at heights of 49 m (160.8 ft), 38 m (124.7 ft) and 20 m (65.6 ft) each.
- 5 – Sensor booms, 54” length
- Lightning rod and grounding cable
- Shielded sensor wire

The data from the Symphonie logger is mailed to the Renewable Energy Research Laboratory at the University of Massachusetts, Amherst on a regular basis. The logger samples wind speed and direction once every two seconds. These data are then combined into 10-minute averages and, along with the standard deviation for those 10-minute periods, are put into a binary file. These binary files are converted to ASCII text files using the NRG software BaseStation®. These text files are then imported into a database software program where they are subjected to quality assurance (QA) tests prior to using the data.

SECTION 3 - Data Collection and Maintenance

The following maintenance/equipment problems occurred during the report period, and the following corrective actions taken:

- Some short-duration sensor-icing events.
- No maintenance operations were needed or performed.

Given that the tower was installed on January 20th, 2006, only February has a full month of data to report for this quarter consisting of December, January, and February.

Data Statistics Summary

Date	Mean Wind Speed	Max Wind Speed	Turbulence Intensity	Prevailing Wind Direction	Mean Wind Speed	Max Wind Speed	Turbulence Intensity	Prevailing Wind Direction	Mean Wind Speed	Max Wind Speed	Turbulence Intensity	Prevailing Wind Direction	Wind Shear Coefficient
Height units	49 m, [m/s]	49 m, [m/s]	49 m, []	49 m, []	38 m, [m/s]	38 m, [m/s]	38 m, []	38 m, []	20 m, [m/s]	20 m, [m/s]	20 m, []	20 m, []	49m - 38m []
Dec 2005	--	--	--	--	--	--	--	--	--	--	--	--	---
Jan 2006	--	--	--	--	--	--	--	--	--	--	--	--	--
Feb 2006	6.78	18	0.16	WNW	6.22	17	0.18	ESE	4.9	13.1	0.24	WNW	0.39
Dec '05 – Feb '06	6.13	18	0.16	WNW	5.64	17	0.18	WNW	4.41	13.1	0.24	WNW	0.38

Wind data statistics in the table are reported when more than 90% of the data during the reporting period are valid. In cases when a larger amount of data are missing, the percent of the available data that are used to determine the data statistics is noted.

No measurement of wind speed can be perfectly accurate. Errors occur due to anemometer manufacturing variability, anemometer calibration errors, the response of anemometers to turbulence and vertical air flow and due to air flows caused by the anemometer mounting system. Every effort is made to reduce the sources of these errors. Nevertheless, the values reported in this report have an expected uncertainty of about $\pm 2\%$ or ± 0.2 m/s, whichever is greater.

When data at multiple heights are available, shear coefficients, α , have been determined—in this case from the anemometry located at 49 m and 38 m. They can be used in the following formula to estimate the average wind speed, $U(z)$, at height z , when the average wind speed, $U(z_r)$, at height z_r is known:

$$U(z) = U(z_r) \left(\frac{z}{z_r} \right)^\alpha$$

The change in wind speed with height is a very complicated relationship related to atmospheric conditions, wind speed, wind direction, time of day and time of year. This formula may not provide the correct answer at any given site. Nevertheless the calculated shear coefficient, based on measurements at two heights, can be used to characterize the degree of increase in wind speed with height at a site.

SECTION 4 - Significant Meteorological Events

December 2005, January 2006 and February 2006 were slightly windier than in previous years; however, there were no major meteorological events that would have caused notable fluctuations in wind speed measurements.

Source: <http://www.erh.noaa.gov/box/MonthlyClimate2.shtml>

SECTION 5 - Data Recovery and Validation

All raw wind data are subjected to a series of tests and filters to weed out data that are faulty or corrupted. Definitions of these quality assurance (QA) controls are given below under Test Definitions and Sensor Statistics. These control filters were designed to automate the quality control process and used many of the previous hand-worked data sets made at UMass to affect a suitable emulation. The gross percentage of data recovered (ratio of the number of raw data points received to data points expected) and net percentage (ratio of raw data points which passed all QA control tests to data points expected) are shown below.

Gross Data Recovered [%]	100%
Net Data Recovered [%]	97.613%

Test Definitions

All raw data were subjected to a series of validation tests, as described below. The sensors tested and the parameters specific to each sensor are given in the Sensor Performance Report which is included in APPENDIX A. Data which were flagged as invalid were not included in the statistics presented in this report.

MinMax Test: All sensors are expected to report data values within a range specified by the sensor and logger manufacturers. If a value falls outside this range, it is flagged as invalid. A data value from the sensor listed in Test Field 1 (TF1) is flagged if it is less than Factor 1 (F1) or greater than Factor 2. This test has been applied to the following sensors (as applicable): wind speed, wind speed standard deviation, wind direction, temperature, and solar insolation.

$$F1 > TF1 > F2$$

MinMaxT Test: This is a MinMax test for wind direction standard deviation with different ranges applied for high and low wind speeds. A wind direction standard deviation data value (TF1) is flagged either if it is less than Factor 1, if the wind speed (TF2) is less than Factor 4 and the wind direction standard deviation is greater than Factor 2, or if the wind speed is greater than or equal to Factor 4 and the wind direction standard deviation is greater than Factor 3.

$$\begin{aligned}
 & (\text{TF1} < \text{F1}) \\
 & \text{or } (\text{TF2} < \text{F4} \text{ and } \text{TF1} > \text{F2}) \\
 & \text{or } (\text{TF2} \geq \text{F4} \text{ and } \text{TF1} > \text{F3})
 \end{aligned}$$

Icing Test: An icing event occurs when ice collects on a sensor and degrades its performance. Icing events are characterized by the simultaneous measurements of near-zero standard deviation of wind direction, non-zero wind speed, and near- or below-freezing temperatures. Wind speed, wind speed standard deviation, wind direction, and wind direction standard deviation data values are flagged if the wind direction standard deviation (CF1) is less than or equal to Factor 1 (F1), the wind speed (TF1) is greater than Factor 2 (F2), and the temperature (CF2) is less than Factor 3 (F3). To exit an icing event, the wind direction standard deviation must be greater than Factor 4 (F4).

$$\text{CF1} \leq \text{F1} \text{ and } \text{TF1} > \text{F2} \text{ and } \text{CF2} < \text{F3}$$

CompareSensors Test: Where primary and redundant sensors are used, it is possible to determine when one of the sensors is not performing properly. For anemometers, poor performance is characterized by low data values. Therefore, if one sensor of the pair reports values significantly below the other, the low values are flagged. At low wind speeds (Test Fields 1 and 2 less than or equal to Factor 3) wind speed data are flagged if the absolute difference between the two wind speeds is greater than Factor 1. At high wind speeds (Test Fields 1 or 2 greater than Factor 3) wind speed data are flagged if the absolute value of the ratio of the two wind speeds is greater is greater than Factor 2.

$$\begin{aligned}
 & [\text{TF1} \leq \text{F3} \text{ and } \text{TF2} \leq \text{F3} \text{ and } \text{abs}(\text{TF1} - \text{TF2}) > \text{F1}] \\
 & \text{or } [(\text{TF1} > \text{F3} \text{ or } \text{TF2} > \text{F3}) \text{ and } (\text{abs}(1 - \text{TF1} / \text{TF2}) > \text{F2} \text{ or } \text{abs}(1 - \text{TF2} / \text{TF1}) > \text{F2})]
 \end{aligned}$$

Sensor Statistics

Expected Data Points: the total number of sample intervals between the start and end dates (inclusive).

Actual Data Points: the total number of data points recorded between the start and end dates.

% Data Recovered: the ratio of actual and expected data points (this is the *gross data recovered percentage*).

Hours Out of Range: total number of hours for which data were flagged according to MinMax and MinMaxT tests. These tests flag data which fall outside of an expected range.

Hours of Icing: total number of hours for which data were flagged according to Icing tests. This test uses the standard deviation of wind direction, air temperature, and wind speed to determine when sensor icing has occurred.

Hours of Fault: total number of hours for which data were flagged according to CompareSensors tests. These tests compare two sensors (e.g. primary and redundant anemometers installed at the same height) and flag data points where one sensor differs significantly from the other.

% Data Good: the filter results are subtracted from the gross data recovery percentage to yield the *net data recovered percentage*.

SECTION 6 - Data Summary

This report contains several types of wind data graphs. Unless otherwise noted, each graph represents data from 1 quarter (3 months). The following graphs are included:

- Time Series – 10-minute average wind speeds are plotted against time for all data starting in Mid-January, 2006 through February 28th, 2006 in Figure 2. The data do not represent the entire winter quarter because the tower was not erected until January 20th, 2006. This plot presents data at 49 meters.
- Wind Speed Distribution – A histogram plot giving the percentage of time that the wind is at a given wind speed. Figure 3 shows that the wind speeds ranged between 4 and 5 m/s (8.9 and 11.2 mph) approximately 15% of the time. This plot presents data at 49 meters and is drawn from the entire dataset.
- Monthly Average Wind Speeds – This plot shows the trends in the mean monthly wind speed at a height of 49 m. This graph shows the trends in the wind speed over the year. The monthly average wind speed plot is shown in Figure 4 and presents only data from February 2006. The monthly average wind speed data is limited because the tower was not erected until January 20th, 2006.
- Diurnal – A plot of the average wind speed for each hour of the day. Figure 5 shows that the hourly average varied between 5.5 and 8 m/s (12.3 and 17.9 mph), with the highest average speeds in the afternoon. This plot presents data at 49 meters and is drawn from the entire dataset.
- Turbulence Intensity – A plot of turbulence intensity as a function of wind speed. Turbulence Intensity is calculated as the standard deviation of the wind speed divided by the wind speed and is a measure of the gustiness of a wind resource. Lower turbulence results in lower mechanical loads on a wind turbine. In general, turbulence intensities range from 0.1 to 0.4; for Mattapoisett, the average turbulence intensity was 0.16. In Figure 6, the turbulence intensity flattens out

between 5 and 6 m/s (11.2 and 13.4 mph). This plot presents data at 49 meters and is drawn from the entire dataset.

- Wind Rose – A plot, by compass direction showing the percentage of time that the wind comes from a given direction and the average wind speed in that direction. Figure 7 shows the prevailing direction from the west. The wind blew from the WNW 15.43% of the time with a mean wind speed of 6.6 m/s (14.9 mph). This plot presents data at 49 meters and is drawn from the entire dataset.

SECTION 7- Graphs

Data for the wind speed histograms, monthly and diurnal average plots, and wind roses are included in APPENDIX B.

Wind Speed Time Series

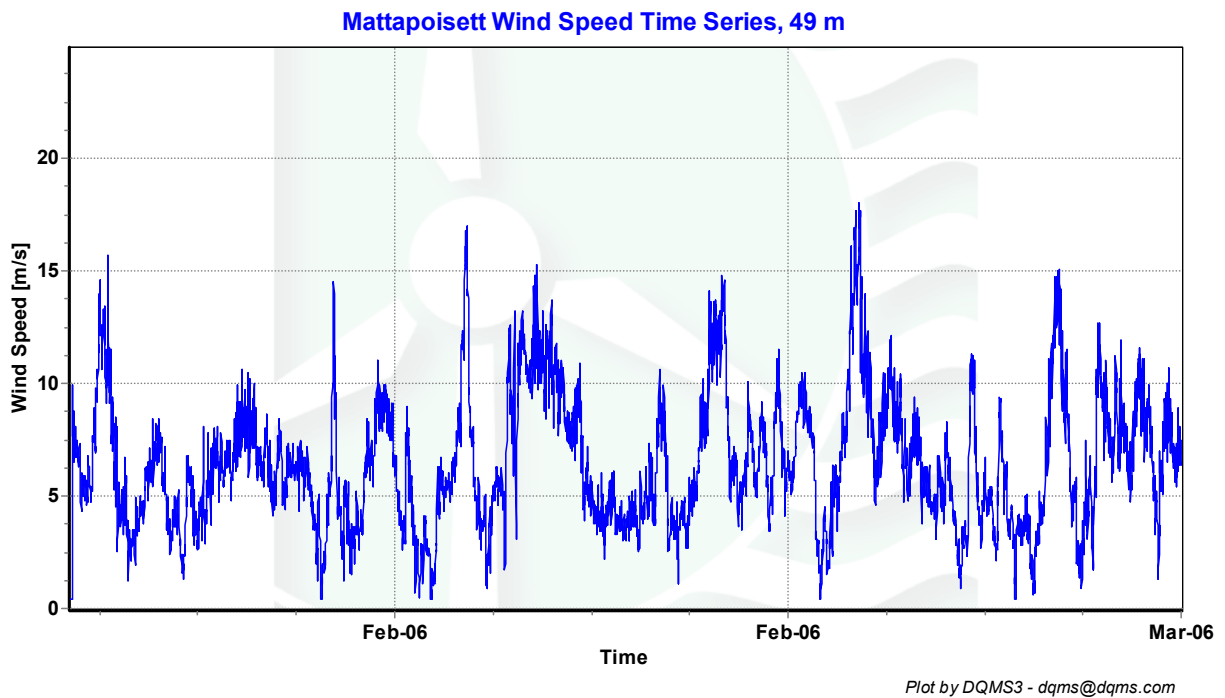


Figure 2 – Wind Speed Time Series, Jan 20, 2006 through Feb 28, 2006

Wind Speed Distributions

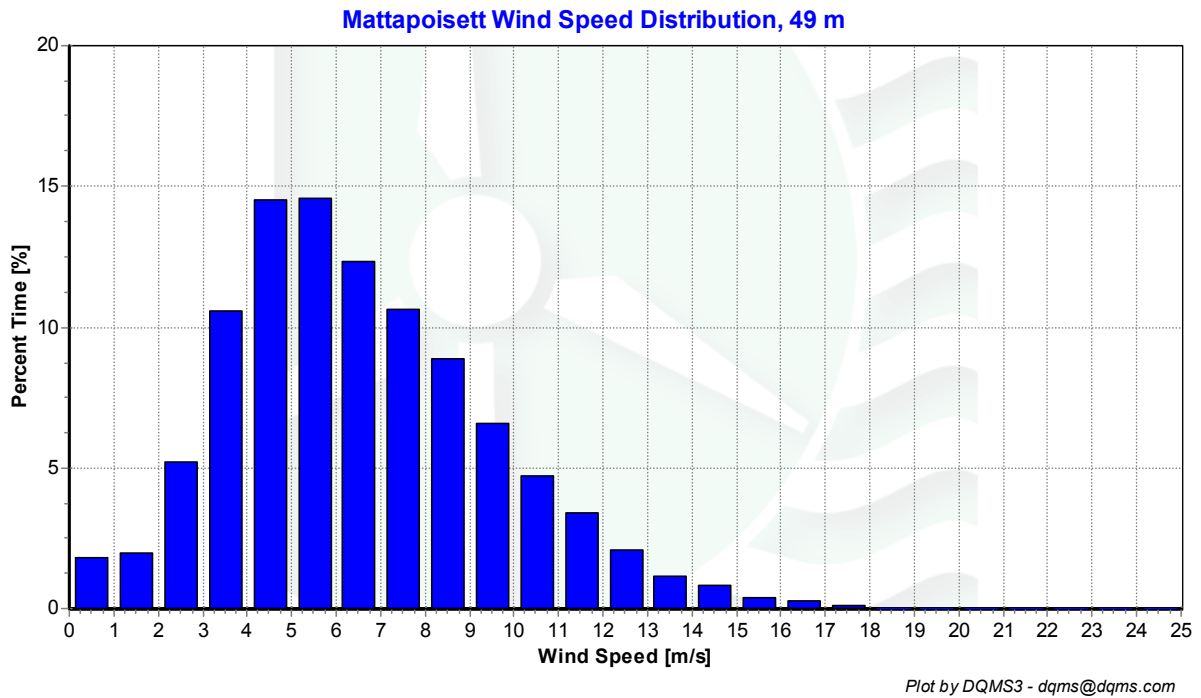


Figure 3 – Wind Speed Distribution, Jan 20, 2006 through Feb 28, 2006

Monthly Average Wind Speeds

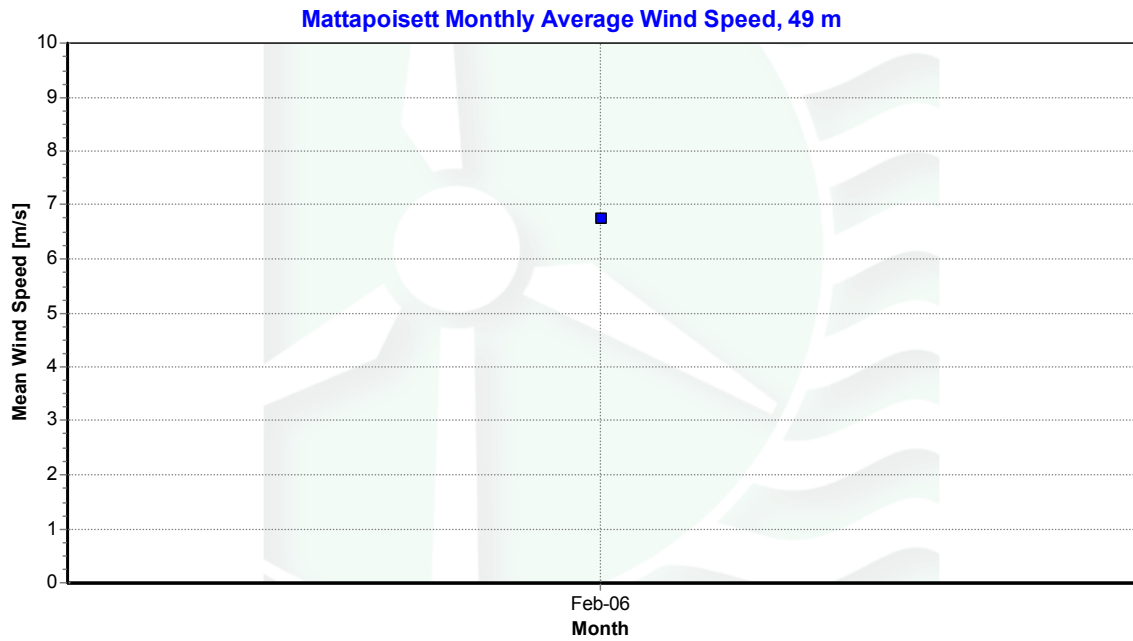


Figure 4 – Monthly Average Wind Speed, Feb 2006

Diurnal Average Wind Speeds

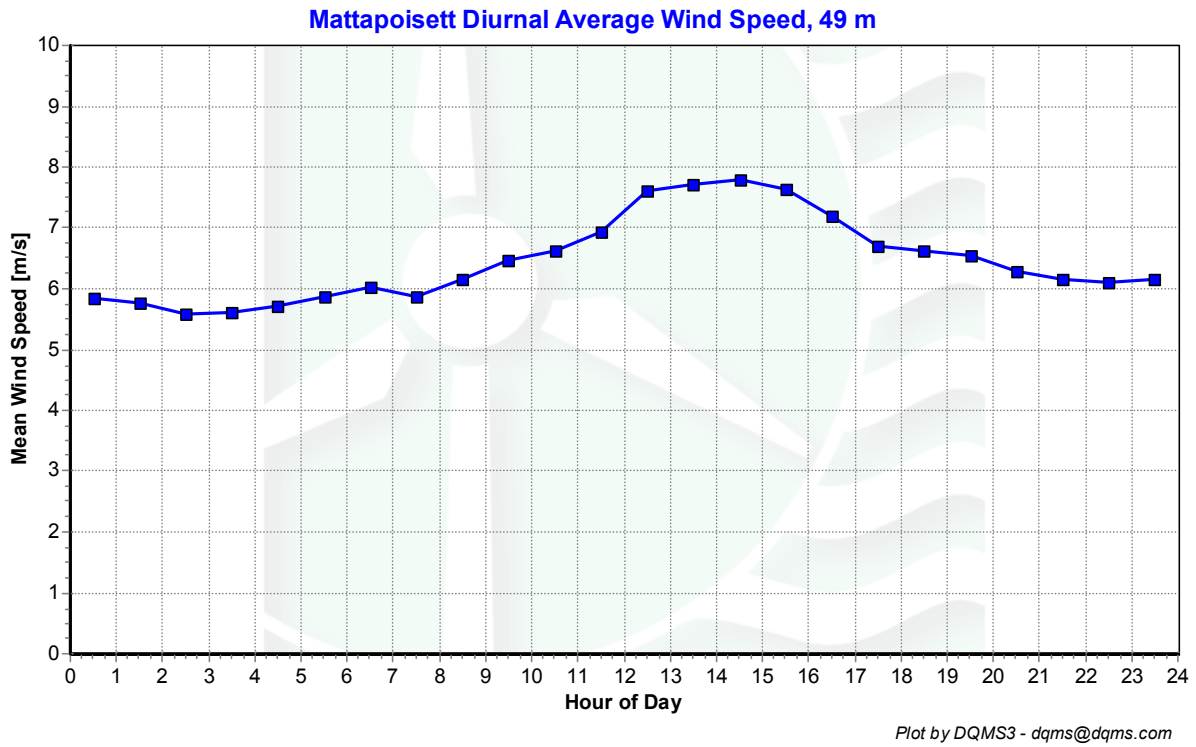


Figure 5 – Diurnal Average Wind Speed, Jan 20, 2006 through Feb 28, 2006

Turbulence Intensities

Mattapoisett Turbulence Intensity, 49 m


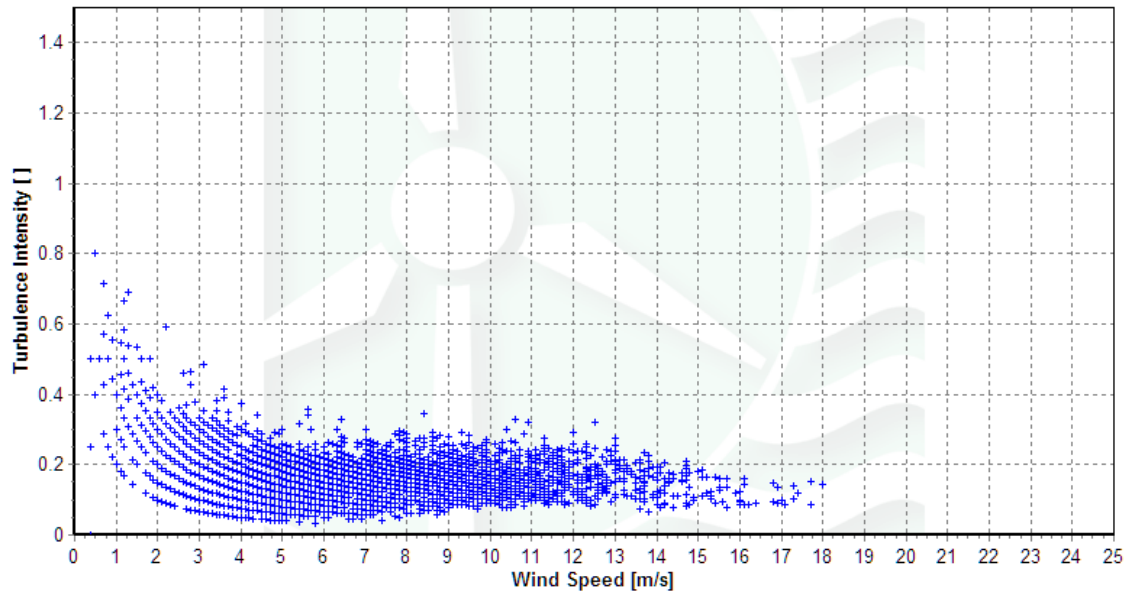


Figure 6 – Turbulence Intensity, Jan 20, 2006 through Feb 28, 2006

Wind Roses

Mattapoisett Wind Rose, 49 m

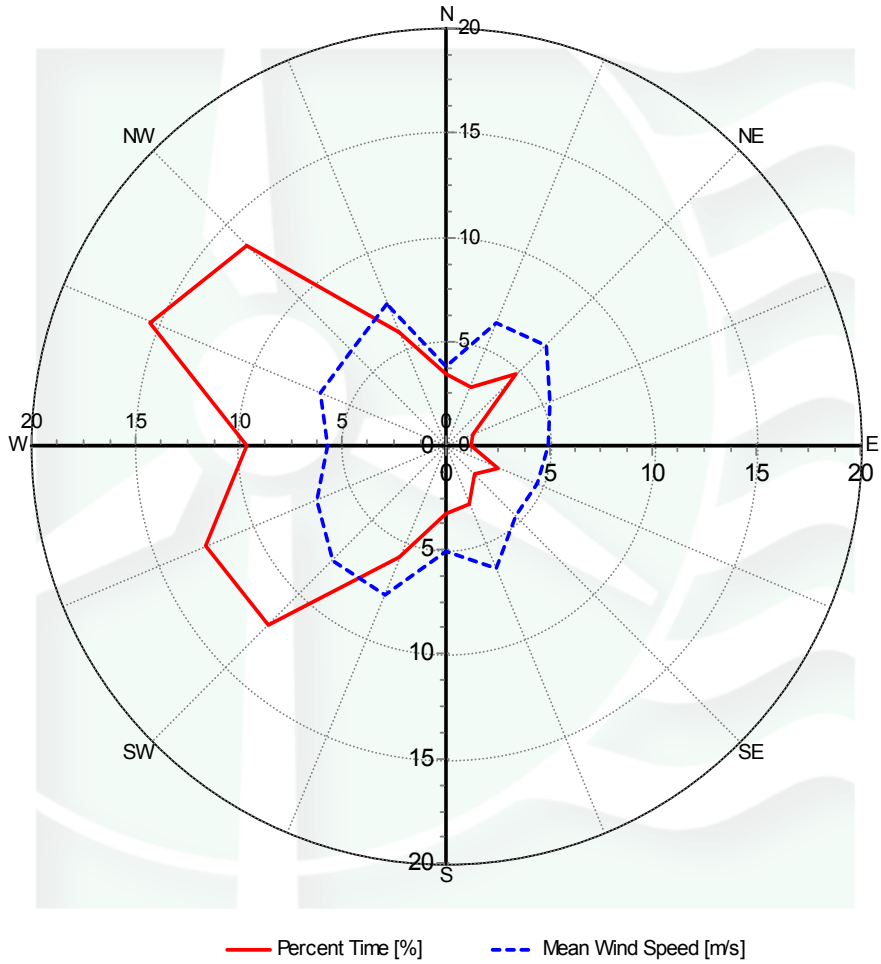

Plot by DQMS3 - dqms@dqms.com

Figure 7 – Wind Rose, Jan 20, 2006 through Feb 28, 2006

APPENDIX A - Sensor Performance Report

Test Definitions

Test Order	TestField1	TestField2	TestField3	CalcField1	CalcField2	TestType	Factor1	Factor2	Factor3	Factor4
1							TimeTest Insert			
2	Etmp2aDEGC						MinMax	Etmp2aDEGC		
3	Etmx2aDEGC						MinMax	Etmx2aDEGC		
4	Etmn2aDEGC						MinMax	Etmn2aDEGC		
5	EtmpSD2aDEGC						MinMax	EtmpSD2aDEGC		
10	Anem49aMS						MinMax	Anem49aMS		
11	Anem49bMS						MinMax	Anem49bMS		
12	Anem38aMS						MinMax	Anem38aMS		
13	Anem38bMS						MinMax	Anem38bMS		
14	Anem20aMS						MinMax	Anem20aMS		
15	Anem49yMS						MinMax	Anem49yMS		
16	Anem38yMS						MinMax	Anem38yMS		
20	AnemSD49aMS						MinMax	AnemSD49aMS		
21	AnemSD49bMS						MinMax	AnemSD49bMS		
22	AnemSD38aMS						MinMax	AnemSD38aMS		
23	AnemSD38bMS						MinMax	AnemSD38bMS		
24	AnemSD20aMS						MinMax	AnemSD20aMS		
25	AnemSD49yMS						MinMax	AnemSD49yMS		
26	AnemSD38yMS						MinMax	AnemSD38yMS		
30	Vane49aDEG						MinMax	Vane49aDEG		
31	Vane38aDEG						MinMax	Vane38aDEG		
32	Vane20aDEG						MinMax	Vane20aDEG		
49	Turb49zNONE						MinMax	Turb49zNONE		
51	Turb38zNONE						MinMax	Turb38zNONE		
60	Wshr0zNONE						MinMax	Wshr0zNONE		
70	VaneSD49aDEG	Anem49yMS					MinMaxT	VaneSD49aDEG	Anem49yMS	
71	VaneSD38aDEG	Anem38yMS					MinMaxT	VaneSD38aDEG	Anem38yMS	
200	VaneSD20aDEG	Anem20aMS					MinMax	VaneSD20aDEG	Anem20aMS	
201	Anem49aMS	AnemSD49aMS	Vane49aDEG	VaneSD49aDEG	Etmp2aDEGC		Icing	Anem49aMS	AnemSD49aMS	Vane49aDEG
202	Anem49bMS	AnemSD49bMS	Vane49aDEG	VaneSD49aDEG	Etmp2aDEGC		Icing	Anem49bMS	AnemSD49bMS	Vane49aDEG
300	Anem38aMS	AnemSD38aMS	Vane38aDEG	VaneSD38aDEG	Etmp2aDEGC		Icing	Anem38aMS	AnemSD38aMS	Vane38aDEG
301	Anem38bMS	AnemSD38bMS	Vane38aDEG	VaneSD38aDEG	Etmp2aDEGC		Icing	Anem38bMS	AnemSD38bMS	Vane38aDEG
302	Anem20aMS	AnemSD20aMS	Vane20aDEG	VaneSD20aDEG	Etmp2aDEGC		Icing	Anem20aMS	AnemSD20aMS	Vane20aDEG
303	Anem49yMS	AnemSD49yMS	Vane49aDEG	VaneSD49aDEG	Etmp2aDEGC		Icing	Anem49yMS	AnemSD49yMS	Vane49aDEG
304	Anem38yMS	AnemSD38yMS	Vane38aDEG	VaneSD38aDEG	Etmp2aDEGC		Icing	Anem38yMS	AnemSD38yMS	Vane38aDEG
400	Anem49aMS	Anem49bMS					CompareSensors	Anem49aMS	Anem49bMS	
401	Anem38aMS	Anem38bMS					CompareSensors	Anem38aMS	Anem38bMS	
490	Amax49aMS						MinMax	Amax49aMS		
491	Amax49bMS						MinMax	Amax49bMS		

492	Amax38aMS						MinMax	Amax38aMS		
493	Amax38bMS						MinMax	Amax38bMS		
494	Amax20aMS						MinMax	Amax20aMS		
510	Amin49aMS						MinMax	Amin49aMS		
511	Amin49bMS						MinMax	Amin49bMS		
512	Amin38aMS						MinMax	Amin38aMS		
513	Amin38bMS						MinMax	Amin38bMS		
514	Amin20aMS						MinMax	Amin20aMS		
520	Vmax49aDEG						MinMax	Vmax49aDEG		
521	Vmax38aDEG						MinMax	Vmax38aDEG		
522	Vmax20aDEG						MinMax	Vmax20aDEG		
530	Vmin49aDEG						MinMax	Vmin49aDEG		
531	Vmin38aDEG						MinMax	Vmin38aDEG		
532	Vmin20aDEG						MinMax	Vmin20aDEG		

Sensor Statistics

Sensors	Expected Data Points	Actual Data Points	% Data Recovered	Hours Out of Range	Hours of Icing	Hours of Fault	% Data Good
Anem49ams	5695	5695	100	0.167	27.5	0.333	97.05
AnemSD49ams	5695	5695	100	0.167	27.5	0.333	97.05
Anem49bms	5695	5695	100	0.167	29	16.667	95.171
AnemSD49bms	5695	5695	100	0.167	29	16.667	95.171
Anem38aMS	5695	5695	100	0	19.833	0	97.91
AnemSD38aMS	5695	5695	100	0	19.833	0	97.91
Anem38bMS	5695	5695	100	0	19.167	13.833	96.523
AnemSD38bMS	5695	5695	100	0	19.167	13.833	96.523
Anem20aMS	5695	5695	100	0	13.667	0	98.56
AnemSD20aMS	5695	5695	100	0	13.667	0	98.56
Vane49aDEG	5695	5695	100	0	29	0	96.945
VaneSD49aDEG	5695	5695	100	0	29	0	96.945
Vane38aDEG	5695	5695	100	0	19.833	0	97.91
VaneSD38aDEG	5695	5695	100	0	19.833	0	97.91
Vane20aDEG	5695	5695	100	0.167	13.667	0	98.543
VaneSD20aDEG	5695	5695	100	0.167	13.667	0	98.543
Etmp2aDEGC	5695	5695	100	1.833	0	0	99.807
EtmpSD2aDEGC	5695	5695	100	0	0	0	100
Total	102510	102510	100	2.833	343.333	61.667	97.613

APPENDIX B - Plot Data

Wind Speed Distribution Data

Bin Center Wind Speed [m/s]	Percent of Time [%]
0.5	1.8
1.5	1.97
2.5	5.18
3.5	10.58
4.5	14.53
5.5	14.56
6.5	12.35
7.5	10.63
8.5	8.88
9.5	6.56
10.5	4.72
11.5	3.41
12.5	2.09
13.5	1.14
14.5	0.82
15.5	0.38
16.5	0.25
17.5	0.13
18.5	0.02
19.5	0
20.5	0
21.5	0
22.5	0
23.5	0
24.5	0

Table 1 - Wind Speed Distribution

Monthly Average Wind Speed Data

Date	10 min Mean [m/s]
Feb-06	6.78

Table 2 - Wind Speed Averages, 49m

Diurnal Average Wind Speed Data

Hour of Day	Average Wind Speed [m/s]
0.5	5.84
1.5	5.77
2.5	5.58
3.5	5.6
4.5	5.7
5.5	5.86
6.5	6.03
7.5	5.87
8.5	6.16
9.5	6.46
10.5	6.62
11.5	6.95
12.5	7.62
13.5	7.72
14.5	7.79
15.5	7.63
16.5	7.19
17.5	6.69
18.5	6.62
19.5	6.55
20.5	6.29
21.5	6.16
22.5	6.11
23.5	6.17

Table 3 - Diurnal Average Wind Speeds

Wind Rose Data

Direction	Percent Time [%], 49 m	Mean Wind Speed [m/s], 49 m
N	3.47	3.79
NNE	3.08	6.34
NE	4.81	6.8
ENE	1.45	5.48
E	1.24	4.9
ESE	2.72	4.77
SE	1.95	4.76
SSE	3.04	6.37
S	3.24	5.08
SSW	5.78	7.7
SW	12.14	7.75
WSW	12.56	6.78
W	9.58	5.69
WNW	15.43	6.58
NW	13.59	6.44
NNW	5.92	7.35

Table 4 - Wind Rose, Time Percentage and Mean Wind Speed by Direction